

S Series

100 Watt AC-DC Converters



Input voltage range from 85...264 V AC
1 or 2 isolated outputs up to 48 V DC
4 kV AC I/O electric strength test voltage



- Rugged electrical and mechanical design
- Wide input frequency range from 47...440 Hz
- Operating ambient temperature range
-40...71°C with convection cooling

Selection chart

Output 1		Output 2		Input voltage	Type	Options
$U_o \text{ nom}$ [V DC]	$I_o \text{ nom}$ [A]	$U_o \text{ nom}$ [V DC]	$I_o \text{ nom}$ [A]	U_i [V AC]		
5.1	16	-	-	85...264	LS 1001-7R	-9, E, D, V, P, T, B1
12	8	-	-	85...264	LS 1301-7R	-9, E, D, P, T, B1
15	6.5	-	-	85...264	LS 1501-7R	-9, E, D, P, T, B1
24	4.2	-	-	85...264	LS 1601-7R	-9, E, D, P, T, B1
24	4	-	-	85...264	LS 2320-7R	-9, E, D, P, T, B1
30	3.2	-	-	85...264	LS 2540-7R	-9, E, D, P, T, B1
48	2	-	-	85...264	LS 2660-7R	-9, E, D, P, T, B1
12	4	12	4	85...264	LS 2320-7R	-9, E, D, P, T, B1
15	3.2	15	3.2	85...264	LS 2540-7R	-9, E, D, P, T, B1
24	2	24	2	85...264	LS 2660-7R	-9, E, D, P, T, B1

Cassette Style

S Series

Input

Input voltage AC	wide input range	85...264 V AC
Input frequency		47...440 Hz
Input voltage DC		88...372 V DC
Inrush current limitation	by thermistor	

Output

Efficiency	$\mathcal{U}_{nom}, I_{o nom}$	up to 85%
Output voltage setting accuracy	$\mathcal{U}_{nom}, I_{o nom}$	$\pm 0.6\% \mathcal{U}_{o nom}$
Output voltage switching noise	IEC/EN 61204, total	typ. 90 mV _{pp}
Line regulation	$\mathcal{U}_{i min} \dots \mathcal{U}_{i max}, I_{o nom}$	typ. $\pm 0.3\% \mathcal{U}_{o nom}$
Load regulation	$\mathcal{U}_{i nom}, 10 \dots 100\% I_{o nom}$, symmetrical output load	typ. 0.5% $\mathcal{U}_{o nom}$
Minimum load	not required	0 A
Current limitation	rectangular U/I characteristic	typ. 110% $I_{o nom}$
Operation in parallel	by current limitation	
Hold-up time	$\mathcal{U}_{nom}, I_{o nom}$	80 ms

Control and protection

Input fuse	not user accessible	4 AT
Input undervoltage lockout		typ. 90% $\mathcal{U}_{i min}$
Input overvoltage lockout		typ. 109% $\mathcal{U}_{i max}$
Input transient protection	varistor	
Output	no-load, overload and short circuit proof	
Output overvoltage	suppressor diode in each output	typ. 130% $\mathcal{U}_{o nom}$
Overtemperature	switch-off with auto restart	T_C typ. 100°C
Output voltage adjustment		0...110% $\mathcal{U}_{o nom}$
Inhibit	TTL input, output(s) disabled if open circuit	
Status indication	LEDs: OK, inhibit, overload	

Safety

Approvals	EN 60950, UL 1950, CSA 22.2 No. 950	
Class of equipment		class I
Protection degree		IP 30
Electric strength test voltage	I/case	2 kV AC
	I/O	4 kV AC
	O/case	1 kV AC
	O/O	0.1 kV AC

EMC

Electrostatic discharge	IEC/EN 61000-4-2, level 4 (8/15 kV)	criterion A
Electromagnetic field	IEC/EN 61000-4-3, level x (20 V/m)	criterion A
Electr. fast transients/bursts	IEC/EN 61000-4-4, level 4 (2/4 kV)	criterion A
Surge	IEC/EN 61000-4-5, level 3 (2 kV)	criterion A
Conducted disturbances	IEC/EN 61000-4-6, level 3 (10 V)	criterion A
Electromagnetic emissions	CISPR 22/EN 55022	class B

S Series

100 Watt AC-DC Converters

Environmental


Operating ambient temperature	$U_{i\text{ nom}}, I_{o\text{ nom}}$, convection cooled	-25...71°C
Operating case temperature T_C	$U_{i\text{ nom}}, I_{o\text{ nom}}$	-25...95°C
Storage temperature	non operational	-40...100°C
Damp heat	IEC/EN 60068-2-3, 93%, 40°C	56 days
Vibration, sinusoidal	IEC/EN 60068-2-6, 10...60/60...2000 Hz	0.35 mm/5 g _n
Shock	IEC/EN 60068-2-27, 6 ms	100 g _n
Bump	IEC/EN 60068-2-29, 6 ms	40 g _n
Random vibration	IEC/EN 60068-2-64, 20...500 Hz	4.9 g _{n rms}
MTBF	MIL-HDBK-217F, G _B , 40°C	500'000 h

Options

Extended temperature range	-40...71°C, ambient, operating	-9
Electronic inrush current limitation		E
Output voltage adjustment	40...110% $U_{o\text{ nom}}$, excludes feature R and vice versa	P
Input and/or output undervoltage monitoring, excludes option V		D0...D9
Input and/or output undervoltage monitoring (VME), excludes option D		V0, V2, V3
Current sharing		T
Cooling plate		B1

Pin allocation

Pin	LS 4000		LS 5000	
4	Vo1+	Output 1	Vo2+	Output 2
6	Vo1+		Vo2+	
8	Vo1-	Output 1	Vo2-	Output 2
10	Vo1-		Vo2-	
12	S+	Sense	Vo1+	Output 1
14	S-	Sense	Vo1-	
16	R	Control of U_{o1}	R	Control of U_{o1}
18	i	Inhibit	i	Inhibit
20	D	Save data	D	Save data
	V	ACFAIL		
22	T	Current sharing	T	Current sharing
24	⊕	Protective earth	⊕	Protective earth
26	N~	Neutral	N~	Neutral
28	N~		N~	
30	P~	Phase	P~	Phase
32	P~		P~	

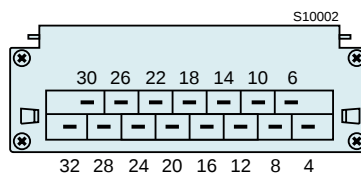


Cassette Style

S Series

Mechanical data

Tolerances ± 0.3 mm (0.012") unless otherwise indicated.

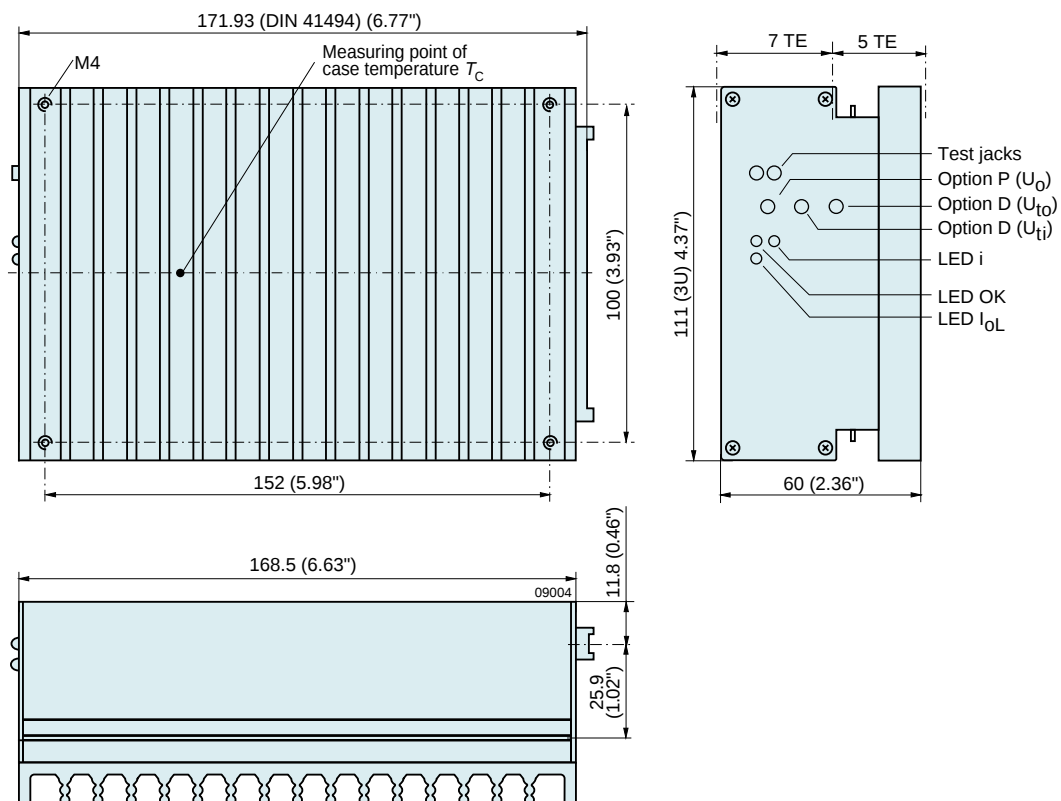

Accessories

Front panels 19" (Schroff/Intermas)
 Mating H15 connectors with screw, solder, fast-on or press-fit terminals
 Connector retention facilities and code key system for connector coding
 Chassis or wall mounting plates for frontal access
 Universal mounting brackets for chassis or DIN-rail mounting