

T1/CEPT/ISDN-PRI TRANSFORMER



LANKom Electronics Co., Ltd.
連康電子股份有限公司

Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: 1CT:2.42CT $\pm 5\%$

OCL: 1.20mH Minimum @100KHz 20mV


Leakage Inductance : 0.6uH Maximum

Cw/w : 25pF Maximum


PRI DCR : 0.70 Ohms Maximum

SEC DCR : 1.20 Ohms Maximum

Mechanicals:

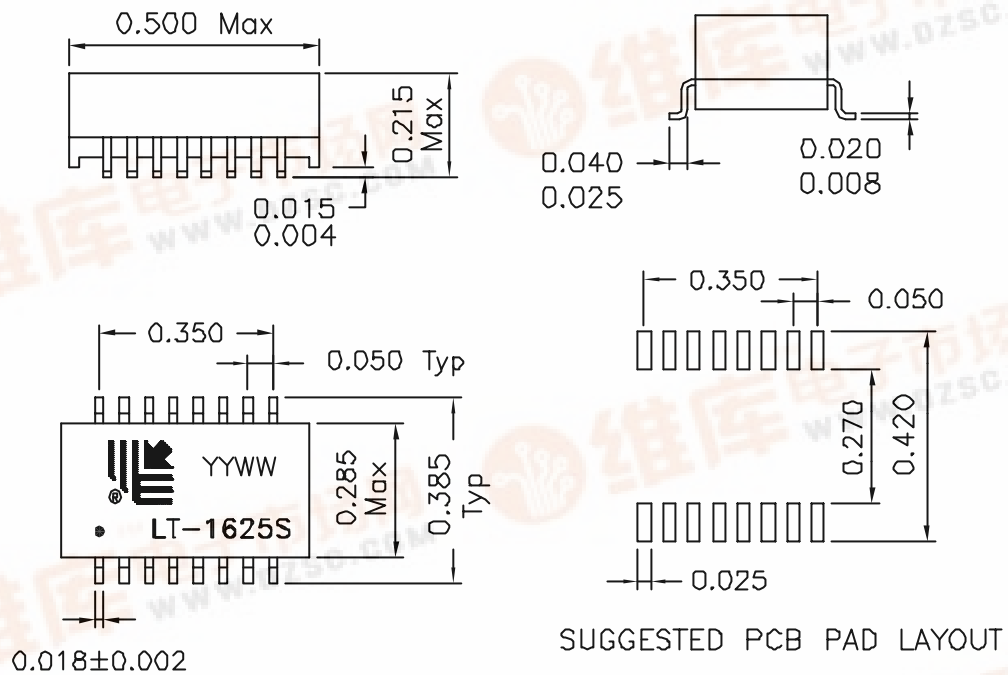

Schematics:

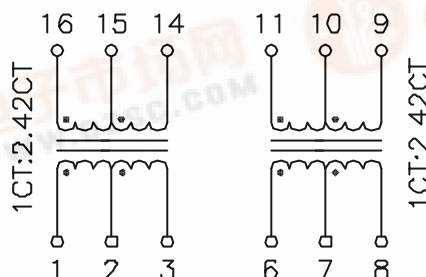

*Specification Subject to Change Without Notice

DIMENSIONS IN INCH

SCALE: NONE

Unless otherwise specified
Dim. Tolerances are:
.xxx ± 0.010

REV: A1

PAGE:1/1

DRWN:

APPD:

DATE:03-08-05

DATE:

