


FAIRCHILD
SEMICONDUCTOR™

0.56 INCH (14.2 MM) SINGLE DIGIT STICK DISPLAY DIAMOND Font

BRIGHT RED MAN6161C, MAN6181C
GREEN MAN6461C, MAN6481C
HIGH EFF. RED MAN6961C, MAN6981C

PACKAGE DIMENSIONS

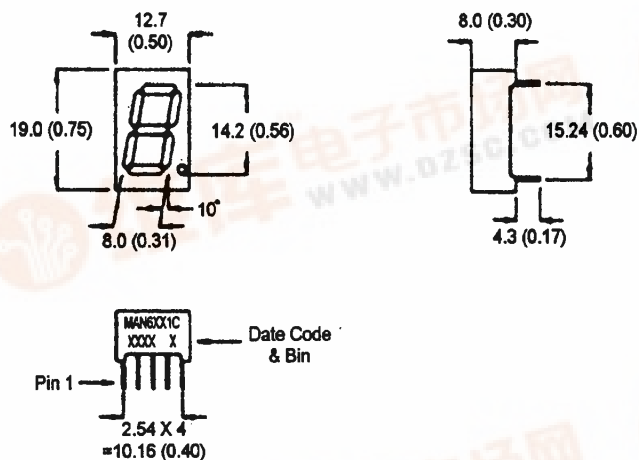

NOTES: Dimensions are in mm (inch).
All pins are 0.5 (0.02) diameter
Tolerances are ± 0.25 (0.1) unless otherwise noted.

FEATURES

- Easy to read digit
- Common anode or cathode
- Low power consumption
- Highly visible bold segments
- High brightness with high contrast
- White segments on a grey face for MAN64X1C and MAN61X1C.
- Red segments and red face for MAN69X1C
- Directly compatible with integrated circuits
- Rugged plastic/epoxy construction

APPLICATIONS

- Digital readout displays
- Instrument panels

MODEL NUMBERS

Part number	Color	Description
MAN6161C	Bright Red	Common Anode; right hand decimal
MAN6181C	Bright Red	Common Cathode; right hand decimal
MAN6461C	Green	Common Anode; right hand decimal
MAN6481C	Green	Common Cathode; right hand decimal
MAN6961C	High efficiency red	Common Anode; right hand decimal
MAN6981C	High efficiency red	Common Cathode; right hand decimal

(For other color options, contact your local area Sales Office)

**0.56 INCH (14.2 MM)
SINGLE DIGIT STICK DISPLAY
DIAMOND Font**

ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$ unless otherwise specified)


Part number	B.Red MAN 6161C 6181C	Green MAN 6461C 6481C	High Eff. Red MAN 6961C 6981C	Unit
Continuous forward current (I_f) Per Segment	15	30	30	mA
Peak forward current per die (I_f) (at $f = 10.0$ KHz, Duty factor = 1/10)	60	90	90	mA
Power dissipation (P_D)	40*	70*	70*	mW
*Derate Linearly from 25°C	0.17	0.33	0.33	mW/ $^{\circ}\text{C}$
Reverse voltage per dice.....				5V
Operating and Storage temperature range.....				-25°C to $+85^{\circ}\text{C}$
Lead soldering time (at 1/16 inch from the bottom of lamp).....				5 seconds @ 230°C

ELECTRO - OPTICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$ unless otherwise specified)


Part number	Bright Red MAN 6161C 6181C	Green MAN 6461C 6481C	High Eff. Red MAN 6961C 6981C	Test Condition
Luminous intensity (ucd)				
minimum	300	800	900	$I_f = 20\text{mA}$
typical	700	2200	2200	$I_f = 20\text{mA}$
Forward voltage (V_f)				
typical	2.1	2.1	2.0	$I_f = 20\text{mA}$
maximum	2.6	2.8	2.8	
Peak wavelength (nm)	697	570	635	$I_f = 20\text{mA}$
Spectral line half width (nm)	90	30	45	$I_f = 20\text{mA}$
Reverse breakdown voltage (V_R)	5	5	5	$I_r = 100\mu\text{A}$

PINOUT

MAN6X61C - Common Anode

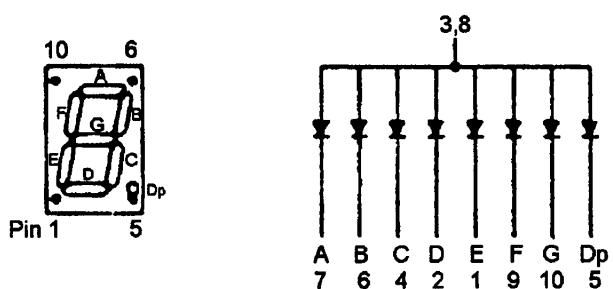

MAN6X81C - Common Cathode

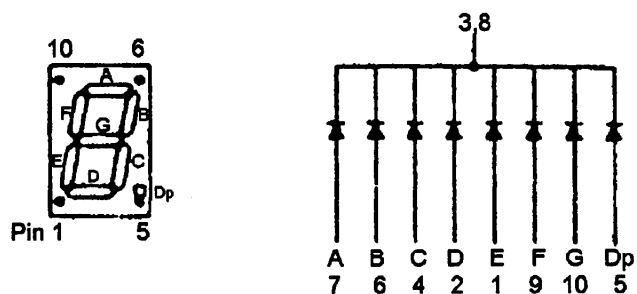

**0.56 INCH (14.2 MM)
SINGLE DIGIT STICK DISPLAY
DIAMOND Font**

GRAPHICAL DATA - Bright Red ($T_A = 25^\circ\text{C}$ unless otherwise specified)

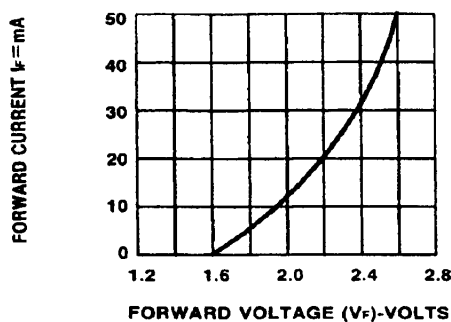


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

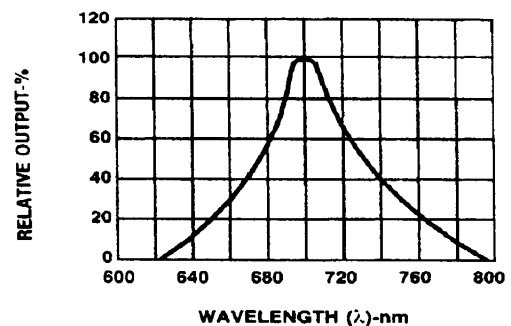


Fig.2 SPECTRAL RESPONSE

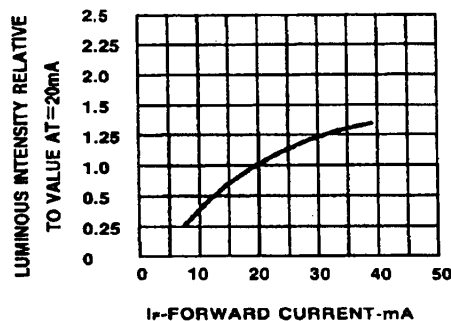


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

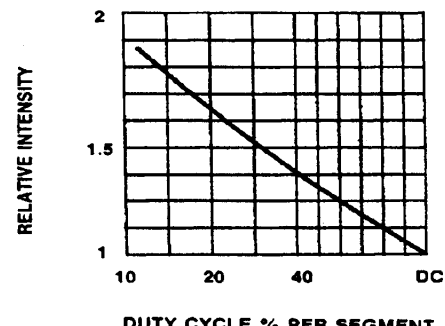


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

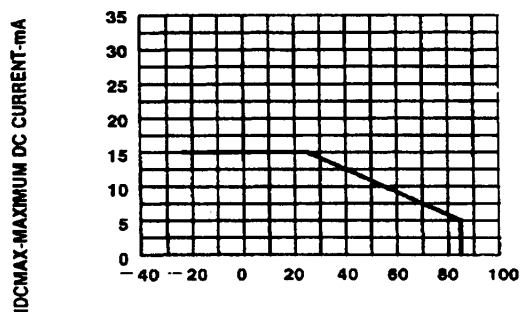


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.

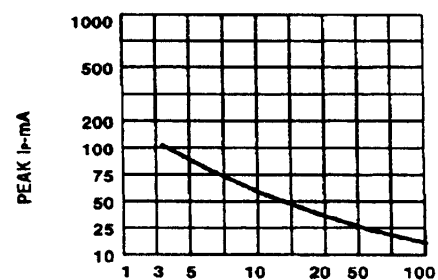


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE $f = 1 \text{ KHz}$)

GRAPHICAL DATA - Green ($T_A = 25^\circ\text{C}$ unless otherwise specified)

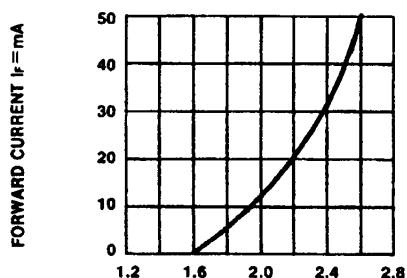


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.



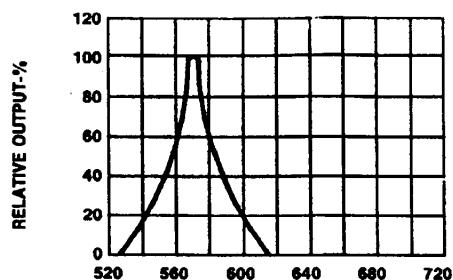



Fig.2 SPECTRAL RESPONSE

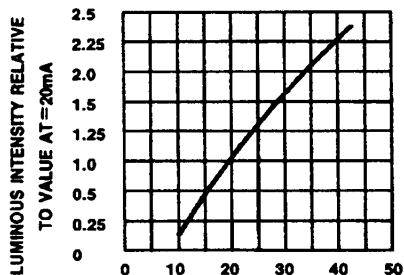


**Fig.3 RELATIVE LUMINOUS INTENSITY
VS. FORWARD CURRENT**

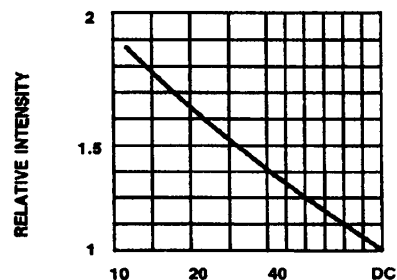

**Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE
(AVERAGE $I_F = 10\text{mA}$)**

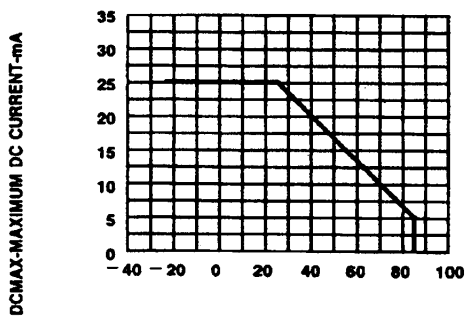

**Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER
SEGMENT CS. A FUNCTION OF AMBIENT
TEMPERATURE.**

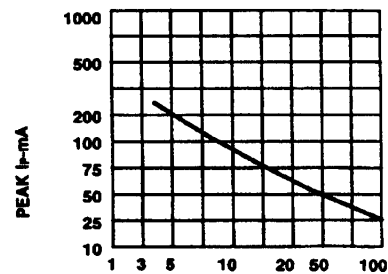

**Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE %
(REFRESH RATE $f = 1\text{ KHz}$)**

GRAPHICAL DATA - High Efficiency Red ($T_A = 25^\circ\text{C}$ unless otherwise specified)

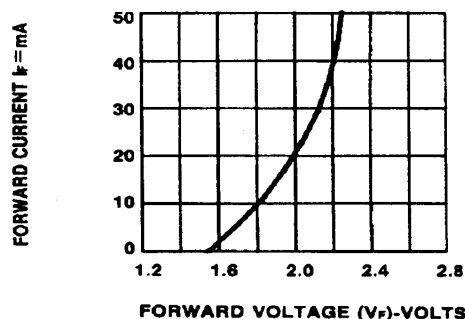


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

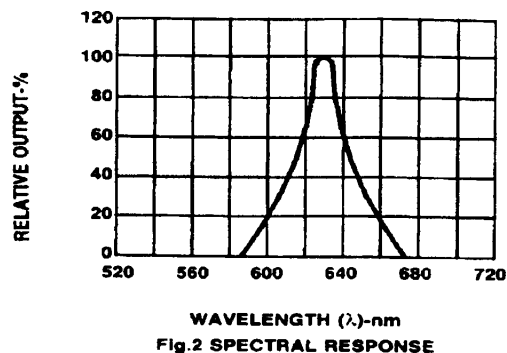


Fig.2 SPECTRAL RESPONSE

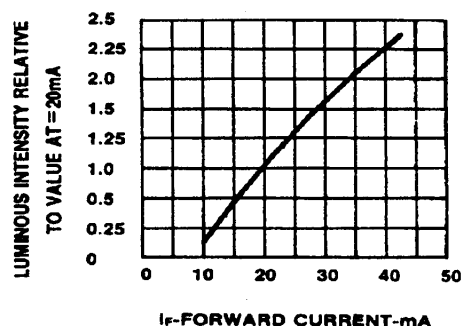


Fig.3 RELATIVE LUMINOUS INTENSITY
VS. FORWARD CURRENT

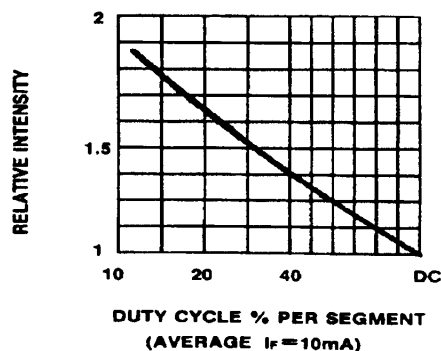


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

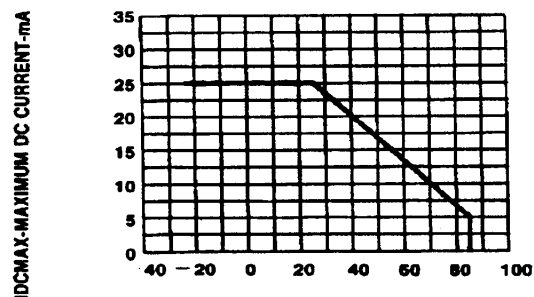


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER
SEGMENT VS. A FUNCTION OF AMBIENT
TEMPERATURE.

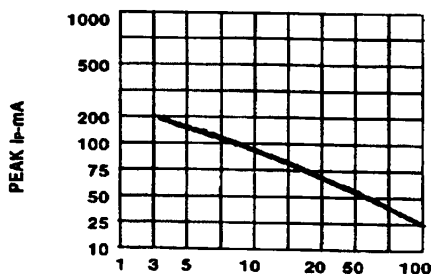


Fig. 6 MAX PEAK CURRENT VS. DUTY CYCLE %
(REFRESH RATE $f = 1 \text{ KHz}$)



0.56 INCH (14.2 MM) SINGLE DIGIT STICK DISPLAY DIAMOND Font

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.