
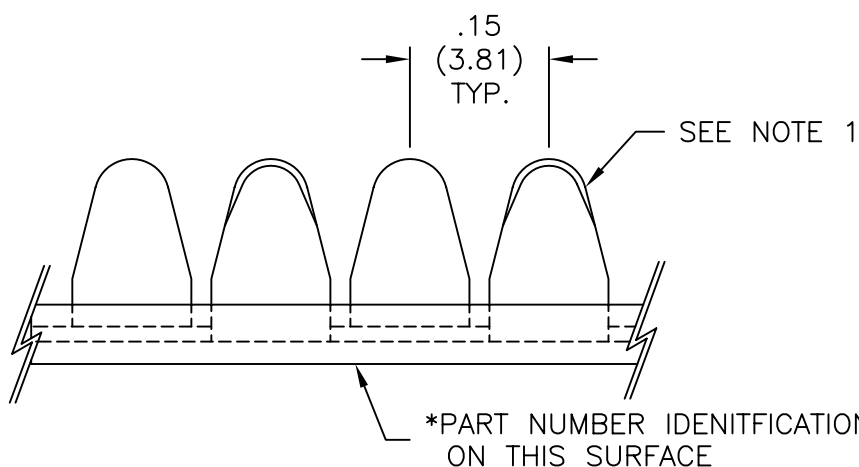


DRAWING 1 OF 2

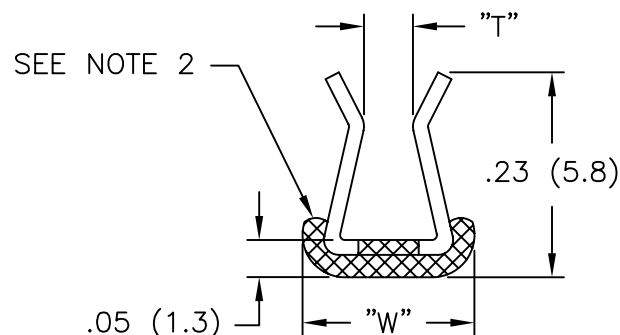

NOTES:

1. MAT'L: 300 SERIES STAINLESS STEEL
COATING: FUSION BONDED NYLON 11
COLOR: BLACK
2. POLYMER CUSHION: POLYESTER-ETHER-ESTER ELASTOMER.
46 DUROMETER, SHORE D
COLOR: BLACK
3. HAND HELD CUTTING TOOL NEEDED,
ORDER PART NUMBER MCGS-1.
4. FITS ANY TWO AXIS CONTOUR.

25 FT. PACK WITH SHEARS * PART NO.	100 FT. REEL PART NO.	"W"	"T" APPLICATION THICKNESS
MCCG-1N-PK	MCCG-1N	.19 (4.8)	.025-.036 (0.6-0.9)
MCCG-2N-PK	MCCG-2N		.037-.055 (0.9-1.4)
MCCG-3N-PK	MCCG-3N		.056-.074 (1.4-1.9)
MCCG-4N-PK	MCCG-4N	.22 (5.6)	.075-.093 (1.9-2.4)
MCCG-6N-PK	MCCG-6N		.113-.134 (2.9-3.4)

HEAT CONTINUOUS: 185°F (85°C).
SALT SPRAY: 2000 HOURS PER MIL-STD-101D.
DIELECTRIC: 1200 VOLTS @ 60Hz PER MIL-STD-202
METHOD 301.
THESE GROMMETS ARE PRIMARILY INTENDED TO
PROVIDE CHAFING PROTECTION.
SHOCK & VIBRATION:
MIL-STD-1344 METHOD 2005
TEST CONDITION VI LETTER J.
DURATION: 8 HOURS IN THE LONGITUDINAL AND 8
HOURS IN THE PERPENDICULAR DIRECTION.
SHOCK: OVERALL rms: G41.7
US PATENTS 4,769,966, 5,343,669. DOMESTIC AND
FOREIGN PATENTS PENDING

A	ADDED "POLYESTER..." TO NOTE 2. REMOVED NOTE 5. & CHANGED FILE NO.	SM 09.18.01
REV	DESCRIPTION	ENGR DATE

TITLE: METAL CONTINUOUS CUSHION GROMMET					DWG IN IN(MM)	
TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE # MCCG	DWN: E.P.	APP:	FINAL		
	MAT'L: SEE NOTES	DT: 11-9-98	DT:	PART #	PRINT TYPE	
	RE: RICHCO, INC.	RICHCO INC. PO BOX 804238,CHICAGO,60680 (773) 539-4060		SEE TABLE	CA	