

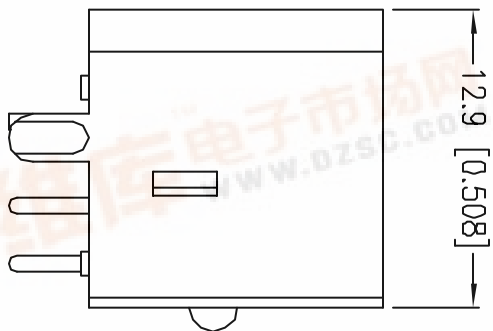


STANDARD TYPE

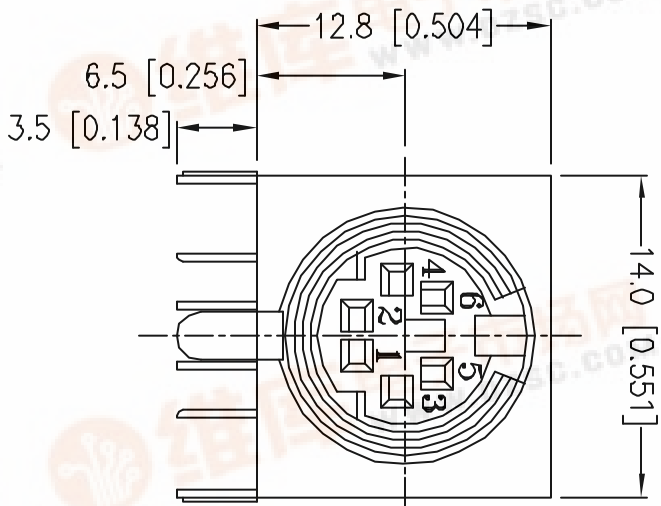

FOOTPRINT (TOP VIEW)

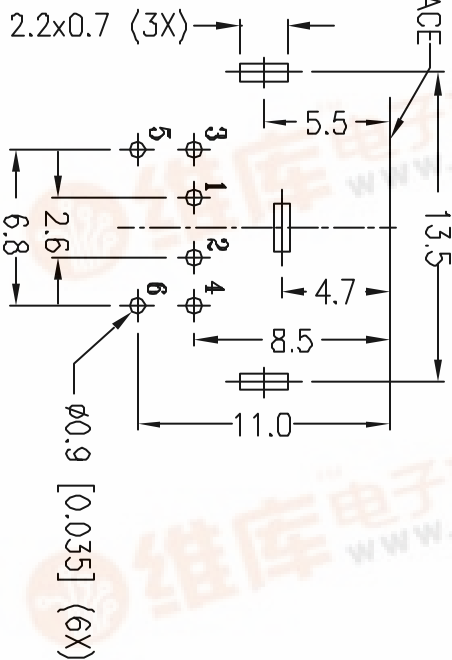

SPECIFICATIONS:

RATING: 100V AC 1A MAX OR
12V DC 2A MAX
INSULATION RESISTANCE:
50 MOHM MIN AT 250V DC
DIELECTRIC STRENGTH:
250V AC, 1 MINUTE
CONTACT RESISTANCE:
30 MOHM MAX
INSERTION FORCE:
4.5KG MAX
WITHDRAWAL FORCE:
0.9KG~3KG

CONNECTOR FACE

[查询MD-60SM供应商](#)

[捷多邦，专业PCB打样工厂，24小时加急出货](#)

PG FILE NAME:
MD-60SM.DWG

COPYRIGHT 1997 BY CUI INC.

9615 SW Allen, Suite 103
Beverton, OR 97006
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com



TITLE:
MINIATURE CIRCULAR CONNECTOR WITH SHIELD

PART NO. MD-60SM UNITS: MM
DRAWN BY: APPROVED BY: SCALE: 3