

MICRO

查询MG136-A供应商

建多邦 专业PCB打样工厂 24小时加急出货

MS136A/C (L)
MG136A/C (L)
MO136A/C (L)

LED SINGLE
DIGIT DISPLAY

SEVEN SEGMENT NUMERIC DISPLAYS

- High efficiency GaP, GaAsP/GaP
- 0.36 inch character height
- High contrast
- Common Anode direct drive -
MS136A(L), MG136A(L), MO136A(L)
- Common Cathode direct drive -
MS136C(L), MG136C(L), MO136C(L)
- Continuous uniform segments
- Wide viewing angle

AVAILABLE IN THREE COLORS :

- MS136A/C(L) Red
- MG136A/C(L) Green
- MO136A/C(L) Orange

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$)

Reverse Voltage

Peak Forward Current / Segment

Continuous Forward Current / Segment

Power Dissipation

Storage Temperature Range

Operating Temperature Range

* Note : Pulse Width = 1ms, Duty Ratio = 1/10.

VR 5V

IF/Pulse* 200mA



IF/DC 20mA

Pd 300mW

Tstg -25 to +80°C

Topr -20 to +75°C


CONNECTION

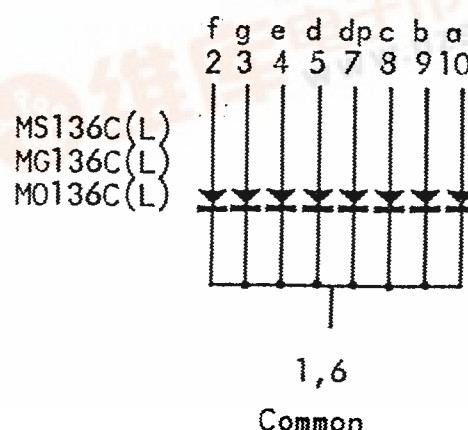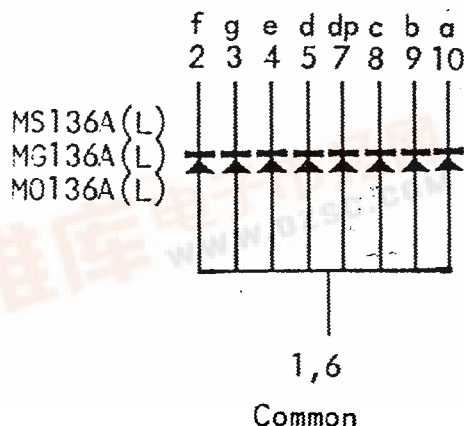

MICRO ELECTRONICS LTD. 美科有限公司

38 Hung To Road, Kwun Tong, Kowloon, Hong Kong. Cable: Microtron, Hong Kong. Telex: 43510 Micro Hx.
P.O. Box 9477, Kwun Tong, Tel: 3-430181-6, 3-893363, 3-892423, 3-898221

MECHANICAL OUTLINE

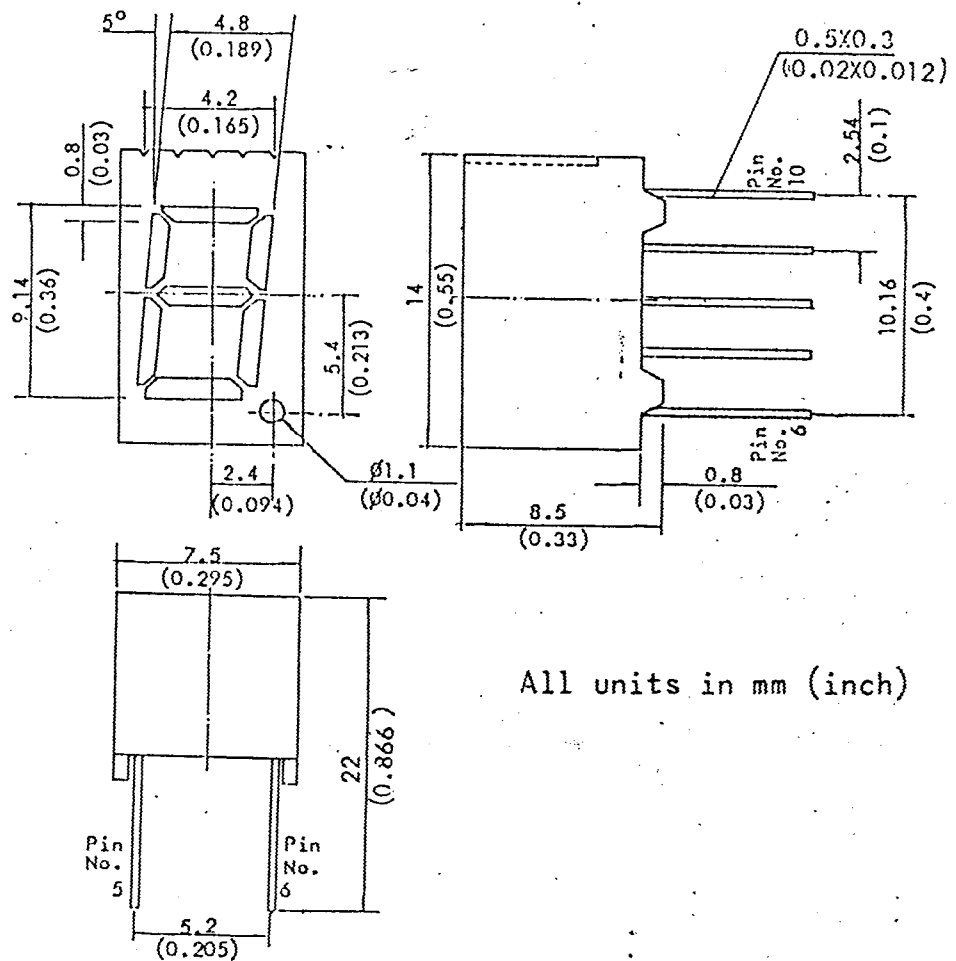

ELECTRO-OPTICAL CHARACTERISTICS PER SEGMENT (T_a=25°C)

PARAMETER	SYMBOL	MS136A(L) MS136C(L)	MG136A(L) MG136C(L)	MO136A(L) MO136C(L)	UNIT	CONDITIONS
Forward Voltage (MAX)	V _F	3	3	3	V	I _F =20mA
Luminous Intensity(MIN)	I _V	330	1200	1000	μcd	I _F =20mA
Segment to Segment Luminous Intensity Ratio		1.5:1	1.5:1	1.5:1		I _F =10mA
Wave Length At Peak Emission	λ _P	700	565	635	nm	
Spectral Half Width	Δλ	100	30	30	nm	