

MICRO

ELECTRONICS

查詢MG245A供應商

捷多邦, 专业PCB打样工厂, 24小时加急出货

MG245A/C

MY245A/C

MO245A/C

0.4" DUAL DIGIT
NUMERIC DISPLAYS

SEVEN SEGMENT NUMERIC DISPLAY

High Performance GaP, GaAsP Dice

0.4 inch Character Height

High Contrast

Wide Viewing Angle

Common Anode - MS245A, MG245A, MY245A, MO245A

Common Cathode - MS245C, MG245C, MY245C, MO245C

ABSOLUTE MAXIMUM RATINGS


	MG245			UNIT
	MS245	MY245	MO245	
Power Dissipation / Segment	40	60	75	mW
Peak Forward Current / Segment	60	80	100	mA
Continuous Forward Current / Segment	15	20	25	mA
Reverse Voltage / Segment	5	5	5	V
Operating Temperature Range	-25 to +85			°C
Storage Temperature Range	-25 to +85			°C
Lead Soldering Temperature (1/16" from body, 5 sec.)	260			°C

* Note : Pulse Width = 1mS, Duty Ratio = 1/10.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MS245	MG245	MY245	MO245	UNIT	CONDITIONS
Forward Voltage	MAX VF	3.0	3.0	3.0	3.0	V	IF=20mA
Luminous Intensity	MIN IV	350	1300	860	1050	μcd	IF=10mA
	TYP	500	2350	1300	1600	μcd	IF=10mA
Segment to Segment	MAX	2:1	2:1	2:1	2:1		IF=20mA
Luminous Intensity Ratio							
Reverse Current Any Bar	MAX IR	100	100	100	100	μA	VR=5V
Peak Wavelength	TYP λp	700	565	585	630	nm	IF=20mA
Spectral Line Half Width	TYP Δλ	100	30	35	35	nm	IF=20mA

MECHANICAL OUTLINE:

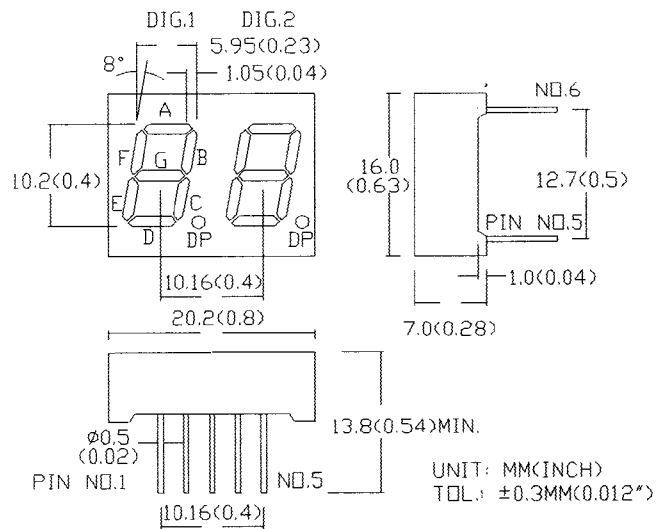

CIRCUIT DIAGRAM:

