



Small Signal Zener Diodes

Features

- Silicon planar Zener diodes.
- Standard Zener voltage tolerance is $\pm 5\%$. Other tolerances are available upon request.
- These diodes are also available in DO-35 case with the type designation 1N4681 to 1N4717 and SOD-123 case with the type designation MMSZ4681-V to MMSZ4717-V
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC



RoHS
COMPLIANT



18078

Mechanical Data

Case: SOT-23

Weight: approx. 8.8 mg

Terminals: solderable per MIL-STD-750, method 2026

Packaging codes/options:

GS18/10 k per 13" reel (8 mm tape), 10 k/box

GS08/3 k per 7" reel (8 mm tape), 15 k/box

Absolute Maximum Ratings

$T_{amb} = 25^\circ\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Zener current (see table "Characteristics")				
Power dissipation		P_{tot}	350 ¹⁾	mW

Note

¹⁾ On FR - 5 board using recommended solder pad layout.

Thermal Characteristics

$T_{amb} = 25^\circ\text{C}$, unless otherwise specified

Parameter	Test conditions	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	420 ¹⁾	K/W
Maximum junction temperature		T_j	150	$^\circ\text{C}$
Storage temperature range		T_{stg}	- 55 to + 150	$^\circ\text{C}$

Note

¹⁾ On FR - 5 board using recommended solder pad layout.

MMBZ4681-V to MMBZ4717-V



Vishay Semiconductors

Electrical Characteristics

Maximum $V_F = 0.9$ V, at $I_F = 10$ mA

Part number	Marking code	Zener voltage ¹⁾			Max. reverse current	Reverse voltage	Max. voltage change
		V_Z at $I_{ZT} = 50$ μ A			I_R	V_R	ΔV_Z ²⁾
		V			μ A	V	V
		typ.	min.	max.			
MMBZ4681-V	CF	2.4	2.28	2.52	2	1	0.80
MMBZ4682-V	CH	2.7	2.57	2.84	1	1	0.85
MMBZ4683-V	CJ	3	2.85	3.15	0.8	1	0.90
MMBZ4684-V	CK	3.3	3.14	3.47	7.5	1.5	0.95
MMBZ4685-V	CM	3.6	3.42	3.78	7.5	2	0.95
MMBZ4686-V	CN	3.9	3.71	4.10	5	2	0.97
MMBZ4687-V	CP	4.3	4.09	4.52	4	2	0.99
MMBZ4688-V	CT	4.7	4.47	4.94	10	3	0.99
MMBZ4689-V	CU	5.1	4.85	5.36	10	3	0.97
MMBZ4690-V	CV	5.6	5.32	5.88	10	4	0.96
MMBZ4691-V	CA	6.2	5.89	6.51	10	5	0.95
MMBZ4692-V	CX	6.8	6.46	7.14	10	5.1	0.90
MMBZ4693-V	CY	7.5	7.13	7.88	10	5.7	0.75
MMBZ4694-V	CZ	8.2	7.79	8.61	1	6.2	0.5
MMBZ4695-V	DC	8.7	8.27	9.14	1	6.6	0.1
MMBZ4696-V	DD	9.1	8.65	9.56	1	6.9	0.08
MMBZ4697-V	DE	10	9.50	10.5	1	7.6	0.1
MMBZ4698-V	DF	11	10.50	11.6	0.05	8.4	0.11
MMBZ4699-V	DH	12	11.40	12.6	0.05	9.1	0.12
MMBZ4700-V	DJ	13	12.40	13.7	0.05	9.8	0.13
MMBZ4701-V	DK	14	13.30	14.7	0.05	10.6	0.14
MMBZ4702-V	DM	15	14.30	15.8	0.05	11.4	0.15
MMBZ4703-V	DN	16	15.20	16.8	0.05	12.1	0.16
MMBZ4704-V	DP	17	16.20	17.9	0.05	12.9	0.17
MMBZ4705-V	DT	18	17.10	18.9	0.05	13.6	0.18
MMBZ4706-V	DU	19	18.10	20	0.05	14.4	0.19
MMBZ4707-V	DV	20	19.00	21	0.01	15.2	0.2
MMBZ4708-V	DA	22	20.90	23.1	0.01	16.7	0.22
MMBZ4709-V	DZ	24	22.80	25.2	0.01	18.2	0.24
MMBZ4710-V	DY	25	23.80	26.3	0.01	19	0.25
MMBZ4711-V	EA	27	25.70	28.4	0.01	20.4	0.27
MMBZ4712-V	EC	28	26.60	29.4	0.01	21.2	0.28
MMBZ4713-V	ED	30	28.50	31.5	0.01	22.8	0.3
MMBZ4714-V	EE	33	31.40	34.7	0.01	25	0.33
MMBZ4715-V	EF	36	34.20	37.8	0.01	27.3	0.36
MMBZ4716-V	EH	39	37.10	41	0.01	29.6	0.39
MMBZ4717-V	EJ	43	40.90	45.2	0.01	32.6	0.43

Notes

¹⁾ Tested with pulse test current

²⁾ Maximum voltage change (V_Z). Voltage change is equal to the difference between V_Z at 100 μ A and V_Z at 10 μ A.

Typical Characteristics ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

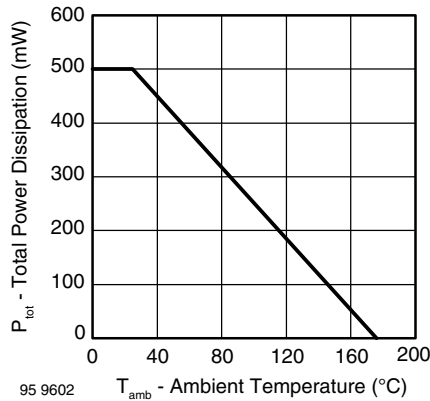


Figure 1. Total Power Dissipation vs. Ambient Temperature

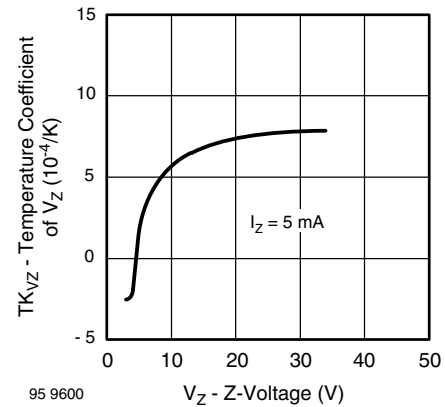


Figure 4. Temperature Coefficient of V_Z vs. Z-Voltage

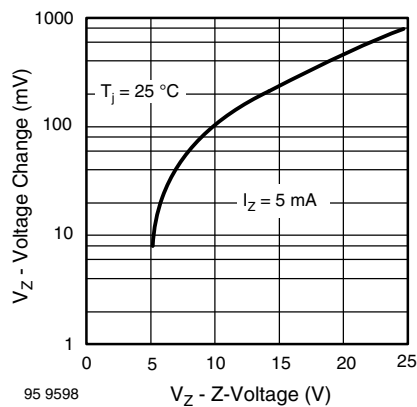


Figure 2. Typical Change of Working Voltage under Operating Conditions at $T_{amb} = 25\text{ }^{\circ}\text{C}$

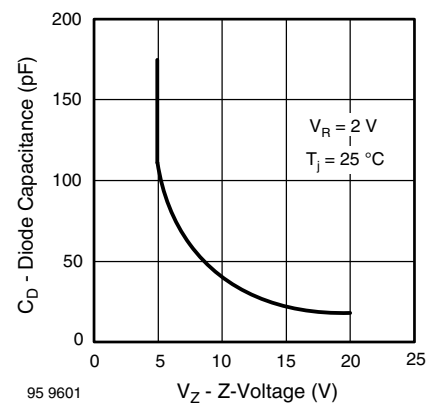


Figure 5. Diode Capacitance vs. Z-Voltage

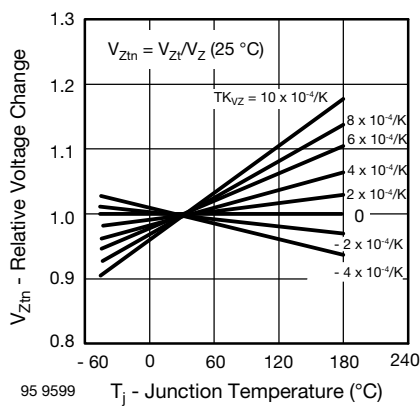


Figure 3. Typical Change of Working Voltage vs. Junction Temperature

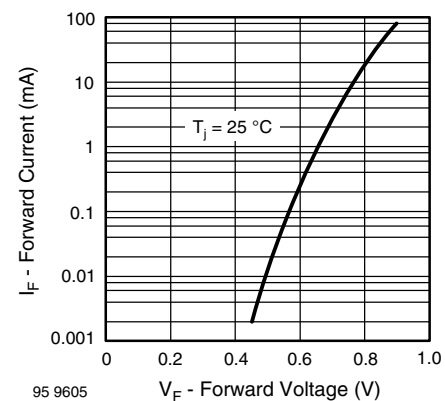


Figure 6. Forward Current vs. Forward Voltage

MMBZ4681-V to MMBZ4717-V

Vishay Semiconductors

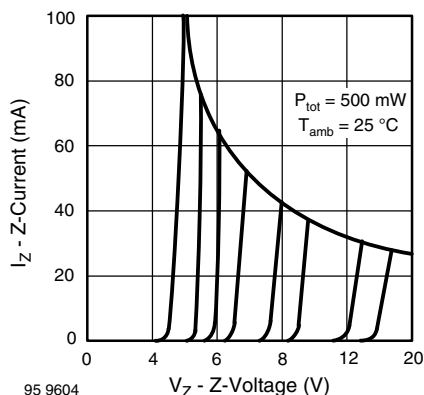


Figure 7. Z-Current vs. Z-Voltage

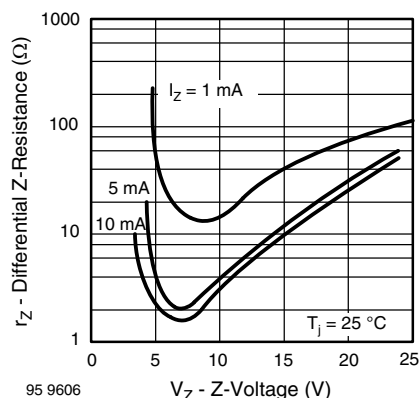


Figure 9. Differential Z-Resistance vs. Z-Voltage

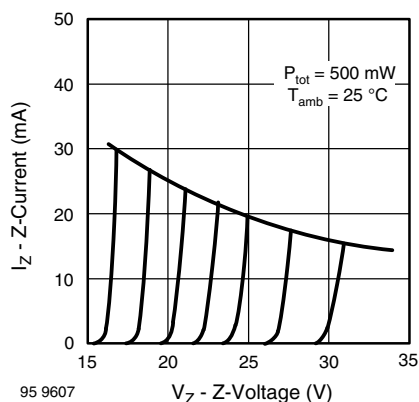


Figure 8. Z-Current vs. Z-Voltage





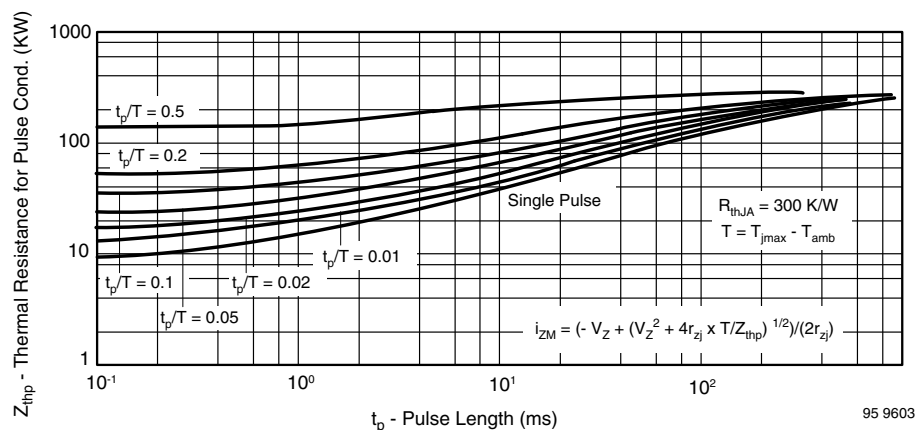


Figure 10. Thermal Response

Package Dimensions in millimeters (inches): SOT-23

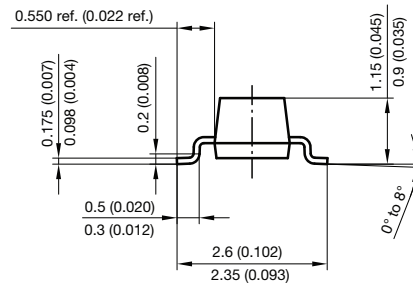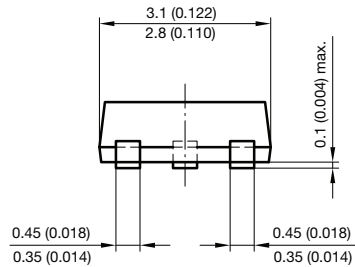

Foot print recommendation:



Document no.: 6.541-5014.01-4
Rev. 8 - Date: 23.Sept.2009
17418



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.