

SANYO

Cadnica

Cell Type N-50AAA

Specifications


Nominal Capacity			50mAh				
Nominal Voltage			1.2V				
Charging Current		Standard	5mA				
		Quick	15mA				
Charging Time		Standard	14 to 16Hrs.				
		Quick	4 to 6Hrs.				
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]				
		Quick	10°C to +45°C [+50°F to 113°F]				
	Discharge		-20°C to +60°C [-4°F to 140°F]				
	Storage		-30°C to +50°C [-22°F to 122°F]				
Internal Impedance (Av.) (at. 50% discharge)			55.0mΩ (at 1000Hz)				
Weight			4g/0.14oz				
Dimensions(D)×(H) (with tube)			10.5	⁰ _{-0.5}	× 15.8	⁰ ₋₁	mm
			0.41	⁰ _{-0.02}	× 0.62	⁰ _{-0.04}	inch




Dimensions of Bare Cell		H	15.0 ±0.3	mm
			0.591 ±0.012	inch
		D	10.0 ±0.2	mm
			0.394 ±0.008	inch
		d	5.5	mm
			0.217	inch

Typical Characteristics


Charge

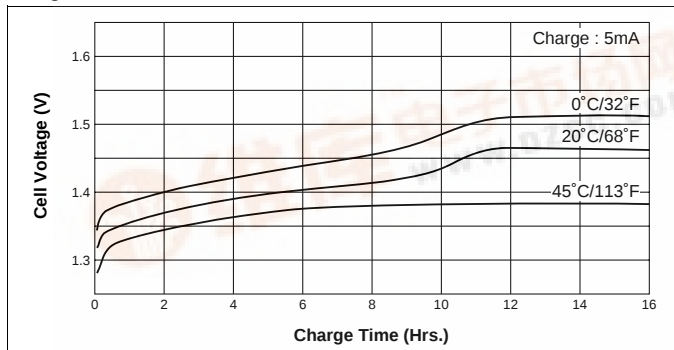


Discharge (at high rate)

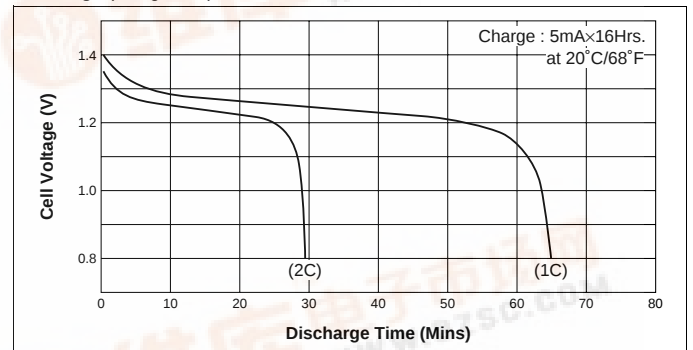


Charge

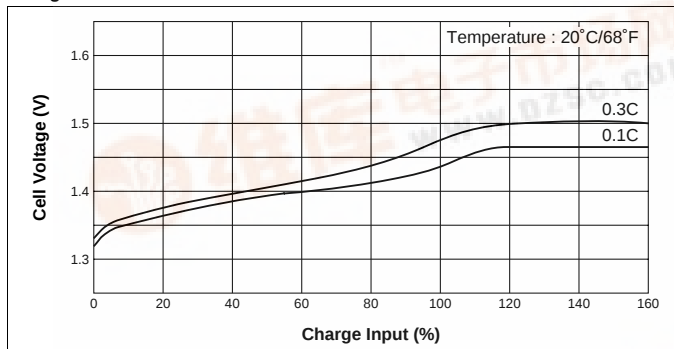

Discharge (at high rate)

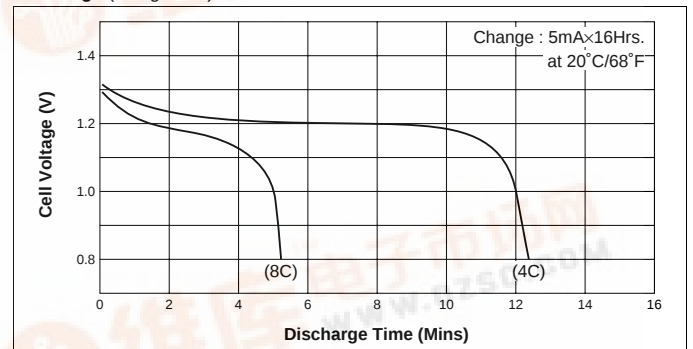

Discharge (at low rate)

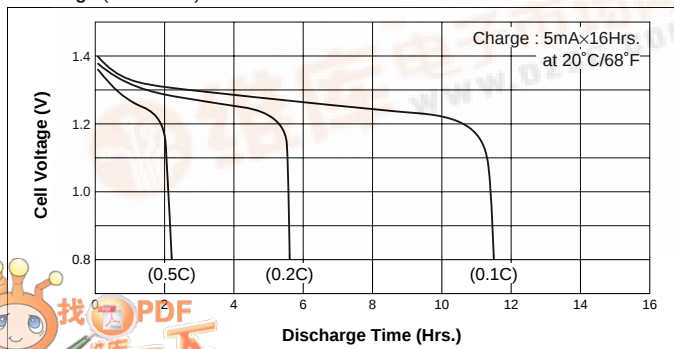

Temperature (Charge & Discharge)

