

COMMERCIAL MODELS

BK6 Cold Bonded Germanium Rectifier and Diode

Military approved parts in BOLD	Peak Inverse Voltage (PIV)	Forward Voltage Drop (V _f)	I _F	Reverse Current (I _R)	V _R	Reverse Recovery Time (T _{rr})
Type	Volts	max. V	mA	max. μ A	Volts	max. ns
AA117	90	0.18	0.1	280	90	-
AA118	90	1	5	80	90	-
AA121	25	12	1	2	4	-
AA123	18	1	4	1.5	1.8	-
AA130	15	1	4.5	220	15	-
AA143	30	0.5	15	20	20	70
AA144	100	1	5	200	75	-
AA130	30	0.45	10	15	1	350
AA132	30	0.6	30	25	1	50
AA133	12	0.42	10	10	1	12
AA142	50	0.6	50	10	1	40
AA113	8	0.6	10	3	-	-
AA115	100	0.45	10	100	1	350
AA117	75	0.45	10	300	1	350
AA118	40	0.75	200	40	1	-
OA47	25	0.45	10	100	-	70
OA90	30	1.5	10	1000	30	-
OA180	20	0.75	100	20	1	70
1N34A	60	1.0	5	30	30	-
1N55B	180	1.0	5	500	150	-
1N60	50	1.0	5	40	20	-
1N87	22.5	0.3	0.1	30	1.5	-
1N98A	80	1.0	40	100	50	-
1N100A	80	1.0	40	50	50	-
1N270	100	1.0	200	100	50	-
1N276	100	1.0	40	100	50	300
1N277	125	1.0	100	250	50	-
1N278	60	1.0	20	125. @ TA=75°C	50	-
1N527	10	0.3	1	50	10	-
1N695	20	1.0	100	2	10	300. typ.
1N695A	25	0.6	10	2	10	300
1N948	50	0.36	10	10	-	-
1N995	15	0.5	10	10	8	8
1N996	25	0.8	40	15	15	300
1N3466	40	1.0	200	15	30	-
1N3467	15	0.5	20	15	10	2
1N3469	35	1.0	600	15	20	-
1N366E	80	1.0	200	10	20	300
1N3773	25	0.5	15	4	3	40

REFER TO PAGE 11 FOR ELECTRICAL CURVES

Average power dissipation = 80 mW


Operating temperature = -65°C to 85°C

BK6 manufactures over 200 Germanium Devices.

For a complete list, contact your sales representative.

**JEDEC
DO-7
PACKAGE**

in
mm

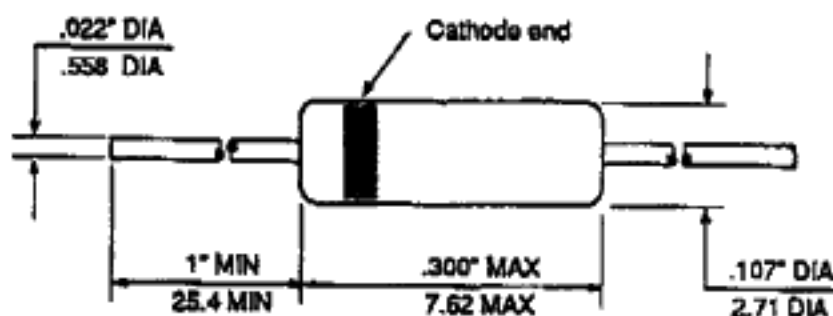

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com