

Microsemi Corp.

The diode experts

SANTA ANA, CA

For more information call:
(714) 979-8220

ALSO
AVAILABLE IN
SURFACE
MOUNT

**1N4245 thru
1N4249**

FEATURES

- MICROMINIATURE PACKAGE
- VOIDLESS HERMETICALLY SEALED GLASS PACKAGE
- TRIPLE LAYER PASSIVATION
- METALLURGICALLY BONDED
- STANDARD RECOVERY
- PIV TO 1000 VOLTS
- JAN/TX/TXV TYPES AVAILABLE PER MIL-S-19500/286

MAXIMUM RATINGS

Operating Temperature: -65°C to $+175^{\circ}\text{C}$

Storage Temperature: -65°C to $+200^{\circ}\text{C}$

Power Dissipation: (A) 3 Amp/MIL-STD-750 (See Figure 2)

(B) 1 Amp/no heat sink @ $+55^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

TYPE	PEAK INVERSE VOLTAGE (MIN.) PIV	BREAKDOWN VOLTAGE (MIN.) $B_V @ 100\mu\text{A}$	AVERAGE RECTIFIED CURRENT I_O		FORWARD VOLTAGE (MAX.) $V_F @ 3\text{A}$	REVERSE CURRENT (MAX.) $I_R @ \text{PIV}$		SURGE CURRENT (MAX.) (NOTE 1) $I_F(\text{surge})$	REVERSE RECOVERY (MAX.) (NOTE 2) t_{rr}
	VOLTS	VOLTS	AMPS		VOLTS	μA		AMPS	$\mu\text{sec.}$
			100°C	150°C		25°C	150°C		
JAN 1N4245	200	240	1.00	.333	1.3	1.0	150	25	5.0
JAN 1N4246	400	480	1.00	.333	1.3	1.0	150	25	5.0
JAN 1N4247	600	720	1.00	.333	1.3	1.0	150	25	5.0
JAN 1N4248	800	960	1.00	.333	1.3	1.0	150	25	5.0
JAN 1N4249	1000	1150	1.00	.333	1.3	1.0	150	25	5.0

NOTE 1: $T_A = 100^{\circ}\text{C}$, $f = 60\text{ Hz}$, $I_O = 1\text{A}$, 10-8 m sec. surges @ 1/minute.

NOTE 2: $I_F = 0.5\text{A}$, $I_{Rm} = 1\text{A}$, $I_{R(\text{REC})} = .250\text{A}$

MILITARY RECTIFIERS

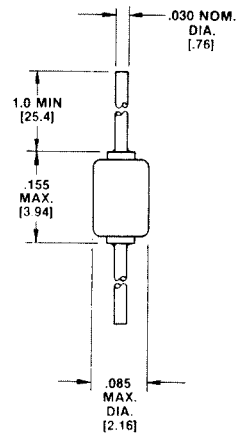


FIGURE 1
PACKAGE A

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case.

LEAD MATERIAL: Tinned copper.

MARKING: Body painted, alpha numeric.

POLARITY: Cathode band.

1N4245 thru 1N4249

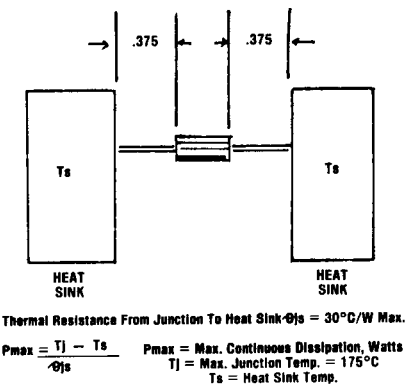


FIGURE 2
MIL STD 750 METHOD 1026(A)

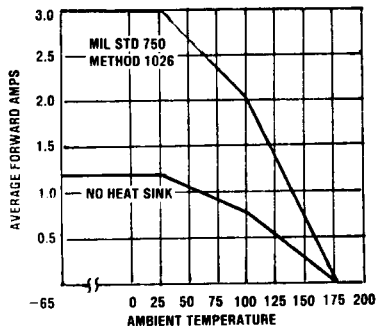


FIGURE 3
MAXIMUM FORWARD CURRENT
VS AMBIENT TEMPERATURE




FIGURE 4
TYPICAL FORWARD
CONDUCTANCE CURVE

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com