



NEC's NPN SiGe TRANSISTOR FOR LOW NOISE, HIGH -GAIN AMPLIFICATION

NESG2046M33

FEATURES

- IDEAL FOR LOW NOISE, HIGH-GAIN AMPLIFICATION APPLICATIONS:

NF = 0.8 dB TYP., $G_a = 11.5$ dB TYP. @ $V_{CE} = 1$ V, $I_c = 3$ mA, $f = 2$ GHz

- HIGH BREAKDOWN VOLTAGE TECHNOLOGY

FOR SIGE TRANSISTORS :

V_{CE0} (absolute maximum ratings) = 5.0 V

- 3-PIN SUPER LEAD-LESS MINIMOLD (M33) PACKAGE

ORDERING INFORMATION

PART NUMBER	QUANTITY	SUPPLYING FORM
NESG2046M33-A	50 pcs (Non reel)	• 8 mm wide embossed taping • Pin 2 (Base) face the perforation side of the tape
NESG2046M33-T3-A	10 kpcs/reel	

Remark To order evaluation samples, contact your nearby sales office.

The unit sample quantity is 50 pcs.

ABSOLUTE MAXIMUM RATINGS ($T_A = +25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector to Base Voltage	V_{CBO}	13	V
Collector to Emitter Voltage	V_{CEO}	5	V
Emitter to Base Voltage	V_{EBO}	1.5	V
Collector Current	I_c	40	mA
Total Power Dissipation	P_{tot} ^{Note}	130	mW
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^{\circ}\text{C}$

Note Mounted on $1.08\text{ cm}^2 \times 1.0\text{ mm}$ (t) glass epoxy PCB

Caution Observe precautions when handling because these devices are sensitive to electrostatic discharge.

ELECTRICAL CHARACTERISTICS (TA =+25°C)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
DC Characteristics						
Collector Cut-off Current	ICBO	V _{CB} = 5 V, I _E = 0 mA	–	–	100	nA
Emitter Cut-off Current	IEBO	V _{EB} = 0.5 V, I _C = 0 mA	–	–	100	nA
DC Current Gain	h _{FE} ^{Note 1}	V _{CE} = 1 V, I _C = 2 mA	140	180	220	–
RF Characteristics						
Gain Bandwidth Product	f _T	V _{CE} = 1 V, I _C = 15 mA, f = 2 GHz	15	18	–	GHz
Insertion Power Gain	S _{21e} ²	V _{CE} = 1 V, I _C = 15 mA, f = 2 GHz	11	13	–	dB
Noise Figure	NF	V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	–	0.8	1.5	dB
Associated Gain	G _a	V _{CE} = 1 V, I _C = 3 mA, f = 2 GHz, Z _S = Z _{Sopt} , Z _L = Z _{Lopt}	9.5	11.5	–	dB
Reverse Transfer Capacitance	C _{re} ^{Note 2}	V _{CB} = 1 V, I _E = 0 mA, f = 1 MHz	–	0.2	0.4	pF


- Notes 1.** Pulse measurement: PW ≤ 350 μs, Duty Cycle ≤ 2%
- 2.** Collector to base capacitance when the emitter grounded

hFE CLASSIFICATION

RANK	FB
Marking	T7
h _{FE} Value	140 to 220

PACKAGE DIMENSIONS

3-PIN SUPER LEAD-LESS MINIMOLD (M33) (UNIT: mm)

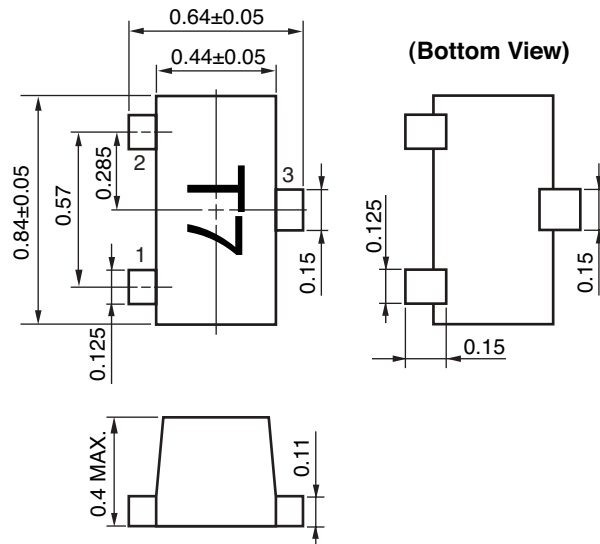

PIN CONNECTIONS

1. Emitter
2. Base
3. Collector

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

CEL California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.
4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com

DATA SUBJECT TO CHANGE WITHOUT NOTICE

09/09/2004

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com