



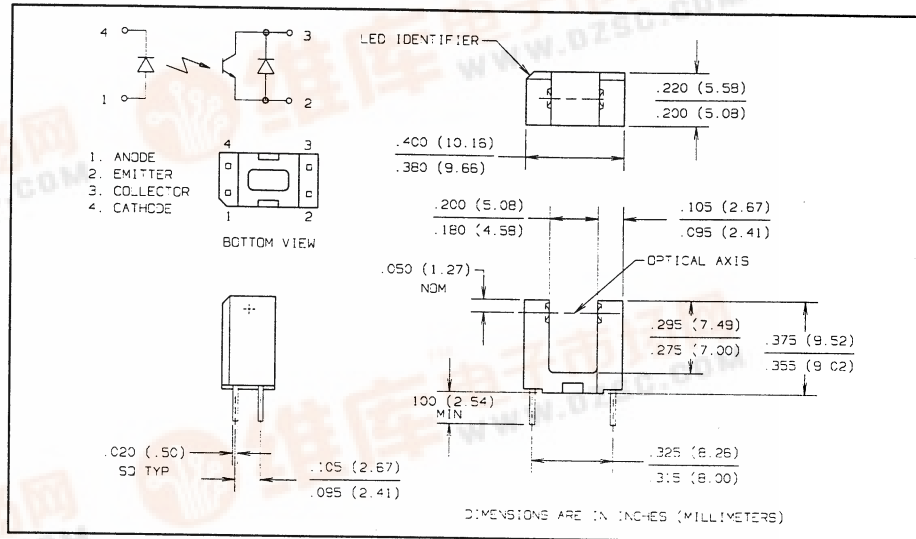

Product Bulletin OPB620  
June 1996

# Slotted Optical Switch Type OPB620

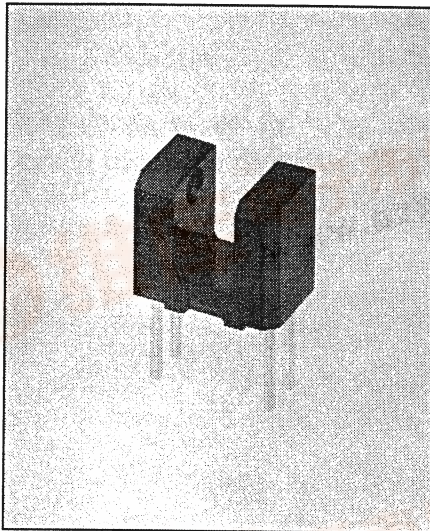



## Features

- Non-contact switching
- Printed circuit board mounting
- 0.320" (8.13 mm) Lead centers
- 0.190" (4.83 mm) Gap
- Enhanced signal to noise ratio

## Description

The OPB620 slotted optical switch consists of an infrared emitting diode and an NPN silicon phototransistor with an enhanced low current roll-off to improve contrast ratio and immunity to background irradiance.

## Typical Performance Curves

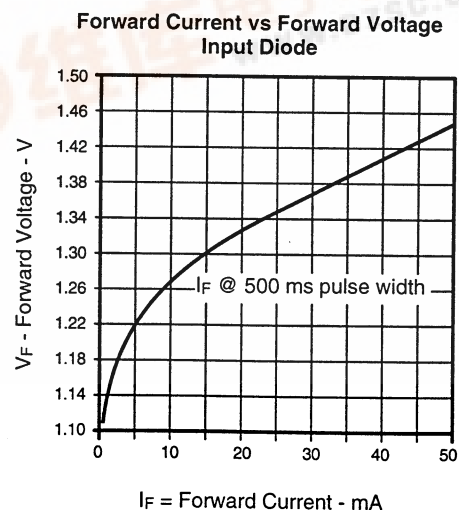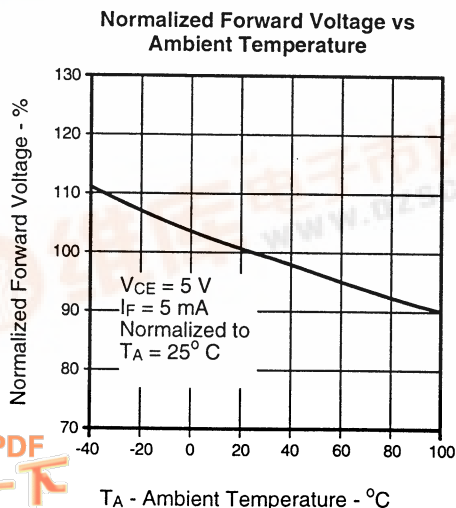

## Absolute Maximum Ratings (T<sub>A</sub> = 25° C unless otherwise noted)

Storage and Operating Temperature	-40° C to +100° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec with soldering iron]	260° C <sup>(1)</sup>
<b>Input Diode</b>	
Forward DC Current	50 mA
Peak Forward Current (1 μs pulse width, 300 pps)	3.0 A
Reverse DC Voltage	3.0 V
Power Dissipation	100 mW <sup>(2)</sup>
<b>Output Phototransistor</b>	
Collector-Emitter Voltage	30 V
Emitter Reverse Current	10 mA
Collector DC Current	30 mA
Power Dissipation	200 mW <sup>(3)</sup>

### Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering. Max. 20 grams force may be applied to leads when soldering.
- (2) Derate linearly 1.33 mW/° C above 25° C.
- (3) Derate linearly 2.0 mW/° C above 25° C.



# Types OPB620


Electrical Characteristics ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

SYMBOL	PARAMETER	MIN	MAX	UNITS	TEST CONDITIONS
<b>Input Diode</b>					
$V_F$	Forward Voltage		1.60	V	$I_F = 10\text{ mA}$
$I_R$	Reverse Current		100	$\mu\text{A}$	$V_R = 3.0\text{ V}$
<b>Output Phototransistor</b>					
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30		V	$I_C = 100\ \mu\text{A}$
$I_{ECO}$	Emitter Reverse Current		100	$\mu\text{A}$	$V_{EC} = 0.4\text{ V}$
$I_{CEO}$	Collector-Emitter Dark Current		100	nA	$V_{CE} = 5\text{ V}$
<b>Coupled</b>					
$V_{SAT}$	Saturation Voltage		0.40	V	$I_F = 5\text{ mA}, I_C = 100\ \mu\text{A}$
$I_{C(ON)}$	On-State Collector Current	1.0		mA	$I_F = 5\text{ mA}, V_{CE} = 5\text{ V}$


SLOTTED OPTICAL SWITCHES

## Typical Performance Curves


Normalized Output Current vs Forward Current

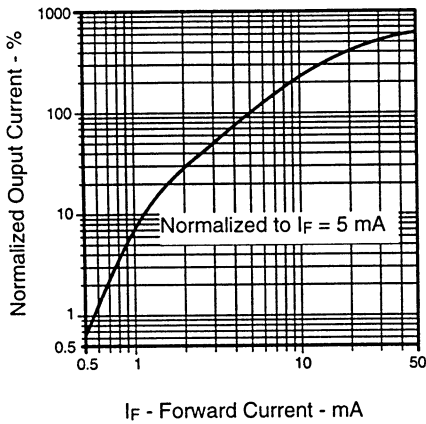


Normalized Output Current vs Ambient Temperature

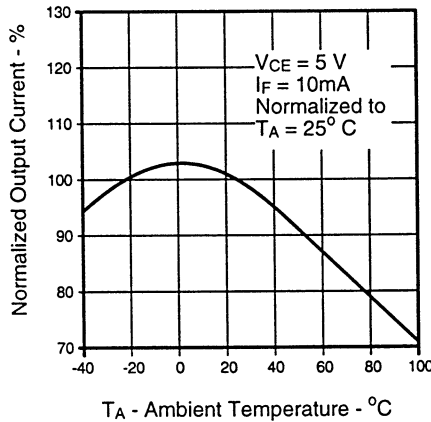


Collector Dark Current vs Ambient Temperature

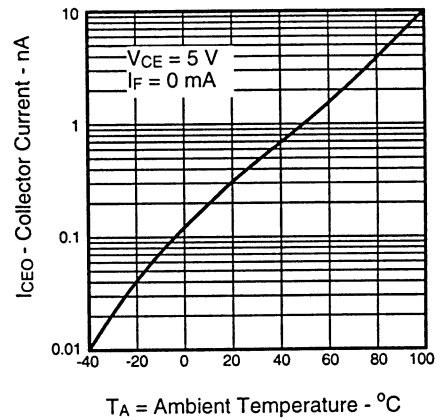

Normalized  $I_{C(ON)}$  vs Distance (X Axis Blocked)

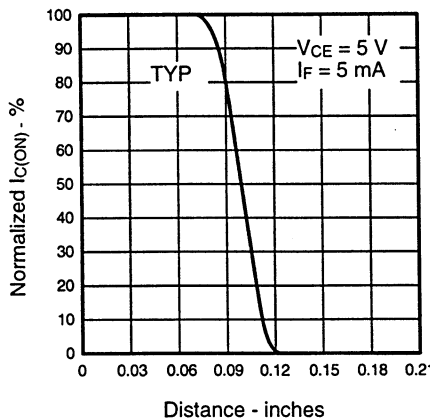

Normalized  $I_{C(ON)}$  vs Distance (Y Axis Blocked)

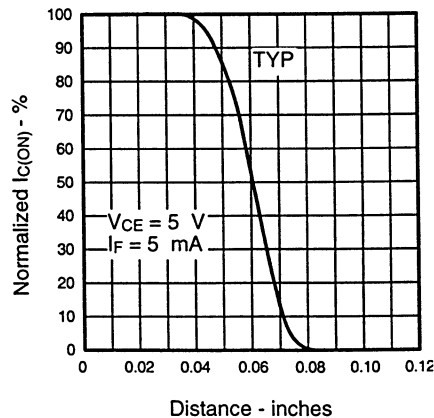

Switching Speed vs Load

