



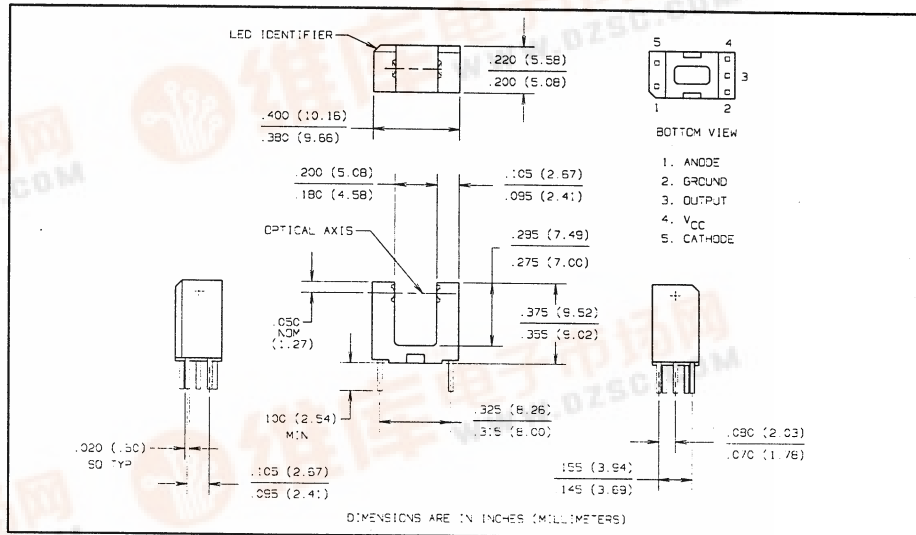

Product Bulletin OPB625
June 1996

Photologic[®] Slotted Optical Switch

Types OPB625, OPB626, OPB627, OPB628

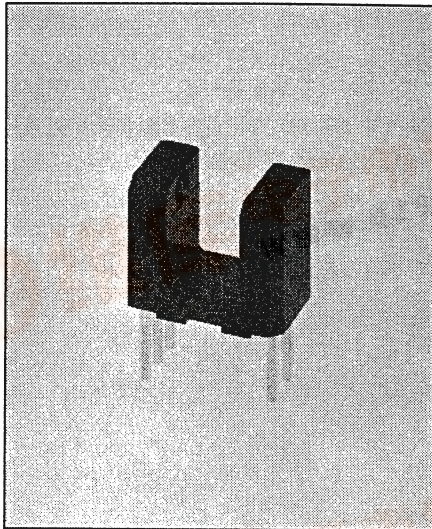

Features

- Non-contact switching
- Printed circuit board mounting
- 0.320" (8.13 mm) Lead centers
- 0.190" (4.83 mm) Gap
- Enhanced signal to noise ratio
- Four output options

Description

The OPB625 series slotted optical switches consist of an infrared emitting diode and a monolithic integrated circuit which incorporates a photodiode, a linear amplifier and a Schmitt trigger on a single silicon chip.

The device features TTL/LSTTL compatible logic level output. Open collector output versions can drive up to 10 TTL loads over a voltage range from 4.5V to 16V.

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Storage Temperature Range	-40° C to +100° C
Operating Temperature Range	-40° C to +100° C
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron]	240° C ⁽¹⁾

Input Diode

Forward DC Current	50 mA
Peak Forward Current (1μs pulse width, 300 pps)	3.0 A
Reverse DC Voltage	3.0 V
Power Dissipation	100 mW ⁽²⁾


Output Photologic[®]

Supply Voltage, V _{CC}	18 V
Duration of Output Short To V _{CC}	1.00 sec
Voltage at Output	30 V
Low Level Output Current (sinking)	16 mA
Power Dissipation	240 mW ⁽³⁾

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
- (2) Derate linearly 1.33 mW/° C above 25° C.
- (3) Derate linearly 2.50 mW/° C above 30° C.

Schematics

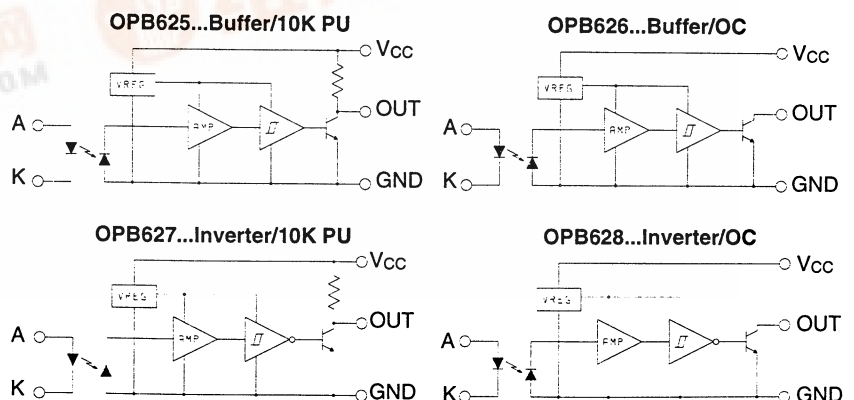

Types OPB625, OPB626, OPB627, OPB628

Electrical Characteristics ($T_A = 25^\circ \text{C}$, $V_{CC} = 4.5 \text{ V}$ to 16 V unless otherwise noted)










SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS	
Input Diode							
V_F	Forward Voltage			1.6	V	$I_F = 10 \text{ mA}$	
I_R	Reverse Current			100	μA	$V_R = 3.0 \text{ V}$	
Output Photologic[®] Sensor							
V_{CC}	Operating D.C. Supply Voltage	4.5		16.0	V		
$I_F(+)$	LED Positive-Going Threshold Current	0.1	0.6	3.0	mA		
$I_F(+)/I_F(-)$	Hysteresis Ratio	1.05	1.20	1.60			
I_{CCH}	High Level Supply Current:						
	Buffer, 10K Pull-up	OPB625		5.0	12.0	mA	$I_F = 5 \text{ mA}$, No Load On Output
	Buffer, Open-Collector	OPB626					
	Inverter, 10K Pull-up	OPB627		4.0	12.0	mA	$I_F = 0 \text{ mA}^{(4)}$, No Load On Output
I_{CCL}	Low Level Supply Current:						
	Buffer, 10K Pull-up	OPB625		5.5	12.0	mA	$I_F = 0 \text{ mA}^{(4)}$, No Load On Output
	Buffer, Open-Collector	OPB626		4.0	12.0		
	Inverter, 10K Pull-up	OPB627		6.5	12.0	mA	$I_F = 5 \text{ mA}$, No Load On Output
V_{OH}	High Level Output Voltage:						
	Buffer, 10K Pull-up	OPB625	$(V_{CC}-1.5)$			V	$I_F = 5 \text{ mA}$, $I_{OH} = 100 \mu\text{A}$
	Inverter, 10K Pull-up	OPB627	$(V_{CC}-1.5)$			V	$I_F = 0 \text{ mA}^{(4)}$, $I_{OH} = 100 \mu\text{A}$
I_{OH}	High Level Output Current:						
	Buffer, Open-Collector	OPB626			100	μA	$I_F = 5 \text{ mA}$, $V_{OH} = 30 \text{ V}$
	Inverter, Open-Collector	OPB628			100	μA	$I_F = 0 \text{ mA}^{(4)}$, $V_{OH} = 30 \text{ V}$
V_{OL}	Low Level Output Voltage:						
	Buffer, 10K Pull-up	OPB625			0.4	V	$I_F = 0 \text{ mA}^{(4)}$, $I_{OL} = 16 \text{ mA}$
	Buffer, Open-Collector	OPB626					
	Inverter, 10K Pull-up	OPB627			0.4	V	$I_F = 5 \text{ mA}$, $I_{OL} = 16 \text{ mA}$
	Inverter, Open-Collector	OPB628					
t_r, t_f	Output Rise Time, Output Fall Time			30		ns	
t_{PLH}	Propagation Delay, Low-High						$I_F = 0$ or 5 mA , $f = 10 \text{ kHz}$, DC = 50%, $R_L = 300 \Omega$
	Buffer, 10K Pull-up	OPB625		0.6		μs	
	Buffer, Open-Collector	OPB626					
	Inverter, 10K Pull-up	OPB627		3.0		μs	
	Inverter, Open-Collector	OPB628					
t_{PHL}	Propagation Delay, High-Low						
	Buffer, 10K Pull-up	OPB625		3.0		μs	
	Buffer, Open-Collector	OPB626					
	Inverter, 10K Pull-up	OPB627		0.6		μs	
	Inverter, Open-Collector	OPB628					
Data Rate	Data Rate		100		KHz	$I_F = 0$ or 5 mA , DC = 50%, $R_L = 300 \Omega$	

(4) Normal application would be with light source blocked, simulated by $I_F = 0 \text{ mA}$.

Types OPB625, OPB626, OPB627, OPB628




Typical Performance Curves

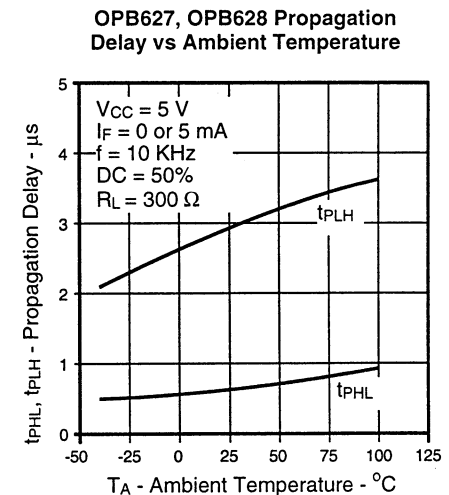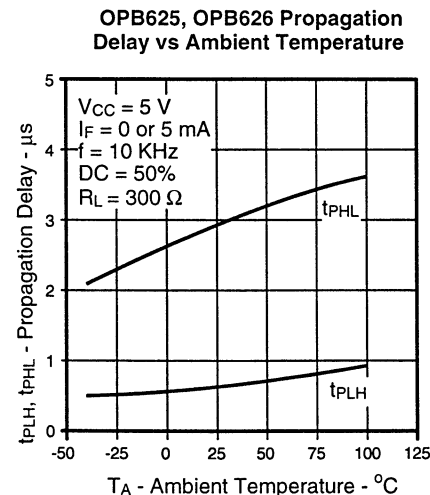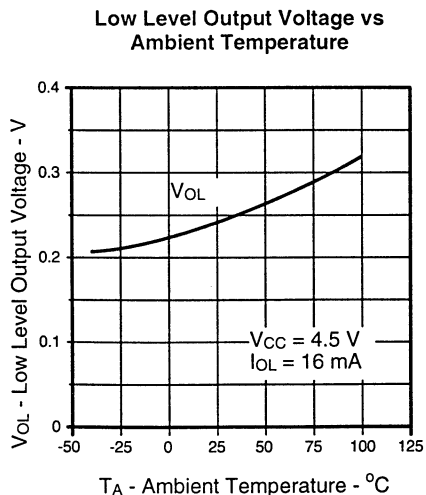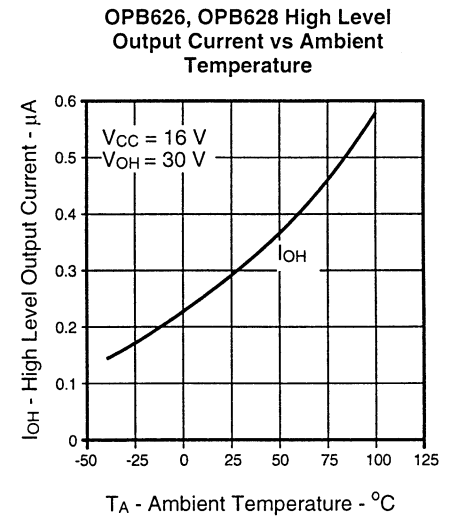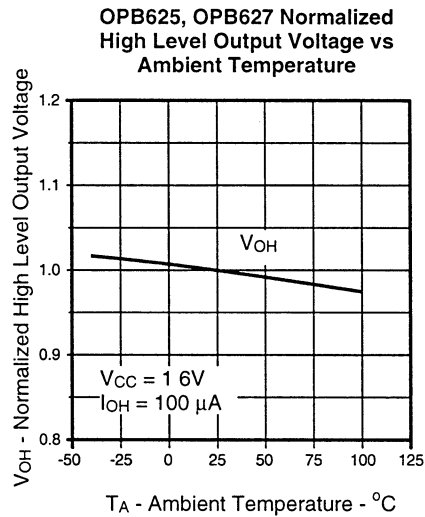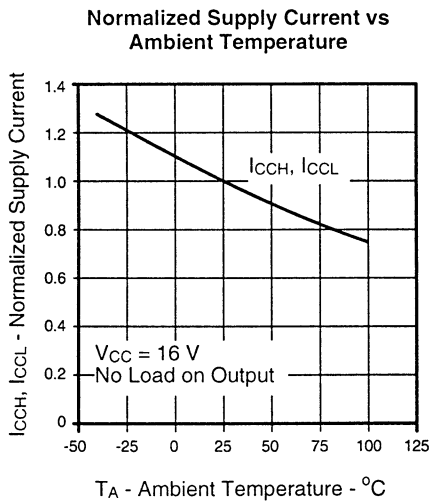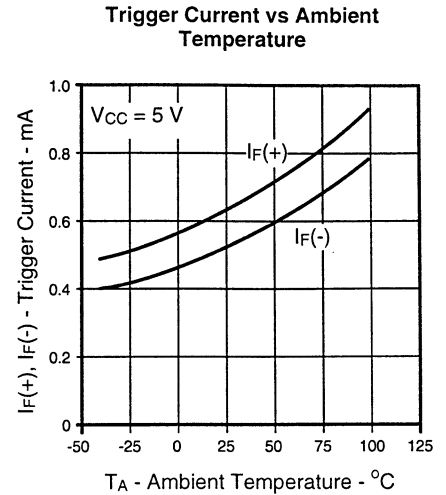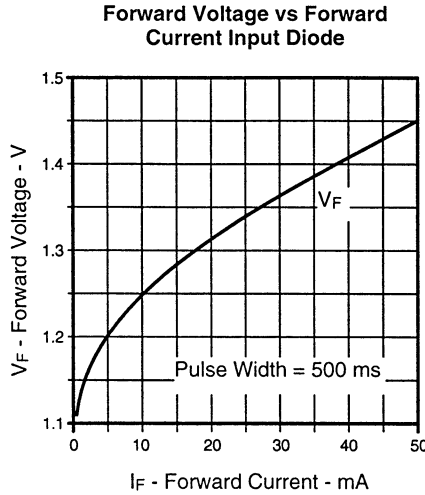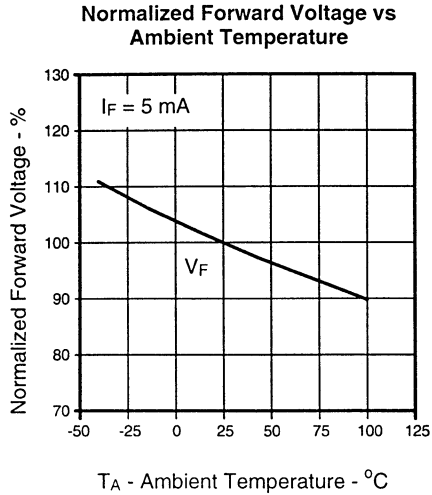


Types OPB625, OPB626, OPB627, OPB628

Typical Performance Curves


Rise Time and Fall Time vs Ambient Temperature

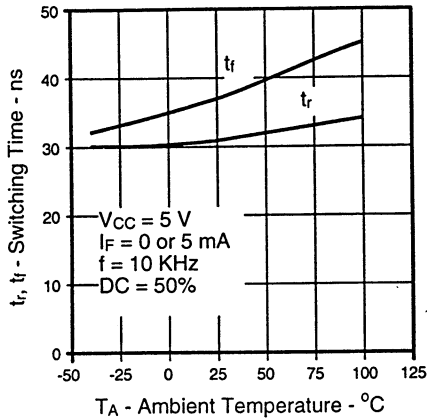


Rise Time vs Output Load vs Ambient Temperature

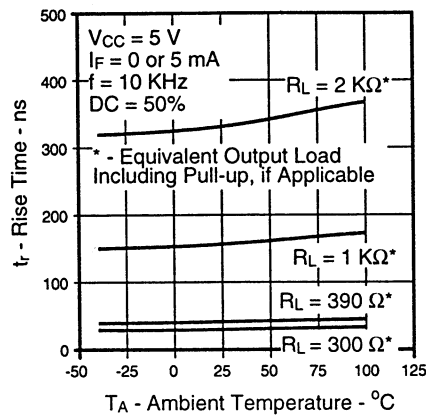

Maximum Data Rate vs Ambient Temperature

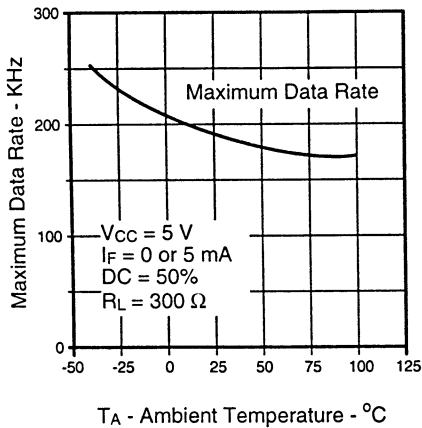

Typical Thermal Derating Curve

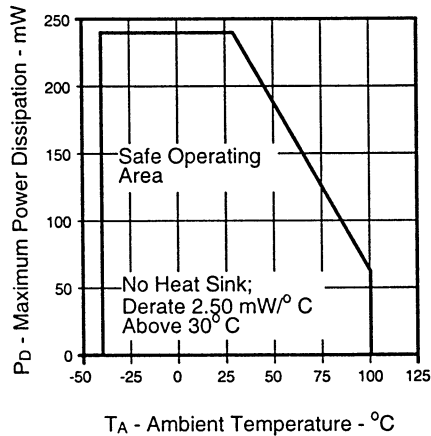

SLOTTED
OPTICAL
SWITCHES