


P 14

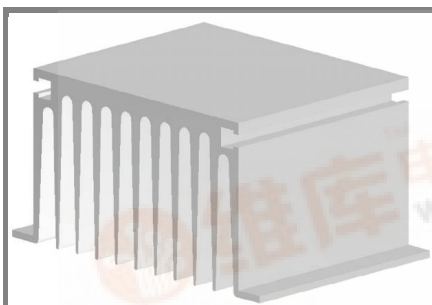

Heatsink


Standard lengths	n	b / d Ø mm	R _{thha} natural cooling K/W	R _{thha} V _{air} = 4 m/s K/W	w kg
P 14/120	1		0,84 (60W)	0,34	1,15
			0,79 (80W)		
	2		0,78 (60W)	0,112	
			0,73 (80W)		
	3		0,75 (60W)	0,1	
P 14/180			0,71 (80W)		1,75
	2		0,60 (100W)	0,085	
	3		0,58 (100W)	0,081	

For isolated power modules




P 14

Features

- Intended for power modules: the SEMIPACK and SEMITRANS ranges, and also for SEMIPONT bridge rectifier range
- Best suited for forced air cooling
- Available in various lengths

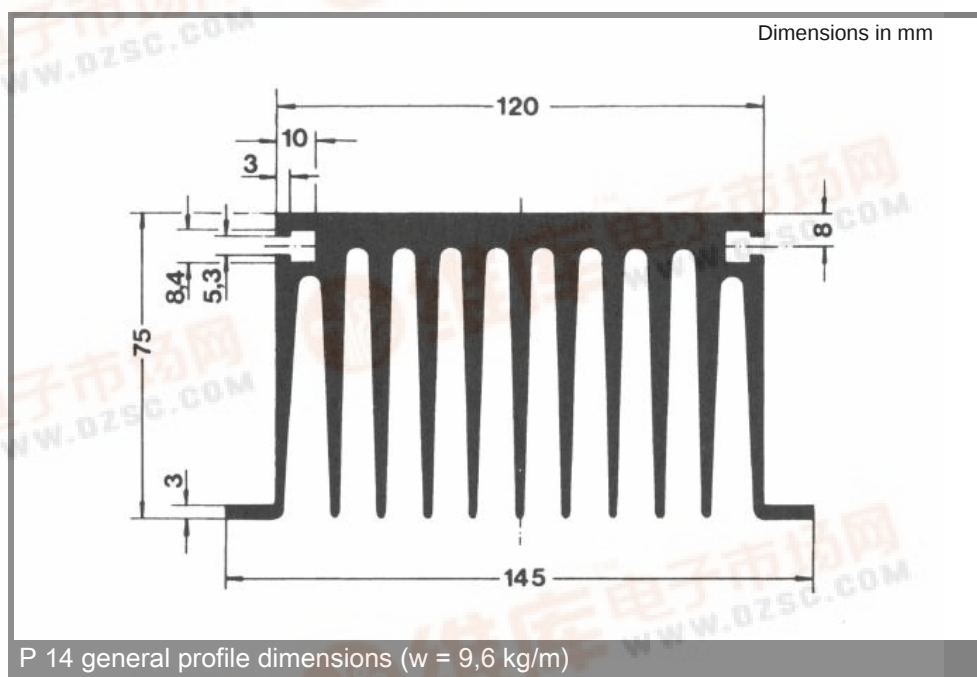

P 14

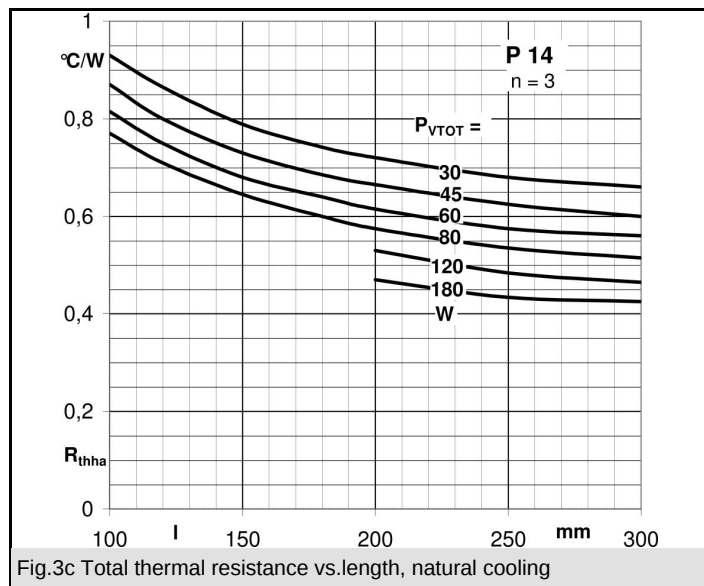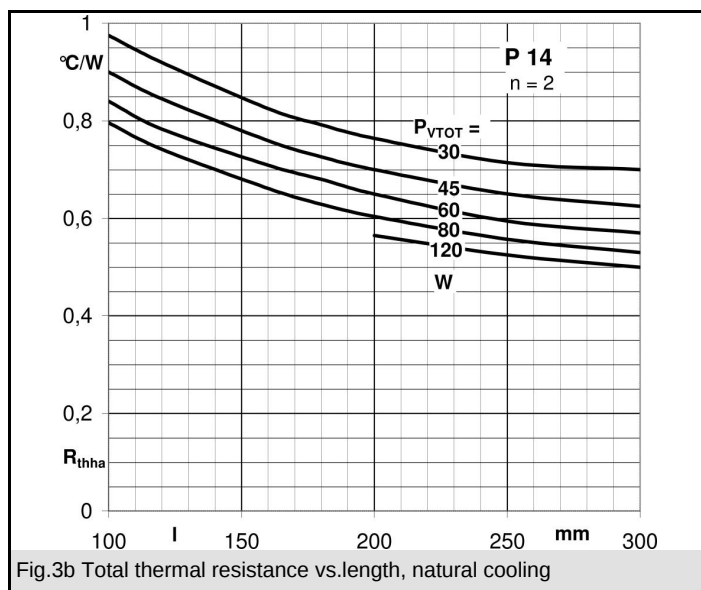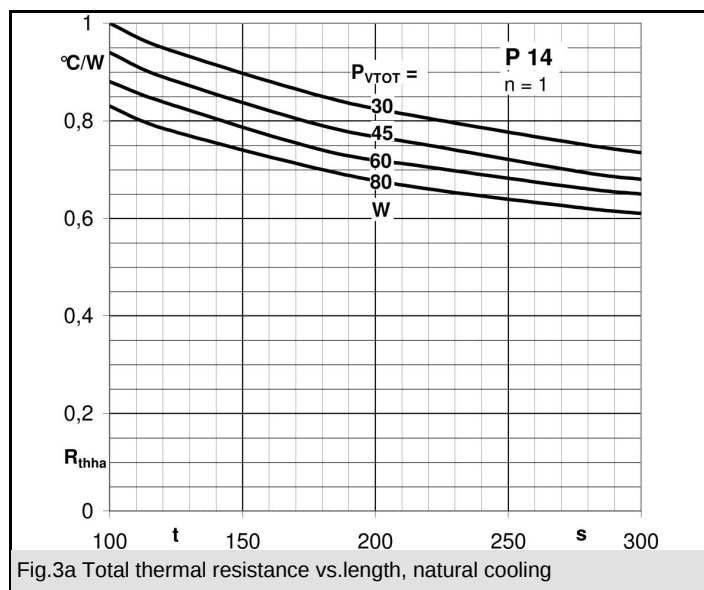

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com