

Capacitor Type

PP

POLYPROPYLENE-FOIL
SELF CASED · AXIAL
LEADS

®
MICROMATIC

TOLERANCE:

Available in $\pm 1, 2, 2.5, 5, 10\%$

CONSTRUCTION:

Non-inductively constructed with polypropylene dielectric and tin-lead foil. Extended dielectric.

CASE:

Self cased using heat shrinkable polypropylene.

OPERATING TEMPERATURE RANGE:

-55°C to $+105^{\circ}\text{C}$.

DISSIPATION FACTOR:

.1% Max. @ 1KHz
.2% Max. Cap. $\geq .047\mu\text{F}$

DIELECTRIC ABSORPTION:

.1%

INSULATION RESISTANCE:

$>50\text{K M}\Omega \times \mu\text{F}$,
need not exceed $100\text{K M}\Omega$

WIRE LEADS:

#22 AWG (.025").

MARKING:

ITW®, capacitance in PF code, tolerance, voltage, P.

REEL PACKAGING:

Available for automatic insertion.

VALUE		DIMENSIONS		VOLTAGE	TYPE
PF CODE	μF	D	L	VDC	PP
102	.001	.170	.481	600	481
152	.0015	.180	.481	400	481
222	.0022	.195	.481	400	481
472	.0047	.175	.460	250	460
103	.01	.225	.460	250	460
153	.015	.245	.460	250	460
223	.022	.275	.460	250	460
273	.027	.260	.580	250	580
333	.033	.280	.580	250	580
473	.047	.320	.580	250	580


D $\pm .03"$



1.0" Min.
L $\pm .05"$

"The $\pm 1\%$ Solution"

**CAPACITANCE CHANGE VS TEMPERATURE
POLYPROPYLENE MICROMATIC®**

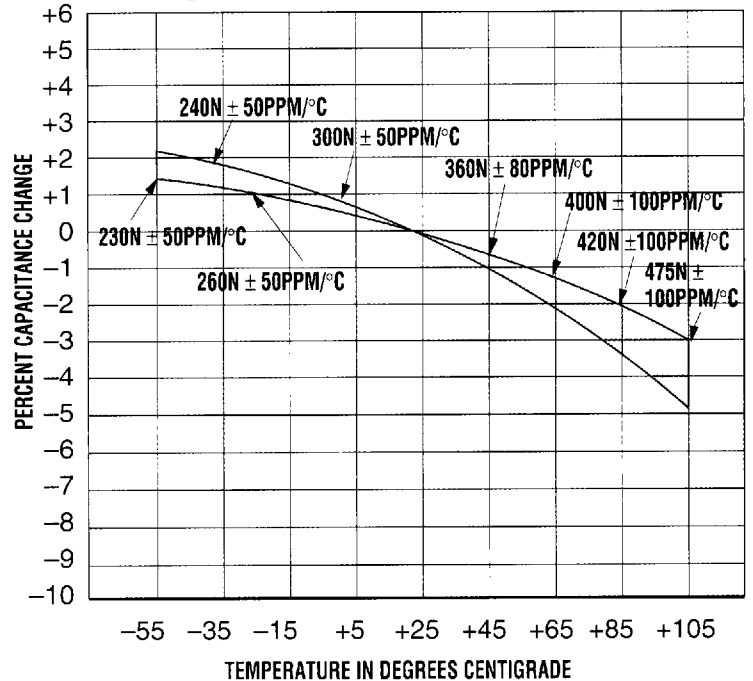

EXAMPLE: .01 $\mu\text{F} \pm 1\%$ 250 VDC =

PF CODE	TOLERANCE	VOLTAGE	TYPE	CASE CODE	REEL PACK
103	F = $\pm 1\%$	25 = 250 VDC	PP	460	Add R to
	G = $\pm 2\%$	04 = 400 VDC		481	part number
	H = $\pm 2.5\%$	06 = 600 VDC		580	when required
	J = $\pm 5\%$				
	K = $\pm 10\%$				

HOW TO ORDER

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com