


PBP-SERIES

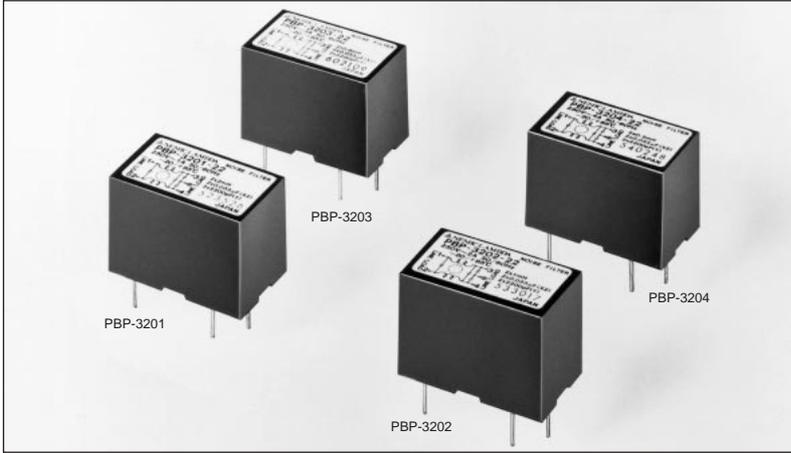

Features

- (1) For equipment designed to conform EMI regulations such as VCCI, CISPR, FCC, VDE, etc.
- (2) Attenuates conductive emission from power supply
- (3) Leakage Current: 0.75mA max. (250V, 60Hz)
- (4) Compact size
- (5) Low price

Safety standard


- UL1283,
- CSA Std. C22. 2 No. 8

Specifications




Item	Model	PBP-3201-22	PBP-3202-22	PBP-3203-22	PBP-3204-22
1	Rated voltage (AC, DC)	250V			
2	Rated current (AC, DC) (Note)	1A	2A	3A	4A
3	Test voltage (terminal to case, AC 1 minute)	1500V			
4	Isolation resistance (terminal to case, 500VDC)	100MΩ min			
5	Leakage current	125V, 60Hz		0.35mA max.	
		250V, 60Hz		0.75mA max.	
6	DC resistance	0.5Ω max.	0.2Ω max.	0.1Ω max.	0.06Ω max.
7	Temperature rise	30°C max.			
8	Operating temperature range	-20 ~ +85°C			
9	Weight (typ)	15g			

(Note) : Value at Ta ≤ 55°C. Refer to the derating curve shown below at Ta > 55°C.


Circuit

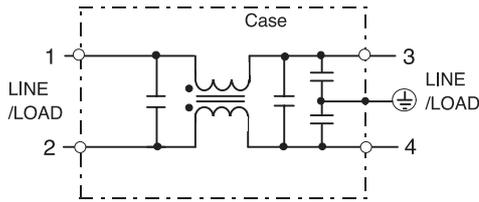

Outline drawing

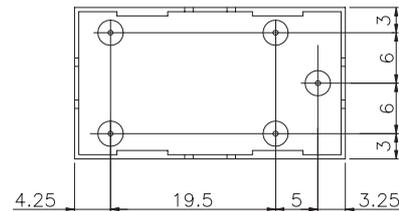

Derating

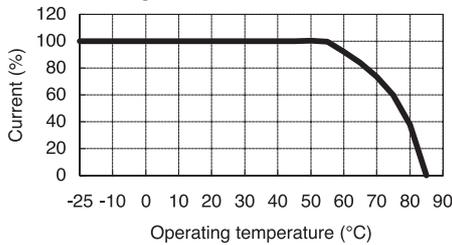

- Request customer specification for further details of specifications, outline, characteristics, etc. Read the instruction manual before usage.
- Contact us about delivery before ordering.

Case: Plastic(UL94V-0)

Unit: mm

