



# PBPC801 - PBPC807


## 8.0A BRIDGE RECTIFIER

### Features

- Diffused Junction
- High Current Capability
- Surge Overload Rating to 125A Peak
- High Case Dielectric Strength of 1500V
- Ideal for Printed Circuit Board Application
- Plastic Material - UL Flammability Classification 94V-0
- UL Listed Under Recognized Component Index, File Number E94661

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Marked on Body
- Mounting: Through Hole for #6 Screw
- Mounting Torque: 5.0 Inch-pounds Maximum
- Weight: 5.4 grams (approx)
- Mounting Position: Any
- Marking: Type Number

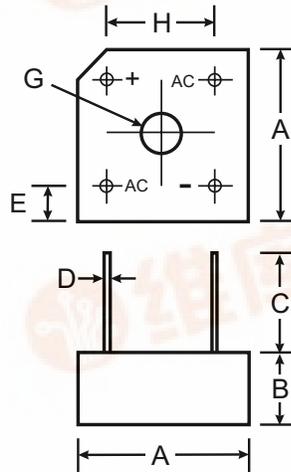

PBPC-8		
Dim	Min	Max
A	18.54	19.56
B	6.35	7.60
C	22.20	—
D	1.27 $\varnothing$ Typical	
E	5.33	7.37
G	3.60 $\varnothing$	4.00 $\varnothing$
H	12.70 Typical	
J	2.38 X 45° Typical	
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	PBPC 801	PBPC 802	PBPC 803	PBPC 804	PBPC 805	PBPC 806	PBPC 807	Unit	
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V	
Working Peak Reverse Voltage	V <sub>RWM</sub>									
DC Blocking Voltage	V <sub>R</sub>									
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	140	280	420	560	700	V	
Average Rectified Output Current (Note 1) @ T <sub>C</sub> = 50°C (Note 2) @ T <sub>C</sub> = 50°C	I <sub>o</sub>					8.0 6.0				A
Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>					125				A
Forward Voltage (per element) @ I <sub>F</sub> = 4.0A	V <sub>FM</sub>					1.1				V
Peak Reverse Current @ T <sub>C</sub> = 25°C at Rated DC Blocking Voltage (per element) @ T <sub>C</sub> = 100°C	I <sub>R</sub>					10 1.0				$\mu$ A mA
I <sup>2</sup> t Rating for Fusing (t < 8.3ms) (Note 3)	I <sup>2</sup> t					64				A <sup>2</sup> s
Typical Junction Capacitance (Note 4)	C <sub>j</sub>					100				pF
Typical Thermal Resistance Junction to Case (per element)	R <sub><math>\theta</math>JC</sub>					9.4				K/W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>					-65 to +125			°C	

- Notes:
1. Mounted on metal chassis.
  2. Mounted on PC board FR-4 material.
  3. Non-repetitive, for t > 1.0ms and < 8.3ms.
  4. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.



