


Socket 370 based Pentium® III / Celeron® Processor

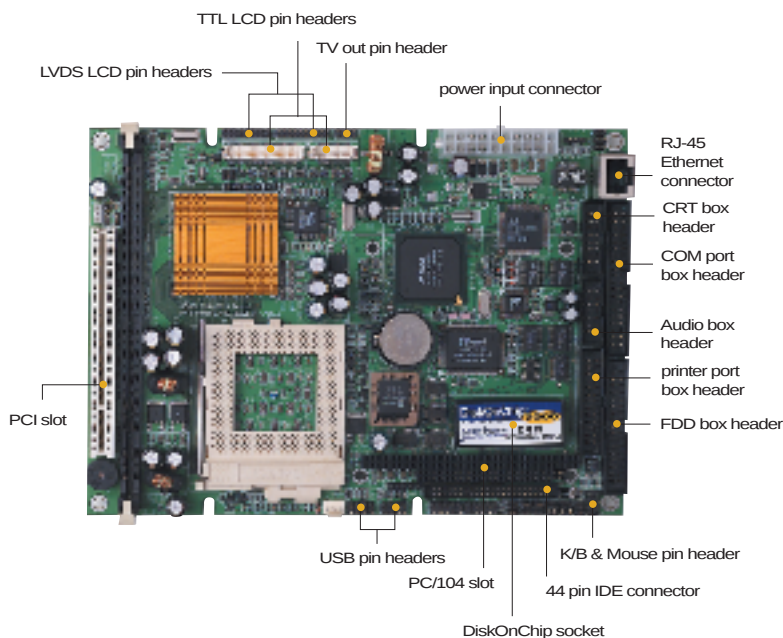

Features

- Supports Intel® Pentium® III / Celeron® processor up to 1.4GHz
- 36-bit Dual channel TTL/LVDS interface
- TV-Out Function
- 10/100Mbps Fast Ethernet
- Four USB ports

Specifications

System

- **CPU** Socket 370 based Pentium® III(.13 μ) / Celeron (.18 μ)
Processor up to 1.4GHz with FSB
66/100/133MHz
- **System Memory** 168-pin DIMM x 1, Max. 512MB (PC-100/133)
- **Chipset** VIA VT8606 + VT82C686B
- **I/O Chipset** VIA 82686B + Winbond W83977TF
- **BIOS** Award 256KB FLASH ROM
- **Ethernet** Realtek 8139DL, RJ-45 10/100Base-T connector x 1
- **SSD** Type II CompactFlash slot
Generate a system reset
- **Watchdog timer**
- **Expansion Interface** PC/104 socket x 1, PCI slot x 1
- **Battery** Lithium battery
- **H/W status monitoring** Supports power supply voltages and temperatures monitoring
- **Power supply voltage** +5V, +12V. ATX / AT
- **Board Size** 8" (L) x 5.75" (W) (203mm x 146mm)
- **Gross Weight** 1.2lb. (0.5kg)
- **Operating temperature** 32 ~ 140 (0 ~ 60)

I/O

- **MIO** IDE (Ultra DMA33) x 1, FDD x 1, K/B+Mouse x 1,
RS-232/422/485 x 1, RS-232 x 3, Parallel x 1
- **IrDA** One IrDA Tx/Rx header
- **Audio** Realtek ALC201 AC-97 2.2 CODEC
- **USB** Two 4x2 pin headers support 4 USB 1.1 ports

Display

- **Chip** VIA VT8606
- **Memory Size** Shared memory up to 32MB
- **Resolution** up to 1280 x 1024@ 32bpp colors for CRT
up to 1024 x 768@ 18bpp colors for LCD
- **LCD Interface** up to 36-bit TTL/LVDS TFT/DSTN LCD
- **TV-out** Support NTSC and PAL standard
- **Supports CRT and LCD / CRT and TV simultaneous display**

Packing List

- **Jumper Cap** 9657666600
- **Short Copper and support** 9657000300
- **Quick Installation Guide**
- **Utility CD**

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com