


Metered PDU / Power Distribution Unit

Safe, reliable power distribution with digital current meter

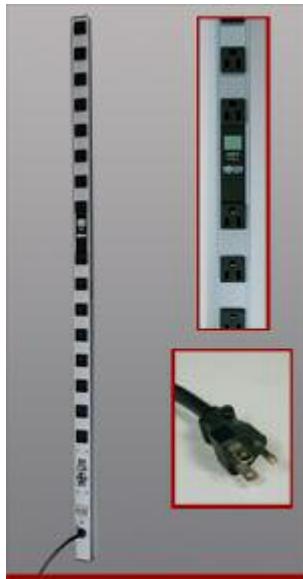

Model #: PDUMV15

- ▶ Digital current meter display
- ▶ 16 outlets
- ▶ Convenient and safe covered on/off switch
- ▶ 15 amp breaker
- ▶ 15-ft. cord
- ▶ 48" length

DESCRIPTION

Tripp Lite's PDUMV15 metered power distribution unit offers 15 amp, 120V multi-outlet AC power distribution in a convenient 48-inch mountable housing. Digital current meter displays the power consumption of connected equipment. Offers vertical power distribution in rackmount, raceway, and workbench applications. Includes 16 NEMA 5-15R output receptacles, 15 ft. AC line cord, and lighted power switch with locking transparent cover to prevent accidental shutoff. Sturdy all-metal extruded aluminum housing stands up to demanding network, laboratory, or factory environments. Unfiltered electrical pass-through makes the PDUMV15 ideal for distributing alternate waveform UPS or generator power in rack enclosures, network closets and more. Included 16 NEMA5-15R outlets, 15-ft. AC power cord with 5-15P plug, 15 amp circuit breaker in rugged metal case design.

PLUG / OUTLETS-Input: NEMA 5-15P / Output: 16 NEMA 5-15R

ELECTRICAL - 120V AC, 50/60Hz, 15A

FORMAT - 48 inch mountable strip format

KEY BUYING POINTS

- Digital current monitoring display
- Sturdy all-metal 48-inch corded PDU
- Includes hardware for Zero U configuration in rack enclosures as well as horizontal mounting in raceways and more
- 16 NEMA 5-15R output receptacles
- Lighted power switch with locking transparent safety cover prevent accidental shutoff of connected devices
- 15 amp electrical capacity with circuit breaker
- 120V, 50 /60Hz electrical compatibility
- 15 ft. power cord
- Lifetime warranty

TYPICAL APPLICATIONS

- Ideal for horizontal or vertical raceway style metered power distribution in office, workbench, industrial, networking, and telecom applications.

PACKAGE INCLUDES

- PDUMV15 Metered Vertical PDU
- Mounting hardware
- 6 outlet safety covers
- Owner's manual with warranty information

COMPLETE SPECIFICATIONS

SYSTEM OVERVIEW

System overview: 48 inch vertical PDU with digital current monitoring, includes mounting clips

Voltage compatibility: 120V

Frequency compatibility: 50 / 60Hz

OUTPUT

Output volt amp capacity (VA): 15A / 1800VA

Output nominal voltage: 120V

Outlet quantity / type: 16 NEMA 5-15R

Overload protection: 15A

INPUT

Maximum input amps: 15A

Input connection type: NEMA 5-15P

Input cord length: 15 ft.

LEDS ALARMS & SWITCHES

Front panel LEDs: Digital LED current monitor display

Switches: Lighted on/off switch with integrated safety cover

PHYSICAL

Shipping weight (lbs): 4.2

Unit weight (lbs): 3.8

Unit Dimensions (HWD/in): 3 x 48 x 1.5

Shipping Dimensions (HWD/in): 51.5 x 3.5 x 2.5

Material of construction: Aluminum

Form factors supported: Vertical (0U) mounting in rack enclosures, horizontal mount in raceways and a variety of other applications

CERTIFICATIONS

Certifications: Tested to UL60950-1 (USA) and CAN/CSA C22.2 No. 60950-1-03 (Canada), RoHS Compliant

WARRANTY

Product warranty: Lifetime warranty

SPECIAL FEATURES

Appearance: Silver housing

*The policy of Tripp Lite is one of continuous improvement.
Specifications are subject to change without notice.
Therefore, your product may vary slightly from what is currently listed.*



Tripp Lite World Headquarters
1111 W. 35th Street
Chicago, IL 60609 USA

Customer Support
(773) 869-1234

© 2007 Tripp Lite. All Rights Reserved.