



FIBRE FASTENING AND ROUTING COMPONENTS

KKU Kwik Klip Type "U"

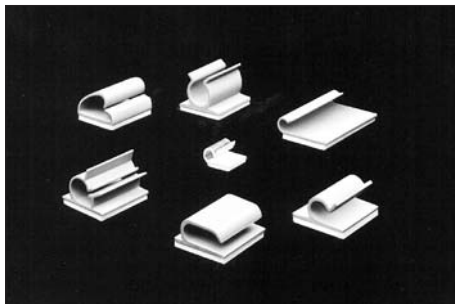

Features



- 1/4" diameter holding clip is excellent for routing the 1/4" (6.35mm) diameter Bend Limiting Tubing found on page 26

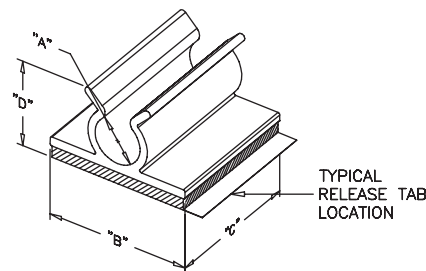

Material: PVC, RMS-04 • Adhesive Back, 1/16" (1.59mm) thick, RMS-15 • Colour: Grey					
Part No.	Holding Capacity "A"	"B" ±.015 (0.4)	"C" ±.02 (0.5)	"D" At Max Capacity Ref.	Standard Pack
KKU-2-RT	1/8 (3.2)	3/4 (19.1)	3/4 (19.1)	9/32 (7.1)	500
KKU-4-RT	1/4 (6.4)			15/32 (11.9)	
KKU-6-RT	3/8 (9.5)			19/32 (15.1)	
KKU-8-RT	1/2 (12.7)	1 (25.4)	1 (25.4)	11/16 (17.5)	100
KKU-9-RT	9/16 (14.3)			3/4 (19.1)	
KKU-12-RT	3/4 (19.1)			29/32 (23.0)	

Also available in clear PVC, RMS-32 by special order. Custom lengths available by special order.



MKKJ Micro Kwik Klip Type "J"

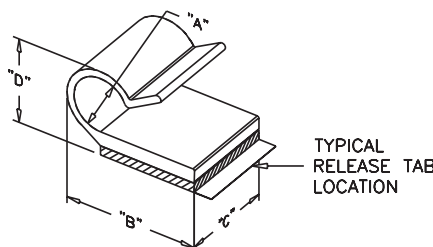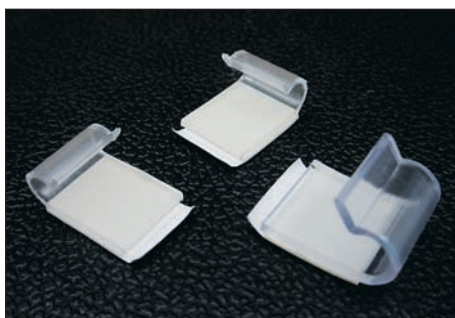

Material: Rigid PVC, RMS-32 • Adhesive Back, 1/32" (.8mm) thick, RMS-15 • Colour: Clear				
Standard Pack: 1000 per bag				
Part No.	Holding Capacity "A"	"B" ±.015 (0.4)	"C" ±.02 (0.5)	"D" At Max Capacity Ref.
MKKJ-2-RT	1/8 (3.2)	7/16 (11.1)	3/8 (9.5)	15/64 (6.0)
MKKJ-3-RT	3/16 (4.8)	5/8 (15.9)	7/16 (11.1)	21/64 (8.3)
MKKJ-4-RT	1/4 (6.4)	21/32 (16.7)	1/2 (12.7)	13/32 (10.3)
MKKJ-5-RT	5/16 (7.9)	13/16 (20.6)	9/16 (14.3)	31/64 (12.3)
MKKJ-6-RT	3/8 (9.5)	7/8 (22.2)	5/8 (15.9)	9/64 (14.3)

Custom lengths available by special order.

NGS/PGS/SNGS/SPGS Continuous Grommet Strip

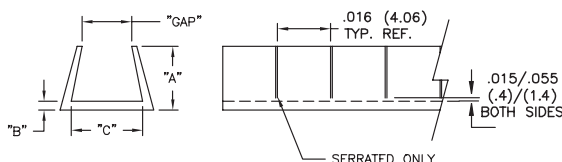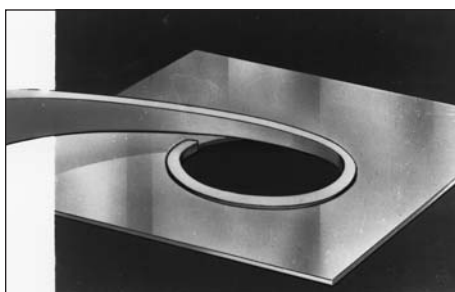

Features

- Insulates wires from chafing
- Can be used for round, square and rectangular shapes

Colour: Natural or Black; Add B for black.							
Solid Lengths		Serrated Lengths		Standard Pack: 100 ft. (3048 cm) Rolls; custom lengths available by special order			
Part No.	Part No.	"A" Ref	"B" Ref	"C" Ref	"Gap" Ref	Material	Panel Thickness Range
NGS-1	SNGS-1	.125 (3.2)	.031 (0.8)	.031 (0.8)	.018 (0.5)	Nylon (RMS-21)	UP TO .036 (0.9)
NGS-2	SNGS-2	.172 (4.4)		.109 (2.8)	.037 (0.9)		.037 (0.9) - .071 (1.8)
NGS-2.5	SNGS-2.5			.060 (1.5)	.072 (1.8) - .105 (2.7)		
NGS-3	SNGS-3		.188 (4.8)	.156 (4.0)	.106 (2.7)		.106 (2.7) - .164 (4.2)
NGS-4	SNGS-4	.188 (4.8)		.165 (4.2)	.165 (4.2) - .187 (4.7)		
NGS-5	SNGS-5	.250 (6.4)		.187 (4.7)	.188 (4.8) - .250 (6.4)		
PGS-1	SPGS-1	.125 (3.2)	.031 (0.8)	.031 (0.8)	.018 (0.5)	Polyethylen e (RMS-06)	UP TO .036 (0.9)
PGS-2	SPGS-2	.172 (4.4)		.037 (0.9)	.037 (0.9)		.037 (0.9) - .071 (1.8)
PGS-2.5	SPGS-2.5			.109 (2.8)	.060 (1.5)		.072 (1.8) - .105 (2.7)
PGS-3	SPGS-3		.188 (4.8)	.156 (4.0)	.106 (2.7)		.106 (2.7) - .164 (4.2)
PGS-4	SPGS-4	.188 (4.8)		.165 (4.2)	.165 (4.2) - .187 (4.7)		
PGS-5	SPGS-5	.250 (6.4)		.187 (4.7)	.188 (4.8) - .250 (6.4)		