




PI5C16212

## 24-Bit Bus Exchange Switch

### Product Features

- Near-Zero propagation delay
- 5-ohm switches connect inputs to outputs
- Direct bus connection when switches are ON
- Ultra-low quiescent power ( $0.1\mu A$  typical)
  - Ideally suited for notebook applications
- Industrial operating temperature:  $-40^{\circ}C$  to  $+85^{\circ}C$
- Packaging (Pb-free & Green available):
  - 56-pin 240-mil wide thin plastic TSSOP (A)
  - 56-pin 300-mil wide plastic SSOP (V)
  - 56-pin 173-mil wide plastic TFSOP (K)

### Logic Block Diagram

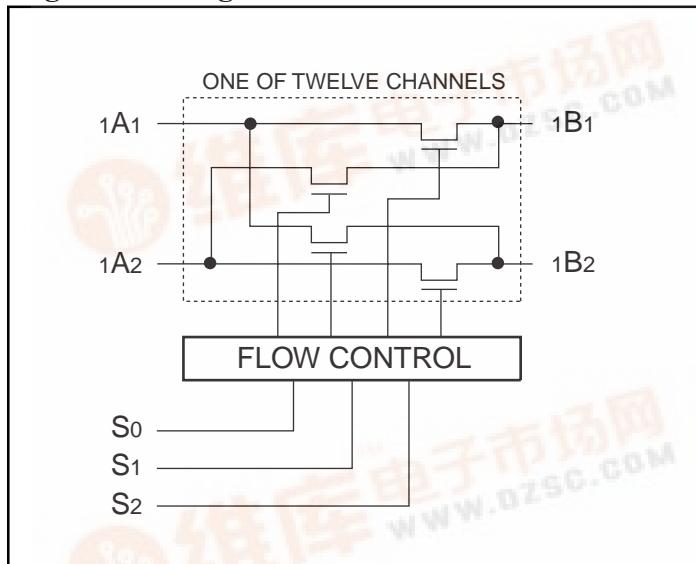

### Truth Table

Function	S2	S1	S0	A1	A2
Disconnect	L	L	L	Z	Z
A1 to B1	L	L	H	B1	Z
A1 to B2	L	H	L	B2	Z
A2 to B1	L	H	H	Z	B1
A2 to B2	H	L	L	Z	B2
Disconnect	H	L	H	Z	Z
A1 to B1, A2 to B2	H	H	L	B1	B2
A1 to B2, A2 to B1	H	H	H	B2	B1

Note:

H = High Voltage Level, L = Low Voltage Level,  
Z = High Impedance

### Product Description

Pericom Semiconductor's PI5C16212 is a 24-bit bus exchange switches designed with a low On-Resistance allowing inputs to be connected directly to outputs. This device operates as a 24-bit bus switch or a 12-bit exchanger that provides data exchanging between the four signal ports via the data select pins (S0-S2).

### Product Pin Configuration

S0	1	56	S1
1A1	2	55	S2
1A2	3	54	1B1
2A1	4	53	1B2
2A2	5	52	2B1
3A1	6	51	2B2
3A2	7	50	3B1
GND	8	49	GND
4A1	9	48	3B2
4A2	10	47	4B1
5A1	11	46	4B2
5A2	12	56-Pin	45
6A1	13	A, K, V	44
6A2	14		5B2
7A1	15		6B1
7A2	16		6B2
VCC	17		7B1
8A1	18		7B2
GND	19		8B1
8A2	20		8B2
9A1	21		9B1
9A2	22		9B2
10A1	23		10B1
10A2	24		10B2
11A1	25		11B1
11A2	26		11B2
12A1	27		12B1
12A2	28		12B2

### Product Pin Description

Pin Name	I/O	Description
S0-S2	I	Select Inputs
xAx	I/O	Bus A
xBx	I/O	Bus B



PI5C16212

24-Bit Bus-Exchange Switch

## Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....	-65°C to +150°C
Ambient Temperature with Power Applied .....	-40°C to +85°C
Supply Voltage to Ground Potential .....	-0.5V to +7.0V
DC Input Voltage .....	-0.5V to +7.0V
DC Output Current .....	120mA
Power Dissipation .....	1W

### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

## Recommended Operating Condition

Parameter	Description	Min.	Max.	Units
V <sub>CC</sub>	Supply Voltage	4	5.5	V
V <sub>IH</sub>	High-Level Input Voltage	2	—	
V <sub>IL</sub>	Low-Level Input Voltage	—	0.8	
T <sub>A</sub>	Operating Free-Air Temperature	-40	85	°C

## DC Electrical Characteristics (Over the Operating Range, T<sub>A</sub> = -40°C to +85°C, V<sub>CC</sub> = 5V ± 10%)

Parameters	Description	Test Conditions <sup>(1)</sup>	Min.	Typ <sup>(2)</sup>	Max.	Units
V <sub>IH</sub>	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0	—	—	V
V <sub>IL</sub>	Input LOW Voltage		-0.5	—	0.8	
I <sub>I</sub>	Input Current	V <sub>CC</sub> = Max., V <sub>IN</sub> = V <sub>CC</sub> or GND	—	—	±1	μA
		V <sub>CC</sub> = 0, V <sub>IN</sub> = V <sub>CC</sub>	—	—	10	
I <sub>OZH</sub>	High Impedance Output Current	0 - A, B - V <sub>CC</sub>	—	—	±1	
V <sub>IK</sub>	Clamp Diode Voltage	V <sub>CC</sub> = Min., I <sub>IN</sub> = -18mA	—	-0.7	-1.2	V
I <sub>OS</sub>	Short Circuit Current <sup>(3)</sup>	A (B) = 0V, B (A) = V <sub>CC</sub>	100	—	—	mA
V <sub>H</sub>	Input Hysteresis at Control Pins		—	150	—	mV
R <sub>ON</sub>	Switch On Resistance <sup>(4)</sup>	V <sub>CC</sub> = Min., V <sub>IN</sub> = 0.0V, I <sub>ON</sub> = 64mA	20	28	40	Ω
		V <sub>CC</sub> = Min., V <sub>IN</sub> = 2.4V, I <sub>ON</sub> = 15mA	—	—	12	
			20	35	48	

## Capacitance (T<sub>A</sub> = 25°C, f = 1 MHz)

Parameters <sup>(5)</sup>	Description	Test Conditions	Typ.	Max.	Units
C <sub>IN</sub>	Input Capacitance	V <sub>IN</sub> = 0V	3	6	pF
C <sub>OFF</sub>	A/B Capacitance, Switch Off	V <sub>IN</sub> = 0V	6	14	
C <sub>ON</sub>	A/B Capacitance, Switch On	V <sub>IN</sub> = 0V	12	30	

### Notes:

1. For Max. or Min. conditions, use appropriate value specified under Electrical Characteristics for the applicable device.
2. Typical values are at V<sub>CC</sub> = 5.0V, T<sub>A</sub> = 25°C ambient and maximum loading.
3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
4. Measured by the voltage drop between A and B pin at indicated current through the switch. On-Resistance is determined by the lower of the voltages on the two (A,B) pins.
5. This parameter is determined by device characterization but is not production tested.



**PI5C16212**  
**24-Bit Bus-Exchange Switch**

### Power Supply Characteristics

Parameters	Description	Test Conditions <sup>(1)</sup>		Min.	Typ. <sup>(2)</sup>	Max.	Units
I <sub>CC</sub>	Quiescent Power Supply Current	V <sub>CC</sub> = Max.	V <sub>IN</sub> = GND or V <sub>CC</sub>	—	0.1	3.0	μA
ΔI <sub>CC</sub> <sup>(3)</sup>	Supply Current per Input @ TTL HIGH	V <sub>CC</sub> = 5.5V	V <sub>IN</sub> = 3.4V <sup>(4)</sup>	—	—	0.2	mA
I <sub>CCD</sub>	Supply Current per Input per MHz <sup>(5)</sup> S <sub>N</sub> = GND, Control Input Toggling 50% Duty Cycle	V <sub>CC</sub> = Max., A & B Pins Open		—	—	0.25	mA/ MHz

**Notes:**

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for applicable device.
2. Typical values are at V<sub>CC</sub>=5.0V, +25°C Ambient.
3. This is the increase in supply current for each input that is at the specified TTL voltage level rather than V<sub>CC</sub> or GND.
4. Per TTL driven input (V<sub>IN</sub> = 2.7V, control inputs only); A and B pins do not contribute to I<sub>CC</sub>.
5. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

### PI5C16212 Switching Characteristics over Operating Range

Parameters	Description	Conditions <sup>(1)</sup>	PI5C16212		ns	
			Com.			
			Min.	Max.		
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay <sup>(2,3)</sup> , xAx to xBx, xBx to xAx	C <sub>L</sub> = 50pF R <sub>L</sub> = 500 ohms	—	0.25	ns	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay, S to Ax or Bx		1.5	7.5		
t <sub>PZH</sub> t <sub>PZL</sub>	Bus Enable Time, S to xAx or xBx		1.5	7.0		
t <sub>PHZ</sub> t <sub>PLZ</sub>	Bus Disable Time, S to xAx or xBx		1.5	6.5		

**Notes:**


1. See test circuit and waveforms.
2. This parameter is guaranteed but not tested on Propagation Delays.
3. The bus switch contributes no propagational delay other than the RC delay of the On-Resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25ns for 50pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.




PI5C16212

24-Bit Bus-Exchange Switch

### 56-Pin 173-Mil Wide Plastic TVSOP (K) Package

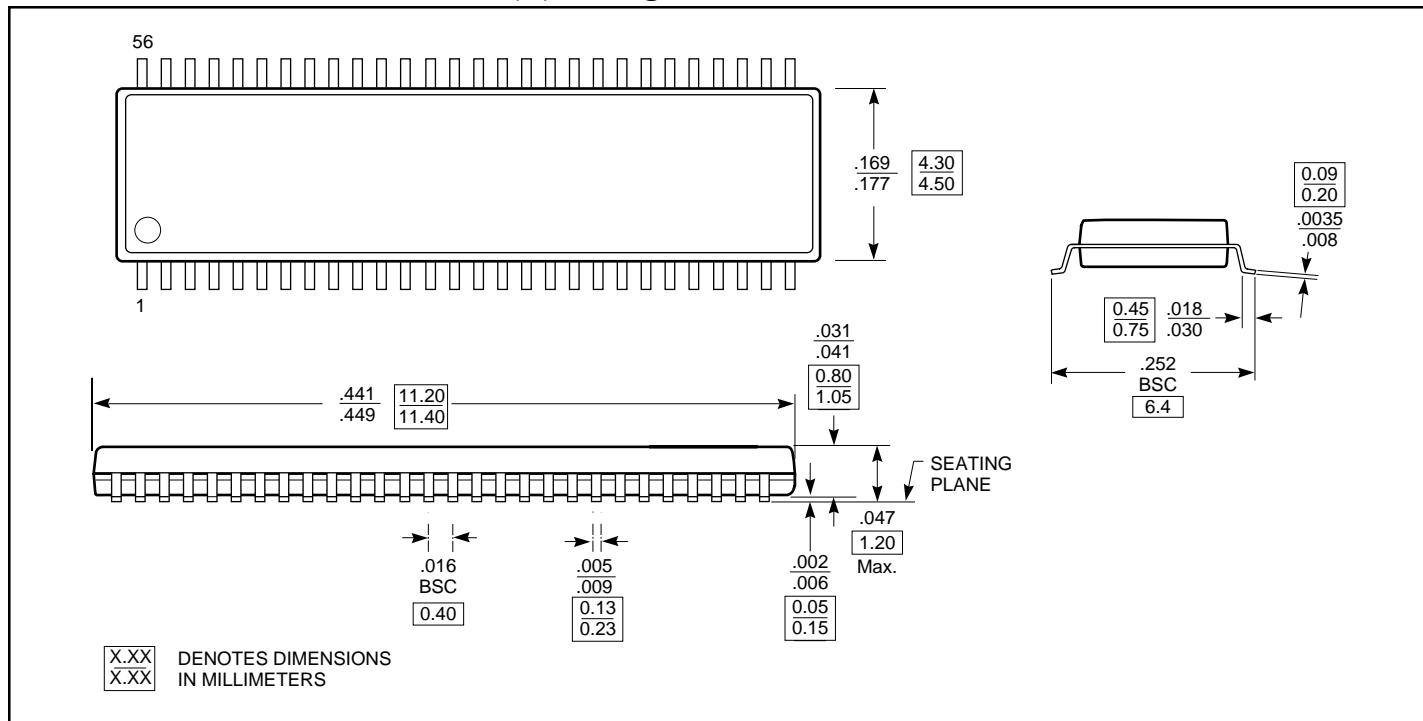


### 56-Pin 240-Mil Wide Thin Plastic TSSOP (A) Package

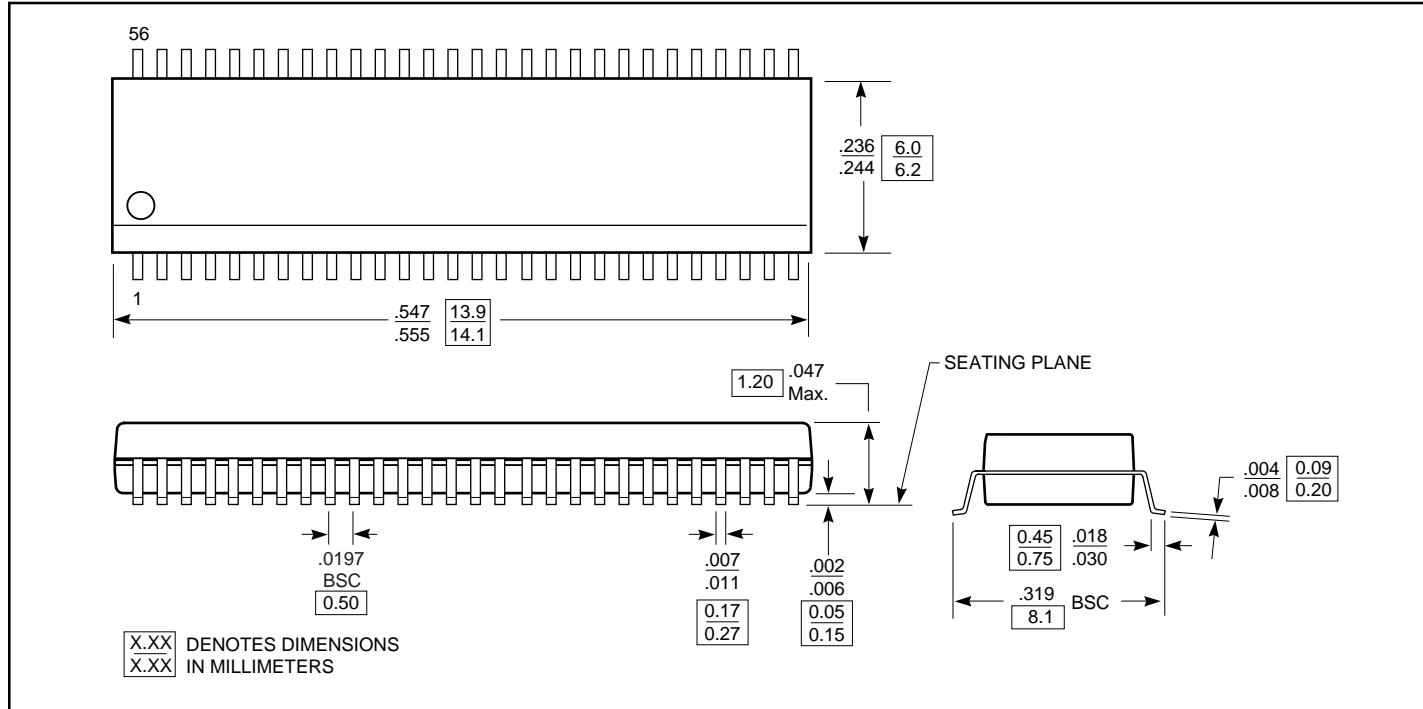



PI5C16212  
24-Bit Bus-Exchange Switch

### 56-Pin 300-Mil Wide Thin Plastic SSOP (V) Package

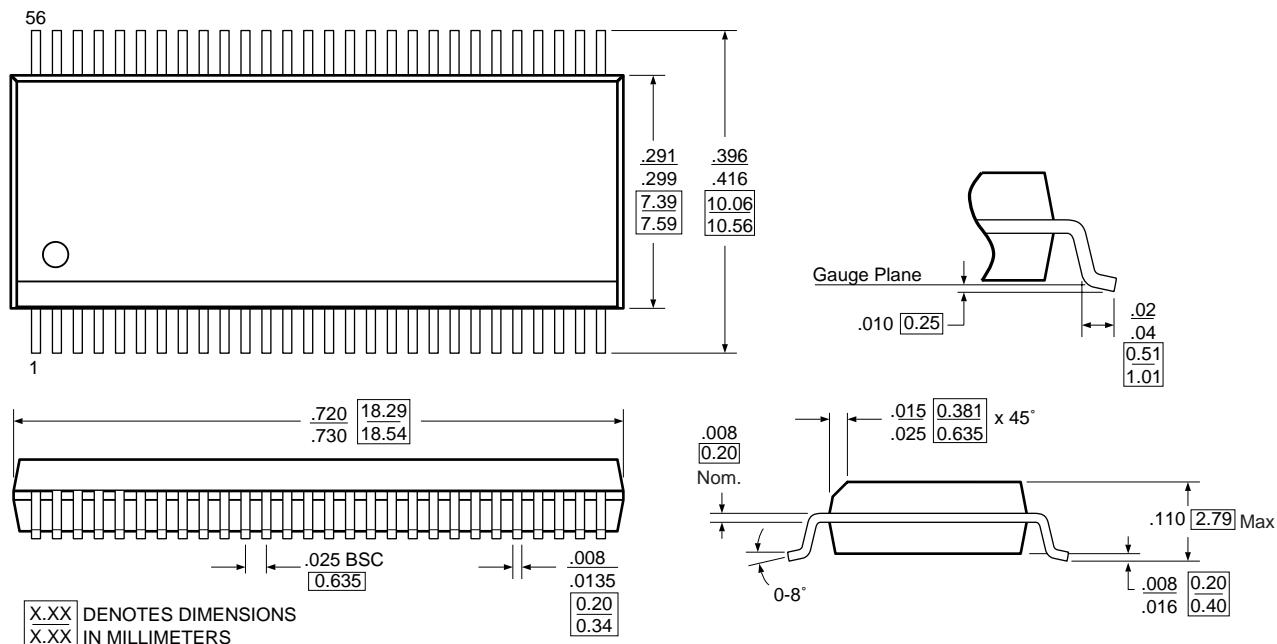

### Ordering Information

Ordering Code	Package Code	Package Description
PI5C16212K	K	56-pin TVSOP
PI5C16212KE	K	Pb-free & Green, 56-pin TVSOP
PI5C16212A	A	56-pin TSSOP
PI5C16212AE	A	Pb-free & Green, 56-pin TSSOP
PI5C16212V	V	56-pin SSOP
PI5C16212VE	V	Pb-free & Green, 56-pin SSOP

#### Notes:

- Thermal Characteristics can be found on the world wide web at: [www.pericom.com/packages/](http://www.pericom.com/packages/)