
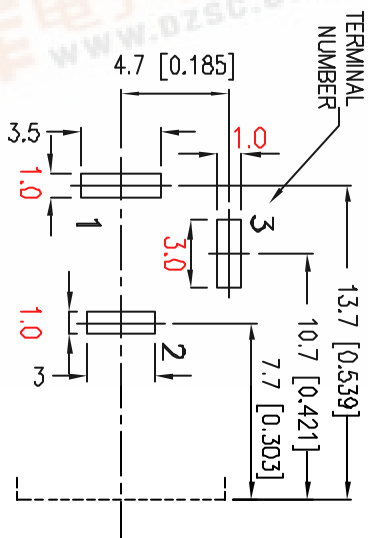
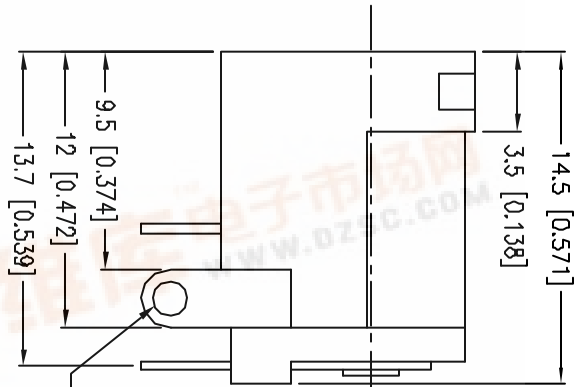


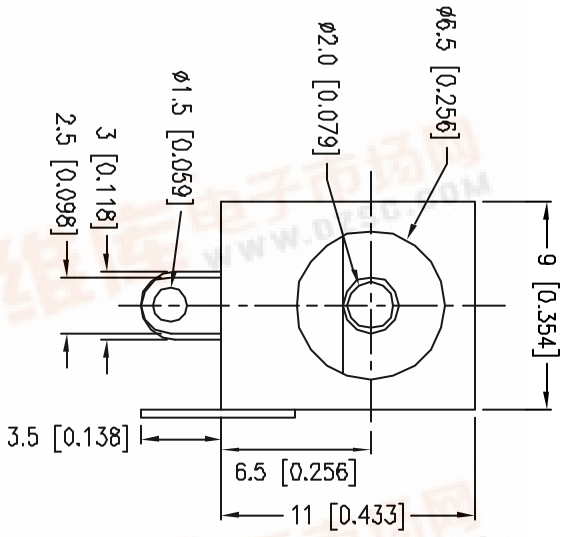

PCB LAYOUT
(TOP VIEW)

SPECIFICATIONS:

RATING: 16V DC @ 5A
CONTACT RESISTANCE:
30m OHMS MAX
INSULATION RESISTANCE:
50M OHMS MIN: 100V DC
VOLTAGE WITHSTAND:
250V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

MODEL NO.	PJ-002AH
SCHEMATIC	

CENTER PIN DIAMETER
2.0MM DIA.

Material

Center Pin: Copper, Nickel
Plated
Terminal 1: Brass, Silver
Plated
Terminal 2: Copper Alloy,
Silver Plated
Terminal 3: Brass, Silver
Plated
Housing: PBT



9615 SW Allen, Suite 103
Beverton, OR 97006
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

DC POWER JACK

PART NO.

PJ-002AH

UNITS:

MM INCHES

DRAWN BY:

APPROVED BY:

