


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

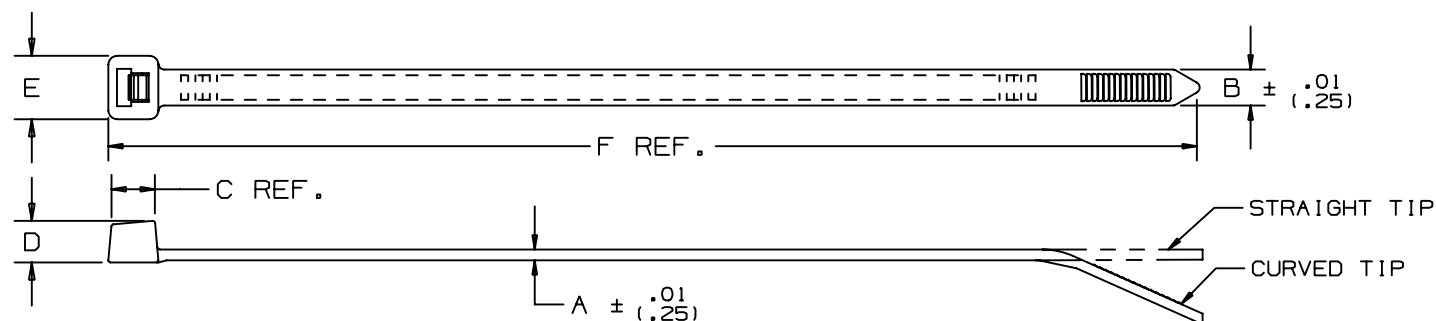

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS * * SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-60	.06 (1.5)	.87 (22.1)	.043 (1.1)	.098 (2.5)	.170 (4.3)	.154 (3.9)	.188 (4.8)	4.0 (102)	18 (80)	M	CURVED	.07 (32)
PLT2S-60	.06 (1.5)	1.88 (47.8)	.052 (1.3)	.190 (4.8)	.258 (6.6)	.220 (5.6)	.320 (8.1)	7.4 (188)	50 (222)	S	CURVED	.29 (132)

NOTES:

- * 1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
 ** 2) CABLE TIE CROSS-SECTION CODE: M=MINIATURE, I=INTERMEDIATE, S=STANDARD & H=HEAVY.
 3) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 248°F (120°C).
 4) MATERIAL FLAMMABILITY RATING: UL94V-0.
 5) MINIMUM LOOP TENSILE RATING AT 120°F (49°C)/20% RH.
 6) COLOR: BLACK

SS_26944_01.PRT

CAD FILENAME/LAYERS

CAD FILENAME/LAYERS

DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

PAN-TY CABLE TIES
BLACK FLAME RETARDANT
-60 SERIES

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± ---- (.XXX) ± .020(.51)
(.XX) ± .02(.5) ANGLES ± ----

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
LFT

MAT'L:

MAT'L: BLACK
FLAME RETARDANT
NYLON 6.6

SCALE	NONE
-------	------

DRAWING NO.
SS-26944

DWG
A
SIZE

--	-----	---		CORRECTED MATERIAL NAME	-----	--			
3	4/20/05	ERW		REMOVED PLT2M AND PLT4S - OBSOLETE MOLDS	26944	3			
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP		