




[Accessories](#) > [Batteries, Chargers & Adapters](#) >

PM8907 Line Voltage Adapter/Battery Charger

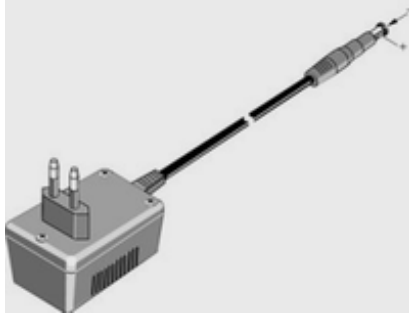

Provides power cord operation and charging for ScopeMeter 90 and 120 series

- Mains (line voltage):
 - /801 (Europe) 230 V $\pm$ 10%
 - /803 (North America) 120 V $\pm$ 100%
 - /804 (United Kingdom) 240 V $\pm$ 10%
 - /806 (Japan) 100 V $\pm$ 10%
 - /807 (Australia) 240 V $\pm$ 10%
 - /808 (Universal) 115 V $\pm$ 15% or 230 V $\pm$ 15%
- /808 is equipped with a male receptacle plug that must be connected to a line cord appropriate for local use. (Line cord not included)
The North American line plug included
- Frequency (all versions): 50 to 60 Hz $\pm$ 10%
- Output Voltage: 15 V
- Output Current: 300 mA max.
- Output Plug: 5 mm power jack per DIN 45323
- Power Consumption: 10 VA
- Max. Voltage to Ground: 600 V rms.
CAT III per IEC 61010-31