

PART #	"A" DIA.	"B" DIA.	"C" DIA.	"D"	"E"	"F" REF.	FIG #
POF-40022	.31(7.9)	.126(3.2)	.17(4.3)	.13(3.3)	.06(1.5)	.16(4.1)	1
POF-40048	.31(7.9)	.146(3.7)	.23(5.8)	.06(1.5)	.09(2.3)	.14(3.6)	1
POF-40059	.50(12.7)	.374(9.5)	.48(12.2)	.06(1.5)	.50(12.7)	.14(3.6)	2
POF-50185	.54(13.7)	.247(6.3)	.30(7.6)	.08(2.0)	.18(4.6)	.35(8.9)	3
POF-12664	.62(15.7)	.277(7.0)	.34(8.6)	.05(1.3)	.20(5.1)	.16(4.1)	3

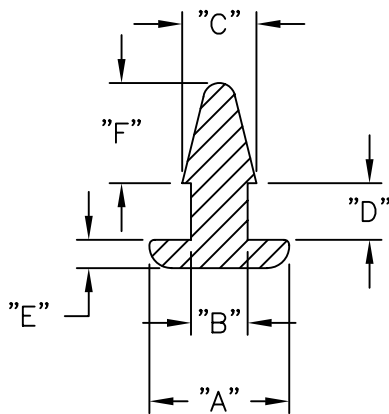


FIG. 1

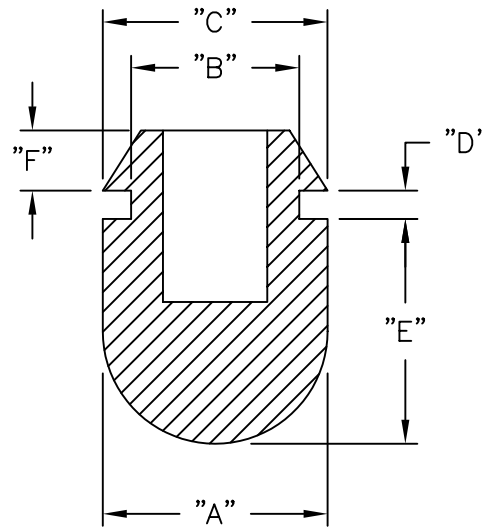


FIG. 2

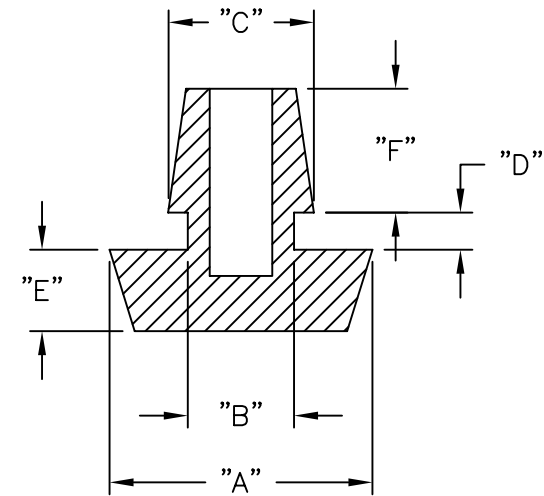


FIG. 3

NOTES:

1. MATERIAL: FLEXIBLE PVC, BLACK, 55A DUROMETER (RMS-25).
2. MOUNTING HOLE DIA: THE SAME AS DIM "B" ± 0.005 (± 0.13)

H	ADDED REF. TO DIM "F"	SM 10.24.01
G	ADDED RMS-25 TO MAT'L NOTE AND CHANGED FILE NO.	SM 06.19.01
F	"B" DIM. FOR P/N POF-40048 WAS .188(4.8)	JK 12.8.99
E	CORRECTED "C,D,E,F" DIMENSIONS	AM 5/6/99
D	CORRECTED "B" DIMENSIONS	MO 1/6/99
C	CHANGED DIM "A" AND "C" FOR FIG 3.	J.L. 11.3.97
B	DIM'S CORRECTED PER PARTS	JB 07.30.96
A	DIMENSION "F" ADDED	JP 05.31.96
REV	DESCRIPTION	ENGR DATE


TITLE:

PUSH ON FEET

TOLERANCES
UNLESS NOTED
.xx=±.015
[x.x=±0.38]
FRAC=±1/64
ANG=±1°

FILE # POF
MAT'L: SEE NOTES
RE: RICHCO, INC.

DWN: J.P.
APP:
DT: 11-29-95
DT:
RICHCO INC.
PO BOX 804238, CHICAGO, 60680
(773) 539-4060



DWG IN
IN (MM)



FINAL

PART #
SEE TABLE

PRINT
TYPE
CA