

# PS100RS THRU PS1010RS

## FAST SWITCHING PLASTIC DIODES

VOLTAGE - 50 to 1000 Volts CURRENT - 1.0 Ampere

### FEATURES

- High current capability
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound
- 1.0 ampere operation at  $T_A=55^{\circ}\text{C}$  with no thermal runaway
- Fast switching for high efficiency
- Exceeds environmental standards of MIL-S-19500/228
- Low leakage

### MECHANICAL DATA

Case: Molded plastic, A-405


Terminals: Plated axial leads, solderable per MIL-STD-202, Method 208

Polarity: Color band denotes cathode

Mounting Position: Any

Weight: 0.008 ounce, 0.22 gram

### A-405

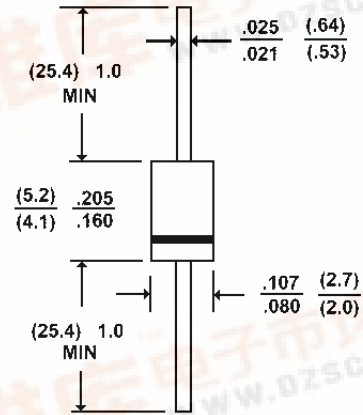

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^{\circ}\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

|                                                                                                  | PS100RS     | PS101RS | PS102RS | PS104RS | PS106RS | PS108RS | PS1010RS | UNITS                |
|--------------------------------------------------------------------------------------------------|-------------|---------|---------|---------|---------|---------|----------|----------------------|
| Maximum Recurrent Peak Reverse Voltage                                                           | 50          | 100     | 200     | 400     | 600     | 800     | 1000     | V                    |
| Maximum RMS Voltage                                                                              | 35          | 70      | 140     | 280     | 420     | 560     | 700      | V                    |
| Maximum DC Blocking Voltage                                                                      | 50          | 100     | 200     | 400     | 600     | 800     | 1000     | V                    |
| Maximum Average Forward Rectified Current .375"(9.5mm) lead length at $T_A=55^{\circ}\text{C}$   | 1.0         |         |         |         |         |         |          | A                    |
| Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method) | 30          |         |         |         |         |         |          | A                    |
| Maximum Forward Voltage at 1.0A DC                                                               | 1.3         |         |         |         |         |         |          | V                    |
| Maximum Reverse Current $T_J=25^{\circ}\text{C}$                                                 | 5.0         |         |         |         |         |         |          | $\mu\text{A}$        |
| at Rated DC Blocking Voltage $T_J=100^{\circ}\text{C}$                                           | 500         |         |         |         |         |         |          | $\mu\text{A}$        |
| Typical Junction capacitance (Note 1) C <sub>J</sub>                                             | 12          |         |         |         |         |         |          | pF                   |
| Typical Thermal Resistance (Note 3) R <sub>θJA</sub>                                             | 67          |         |         |         |         |         |          | $^{\circ}\text{C/W}$ |
| Maximum Reverse Recovery Time (Note 2)                                                           | 150         | 150     | 150     | 150     | 250     | 500     | 500      | ns                   |
| Operating and Storage Temperature Range $T_J, T_{STG}$                                           | -55 to +150 |         |         |         |         |         |          | $^{\circ}\text{C}$   |

### NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
2. Reverse Recovery Test Conditions:  $I_F=.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=.25\text{A}$
3. Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm) lead length P.C.B. mounted

## RATING AND CHARACTERISTIC CURVES

### PS100RS THRU PS1010RS

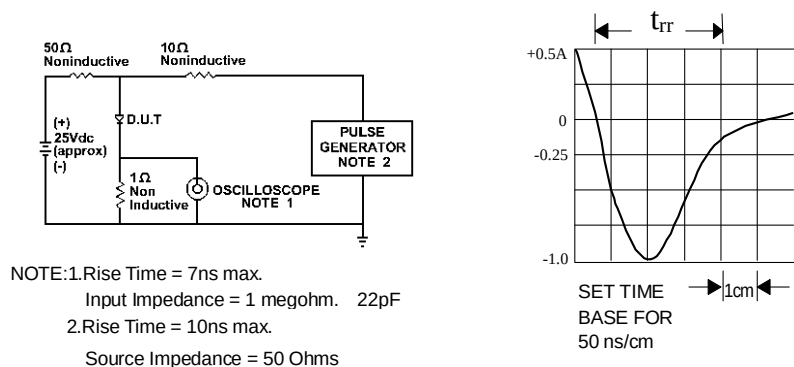


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

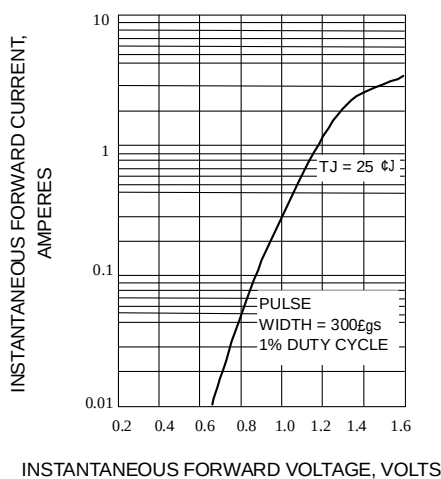


Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

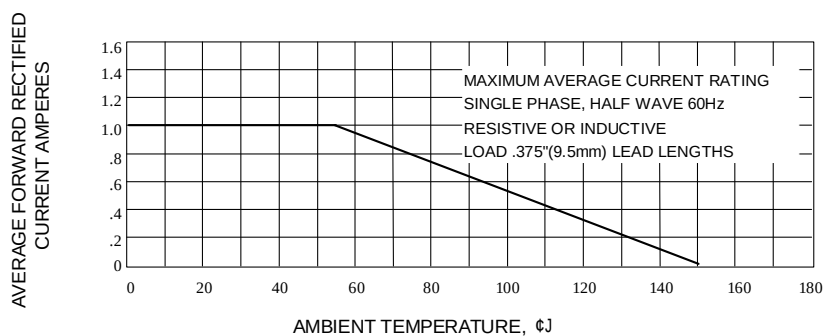


Fig. 3-FORWARD CURRENT DERATING CURVE

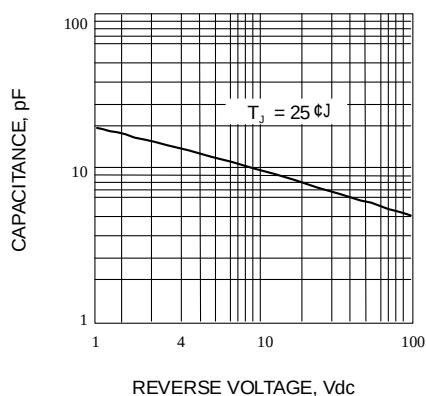


Fig. 4-TYPICAL JUNCTION CAPACITANCE

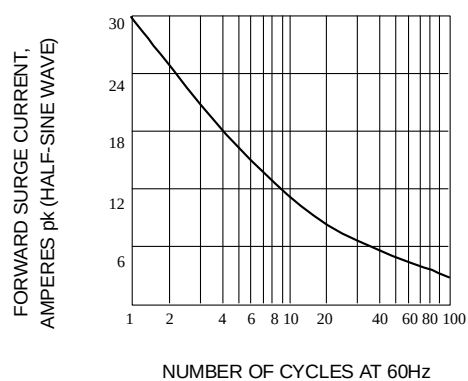


Fig. 5-PEAK FORWARD SURGE CURRENT