
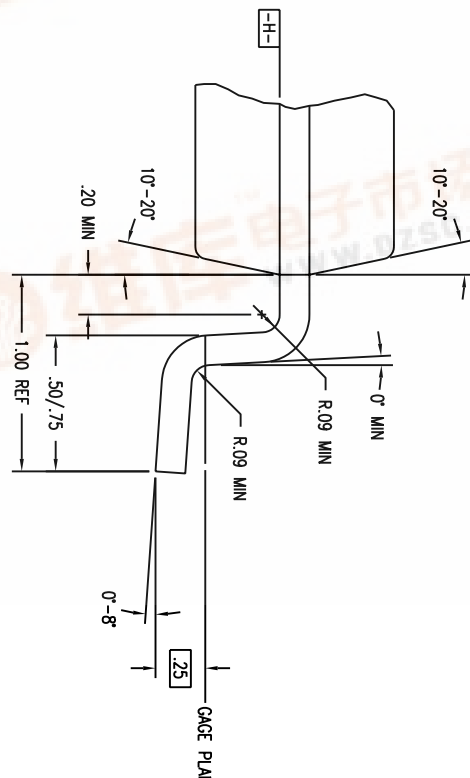
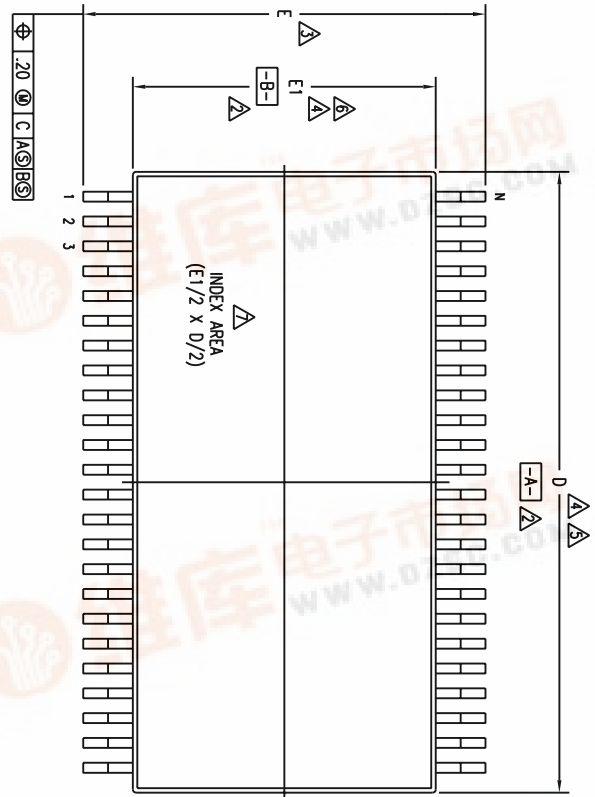



[查询PSC4039供应商](#)

DETAIL B

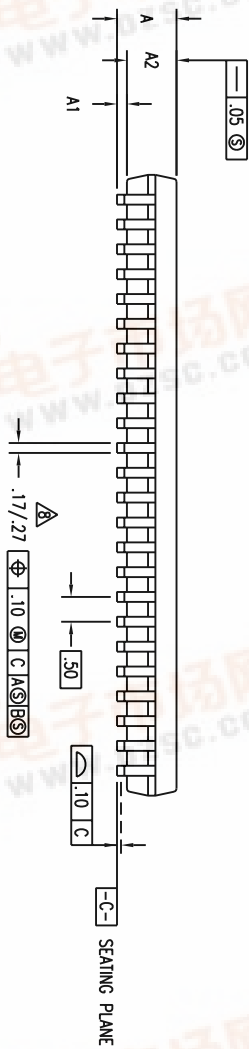

SEE DETAIL B

SECTION A-A

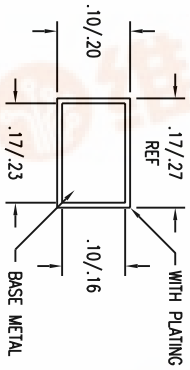

REVISIONS			
DCN	REV	DESCRIPTION	DATE
26490	02	CHANGE DIM A1	07/21/94
27494	03	REDRAW TO JEDEC FORMAT	03/08/95
61767	04	ADD 64 LD	01/15/99
05		ADD "GREEN" PAG NOMENCLATURE	10/14/04

10. FRANCES UNLESS SPECIFIED DECIMAL ANGULAR XXX+ XXX+ XXXX+		 www.IDT.com 3235 Stender Santa Clara, C PHONE: (408)	
APPROVALS	DATE	TITLE	
DRAWN		PA/PAG PACK/AC OUTLINE	
CHECKED		6.10 mm BODY WIDTH=SSO	
		.50 mm PITCH	
		SIZE	
		DRAWING No.	
		C	
		PSC 1039	
		DO NOT SCALE DRAWING	
		SHEET	

REVISIONS				
DCN	REV	DESCRIPTION	DATE	A
26490	02	CHANGE DIM A1	07/21/94	
27494	03	REDRAW TO JEDEC FORMAT	03/08/95	
61767	04	ADD 64 LD	01/15/99	
05		ADD "GREEN" PAG NOMENCLATURE	10/14/04	

LAND PATTERN DIMENSIONS


SYMBOL	JEDEC VARIATION			N D T E
	ED			
	MIN	NOM	MAX	
A	-	-	1.10	
A1	.05	-	.15	
A2	.85	1.00	1.05	
D	12.40	12.50	12.60	4.5
E	7.95	8.10	8.25	3
E1	6.00	6.10	6.20	4.6
N	48			

	JEDEC VARIATION			N D T E
	EE			
	MIN	NOM	MAX	
A	-	-	1.10	
A1	.05	-	.15	
A2	.85	1.00	1.05	
D	13.90	14.00	14.10	4.5
E	7.95	8.10	8.25	3
E1	6.00	6.10	6.20	4.6
N	56			

	JEDEC VARIATION			N D T E
	EF			
	MIN	NOM	MAX	
A	-	-	1.10	
A1	.05	-	.15	
A2	.85	1.00	1.05	
D	16.90	17.00	17.10	4.5
E	7.95	8.10	8.25	3
E1	6.00	6.10	6.20	4.6
N	64			

NOTES:

- 1 ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
- 2 DATUMS **-A-** AND **-B-** TO BE DETERMINED AT DATUM PLANE **-H-**
- 3 DIMENSION E TO BE DETERMINED AT SEATING PLANE **-C-**
- 4 DIMENSIONS D AND E1 ARE TO BE DETERMINED AT DATUM PLANE **-H-**
- 5 DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED .15 mm PER SIDE
- 6 DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED .25 mm PER SIDE
- 7 DETAIL OF PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED
- 8 LEAD WIDTH DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT
- 9 THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP
- 10 ALL DIMENSIONS ARE IN MILLIMETERS
- 11 THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-153, VARIATION ED, EE & EF

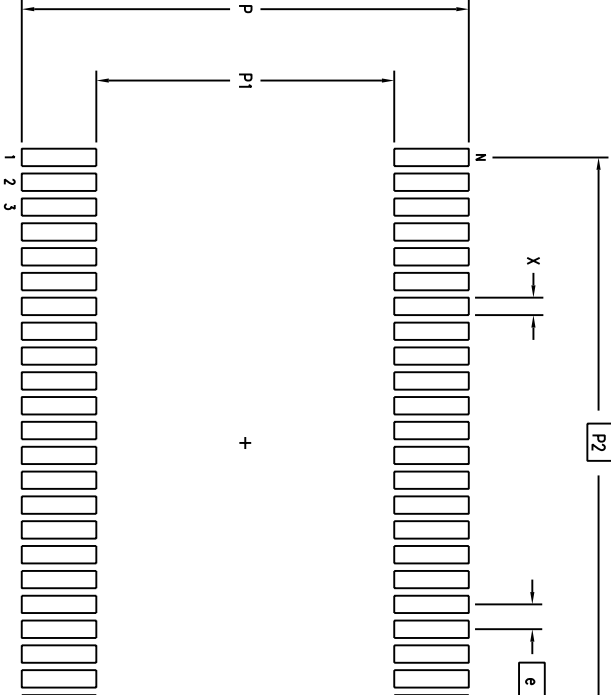

	MIN	MAX	MIN	MAX	MIN	MAX
P	8.90	9.10	8.90	9.10	8.90	9.10
P1	5.90	6.10	5.90	6.10	5.90	6.10
P2	11.50 BSC		13.50 BSC		15.50 BSC	
X	.30	.40	.30	.40	.30	.40
e	.50 BSC		.50 BSC		.50 BSC	
N	48		56		64	

TOLERANCES UNLESS SPECIFIED		IDT™	2975 Slender
DECIMAL	ANGULAR		
XX±	±		
XXX±			
XXXX±			
APPROVALS	DATE	www.IDT.com	
DRAWN		PA/PAG PACKAGE OUTLINE	
CHECKED		6.10 mm BODY WIDTH TSSC	
		.50 mm PITCH	
SIZE	DRAWING NO.	PSC-4039	
C		DO NOT SCALE DRAWING	
		SHEET	