

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT * PART NO.	NOMINAL BUNDLE DIAMETER	MAXIMUM RECOMMENDED BUNDLE DIAMETER	DIMENSIONS			WEIGHT lbs / 100 (g) / ft.
			"A" (Ref)	"B" (Ref)	"C"	
PW50_-----	0.50 (12.70)	0.55 (13.97)	0.47 (11.94)	0.125 (3.18)	0.032 (0.81)	2.01 (910.00)
PW75_-----	0.75 (19.05)	0.81 (20.57)	0.72 (18.29)		0.035 (0.89)	2.87 (1301.81)
PW100_-----	1.00 (25.40)	1.125 (28.58)	0.81 (20.57)		0.040 (1.02)	4.47 (2027.6)
PW150_-----	1.50 (38.10)	1.625 (41.28)	1.125 (28.58)		0.042 (1.07)	7.65 (3469.9)

NOTES:

- * 1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
 2. DIMENSION "A" IS STATIC INSIDE DIAMETER.
 DIMENSION "B" IS WIDTH OF BREAKOUT SLOTS.
 DIMENSION "C" IS WALL THICKNESS.

3. PANWRAP IS OFFERED IN THE FOLLOWING MATERIAL:

SAMPLE PART NUMBER:


PW75F-CQ

20 - NATURAL IN COLOR
 - BLACK

Q - 25 feet (7.62 meters)
 L - 50 feet (15.24 meters)
 C - 100 feet (30.48 meters)
 T - 200 feet (60.96 meters)


(REFER TO CURRENT PRODUCT OFFERING
 FOR OPTIONAL STANDARD PACKAGING QUANTITIES)

F - POLYETHYLENE

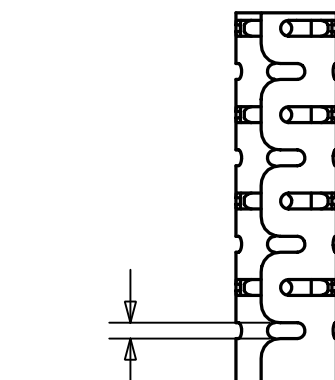


"B"

"A" Ø



"C"

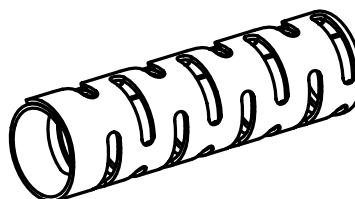

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G02508BH_PB_PANWRAP_00

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

PAN-WRAP
 (PW____-____)

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONAL TOLERANCES ARE:
 (.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
 (.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,
 ALL DIMENSIONS ARE GIVEN
 IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JAD

MAT'L:

SCALE

NONE

DATE 11/5/04

SEE NOTE 3

DRAWING NO.

GB2508BH

DWG
 SIZE
 A

R	11/5/04	JAD		INITIAL RELEASE, REPLACES G82508BA AND G82508BG	G82508BH	R					
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP			