





Preliminary

QR_1420T30
200 Amp/1400 Volts

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Fast Recovery Diode Module
200 Amp/1400 Volts

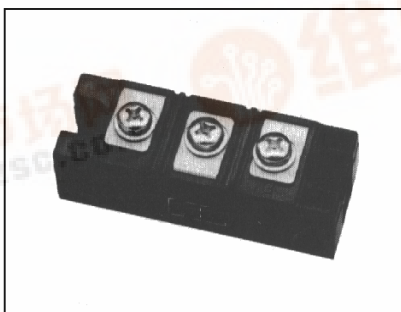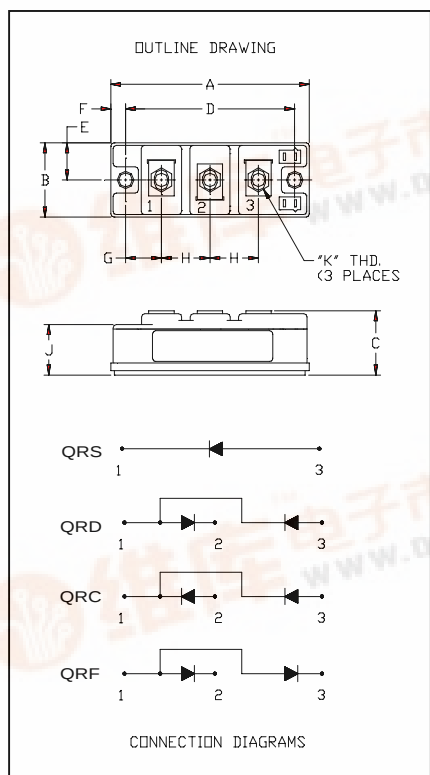

QR_1420T30
Fast Recovery Diode Module
200 Amperes / 1400 Volts

Description:

Powerex Fast Recovery Diode Modules are designed for use in applications requiring fast switching. The modules are isolated for easy mounting with other components on a common heatsink.

Features:

- Fast Recovery Time
- Isolated Mounting
- Metal Baseplate
- Low Thermal Impedance
- 3000 V isolating voltage

Applications:

- Switching Power Supplies
- Inverters
- Choppers
- Welding Power Supplies
- Free Wheeling Diode
- High Frequency Rectifiers

Dimensions	Inches	Millimeters
A	3.70	94
B	1.34	34
C	1.18	30
D	3.15	80
E	0.67	17
F	0.28	6.99
G	0.67	17.1
H	0.91	23
J	0.91	23
K	M6X1.0	M6X1.0



Preliminary

QR_1420T30
200 Amp/1400 Volts

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Fast Recovery Diode Module
200 Amp/1400 Volts

Absolute Maximum Ratings, $T_J=25^{\circ}\text{C}$ unless otherwise specified

Characteristics	Conditions	Symbol	QRS1420T30	Units
			QRD1420T30 QRC1420T30 QRF1420T30	
Repetitive Peak Reverse Blocking Voltage	-	V_{RRM}	1400	Volts
Non-Repetitive Peak Reverse Blocking Voltage	-	V_{RSM}	$V_{RRM} + 100$	Volts
Average Forward Current	180° Conduction, $T_C=25^{\circ}\text{C}$	$I_{F(AV)}$	200	Amperes
Peak Half Cycle Non-Repetitive Surge Current	$t = 8.3\text{mS}$, 100% V_{RRM} Reapplied	I_{FSM}	1330	Amperes
I^2t for Fusing for One Cycle	$t = 8.3\text{mS}$, 100% V_{RRM} Reapplied	I^2t	7400	A^2sec
Operating Junction Temperature	-	T_J	-40 to 150	$^{\circ}\text{C}$
Storage Temperature	-	T_{STG}	-40 to 150	$^{\circ}\text{C}$
Maximum Mounting Torque, M6 Mounting Screw	-	-	26	In.-lb.
Maximum Terminal Torque, M6 Terminal Screw	-	-	26	In.-lb.
Module Weight (Typical)	-	-	220	Grams
V Isolation	60 Hz, circuit to base, all terminals shorted, $t = 1 \text{ sec}$	V_{RMS}	3000	Volts

Electrical Characteristics, $T_J=25^{\circ}\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Peak Reverse Leakage Current	I_{RRM}	$T_J = 150^{\circ}\text{C}$, Rated V_{RRM}	-	-	1	mA
Peak On-State Voltage	V_{FM}	$I_F=200\text{A}$	-	-	3.8	Volts
Reverse Recovery Time	t_{rr}	$I_F = 200\text{A}$, $di/dt = -400\text{A}/\mu\text{S}$	-	-	300	ns
Reverse Recovery Charge	Q_{rr}	$I_F = 200\text{A}$, $di/dt = -400\text{A}/\mu\text{S}$	-	2.0	-	μC

Thermal Characteristics, $T_J=25^{\circ}\text{C}$ unless otherwise specified

Characteristics	Symbol		Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{\theta JC}$	Per Diode	-	-	0.18	$^{\circ}\text{C}/\text{Watt}$
Thermal Resistance, Case to Sink Lubricated	$R_{\theta CS}$	Per Module	-	-	0.04	$^{\circ}\text{C}/\text{Watt}$



Preliminary

QR_1420T30
200 Amp/1400 Volts

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Fast Recovery Diode Module
200 Amp/1400 Volts

