


Silicon Power Rectifier S/R20 Series

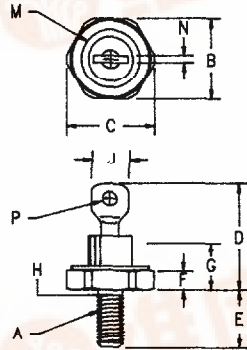

Notes:

1. 10-32 UNF3A
2. Full threads within 2 1/2 threads
3. Standard Polarity: Stud is Cathode
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.91	4.44	
G	---	.405	---	10.29	
H	.163	.189	4.15	4.80	2
J	---	.310	---	7.87	
M	---	.350	---	8.89	Dia
N	.020	.065	.510	1.65	
P	.070	.100	1.78	2.54	Dia

D0203AA (D04)

Microsemi Catalog Number Standard	JEDEC Numbers	Peak Reverse Voltage	• Glass Passivated Die • Low Forward Voltage • 200A Surge Rating • Glass to metal construction • V_{RRM} to 1200V • Excellent reliability
*S2020		200V	
*S2040	1N1126, 1N1346, 1N1346A, 1N1345B	400V	
*S2060	1N1128, 1N1348, 1N1348A, 1N1348B, 1N1587, 1N1616, 1N2238, 1N2497	600V	
*S2080	1N2240	800V	
*S20100		1000V	
*S20120		1200V	
*Change S to R in part number for Reverse Polarity			

Electrical Characteristics

Average forward current	IF(AV) 16 Amps	$T_C = 153^\circ\text{C}$, half sine wave, $R_{\theta JC} = 2.5^\circ\text{C/W}$
Maximum surge current	IFSM 200 Amps	8.3ms, half sine, $T_J = 200^\circ\text{C}$
Max I^2t for fusing	I^2t 165 A ² s	
Max peak forward voltage	VF 1.3 Volts	IFM = 30A; $T_J = 25^\circ\text{C}$
Max peak reverse current	IRM 10 μA	$V_{RRM}, T_J = 25^\circ\text{C}$
Max peak reverse current	IRM 1.0 mA	$V_{RRM}, T_J = 150^\circ\text{C}$
Max Recommended Operating Frequency	10kHz	
*Pulse test: Pulse width 300 μsec . Duty cycle 2%		

Thermal and Mechanical Characteristics

Storage temperature range	TSTG	-65°C to 200°C
Operating junction temp range	TJ	-65°C to 200°C
Maximum thermal resistance	$R_{\theta JC}$	2.5°C/W Junction to Case
Typical thermal resistance	$R_{\theta JC}$	2.0°C/W Junction to Case
Mounting torque		30 inch pounds maximum
Weight		.16 ounces (5.0 grams) typical

Microsemi Corp.
Colorado

S/R20

|

Figure 1
Typical Forward Characteristics

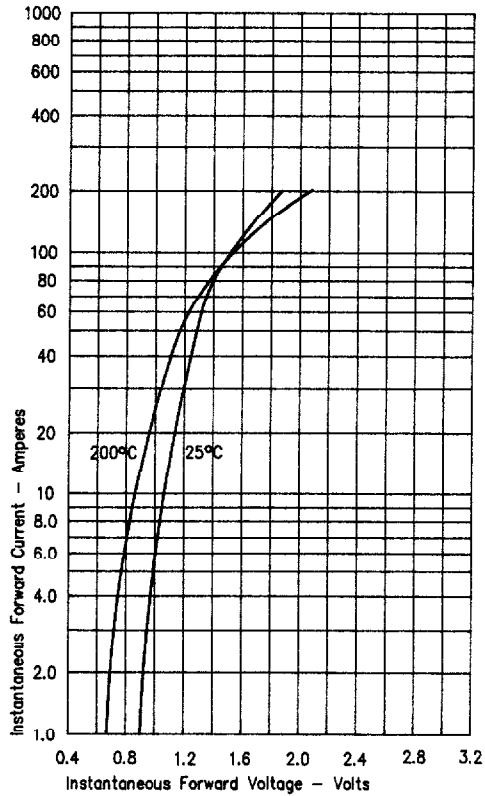


Figure 3
Forward Current Derating


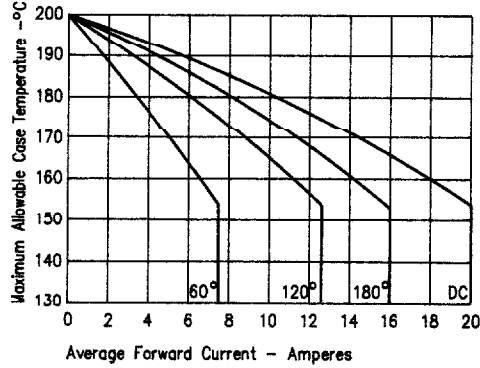


Figure 4
Maximum Forward Power Dissipation

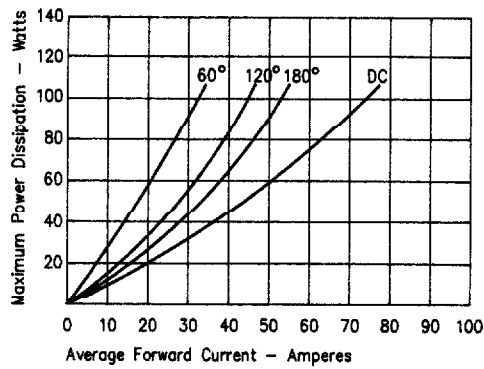

E

Figure 2
Typical Reverse Characteristics


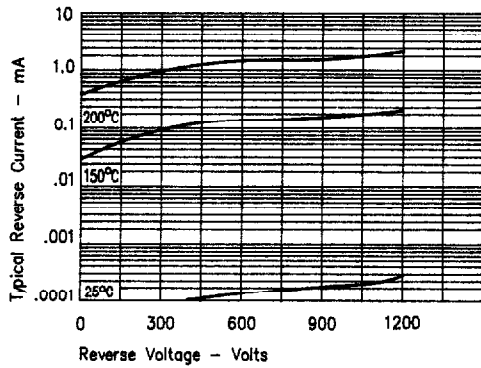


Figure 5
Transient Thermal Impedance



S/R20

I

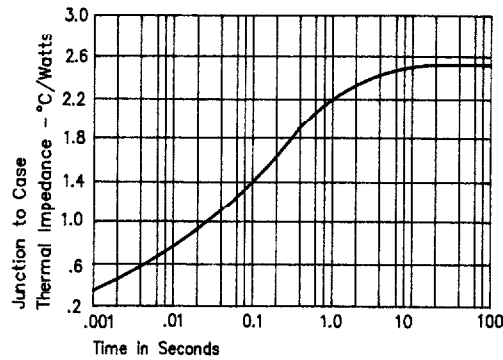