

LC Series



**UL Recognized
CSA Certified**

Capacitance components enhance the filtering performance in the LC models. Available with block or sleeve inductance, the additional chip capacitors provide additional filtering on each line. The series features shields with a board ground or spring finger panel interface.

Specifications

Contacts

Material:	Phosphor bronze
Plating:	50 microlnches gold
Barrier underplating:	100 microlnches nickel
Resistance:	
Initial:	20 milliohms maximum
After durability testing (500 mating cycles):	30 milliohms maximum

Capacitors

Type:	Monolithic ceramic chip
Standard value	820 pF
Standard tolerance	±20%

Ferrites

Type:	High resistivity, nickel zinc ceramic
Sleeves:	Single-aperature cylinders
Block:	Multi-aperature rectangular prism

Shield Material

Solder-plated copper alloy

Housing Material

Glass-filled polyester (UL94V-0)


Dielectric Withstanding Voltage

Line-to-line and line-to-ground	1000 VAC for 60 seconds
---------------------------------	----------------------------

Printed Circuit Board Retention

Before soldering:	1 lb. minimum
After soldering:	20 lb. minimum

Model dimensions and PC board layout on pages 131 to 133.

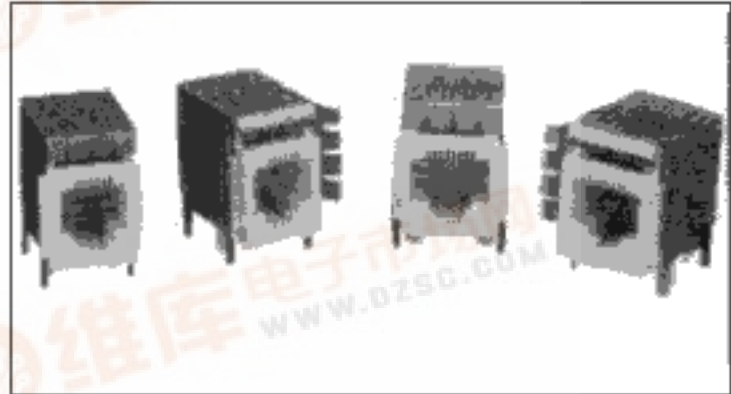

LC Models

Typical insertion loss in dB
Line-to-ground (stop band) in a 50 ohm circuit

	Frequency-MHz						
	30	60	80	100	200	500	1000
Ferrite Sleeves	28	40	51	40	27	24	22
Ferrite Blocks	30	41	59	40	31	28	24

Typical insertion loss in dB
Line-to-line (pass band) in a 50 ohm circuit

	Frequency-MHz						
	2	5	10	30	50	70	100
Ferrite Sleeves		4	8	18	24	30	40
Ferrite Blocks	1	8	11	21	28	33	37

Pricing

Consult your local Corcom sales representative for pricing.

Part No.	Part No.
RJ11-2LC1-S	RJ11-6LC2-S
RJ11-2LC1-B	RJ11-6LC2-B
RJ11-2LC2-S	RJ45-6LC1-S
RJ11-2LC2-B	RJ45-6LC1-B
RJ11-4LC1-S	RJ45-6LC2-S
RJ11-4LC1-B	RJ45-6LC2-B
RJ11-4LC2-S	RJ45-8LC1-S
RJ11-4LC2-B	RJ45-8LC1-B
RJ11-6LC1-S	RJ45-8LC2-S
RJ11-6LC1-B	RJ45-8LC2-B