

M·C·C·

Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

**RL201GP
THRU
RL207GP**

Features

- Low Cost
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability
- Glass Passivated Junction

**2 Amp Glass
Passivated Rectifier
50 to 1000 Volts**

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Typical Thermal Resistance ($R_{\theta JA}$) 50°C/W


Microsemi Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
RL201GP	---	50V	35V	50V
RL202GP	---	100V	70V	100V
RL203GP	---	200V	140V	200V
RL204GP	---	400V	280V	400V
RL205GP	---	600V	420V	600V
RL206GP	---	800V	560V	800V
RL207GP	---	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	2 A	$T_A = 75^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	60A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.0V	$I_{FM} = 2.0\text{A};$ $T_A = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5.0 μA 50 μA	$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$
Typical Junction Capacitance	C_J	20pF	Measured at 1.0MHz, $V_R=4.0\text{V}$

*Pulse Test: Pulse Width 300 μsec , Duty Cycle 1%

DO-15

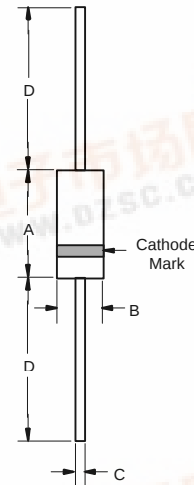


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.230	.300	5.80	7.60	
B	.104	.140	2.60	3.60	
C	.026	.034	.70	.90	
D	1.000	---	25.40	---	

RL201GP thru RL207GP




Figure 1
Typical Forward Characteristics

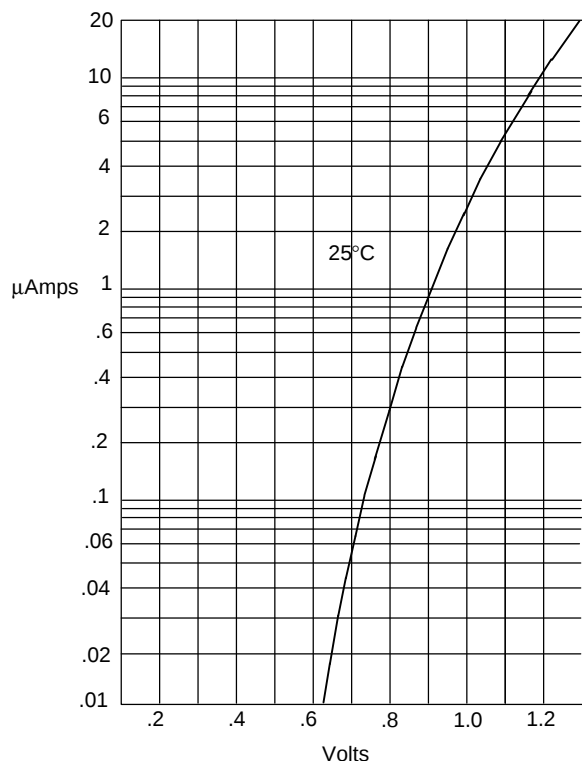


Instantaneous Forward Current - MicroAmperes
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

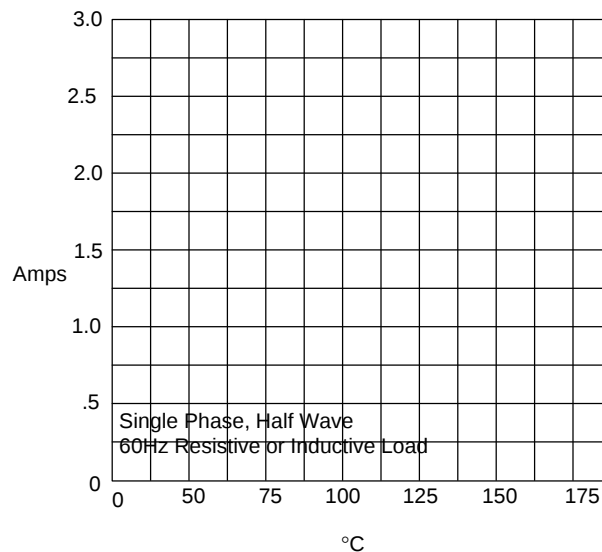

Average Forward Rectified Current - Amperes
Ambient Temperature - °C

Figure 3
Junction Capacitance

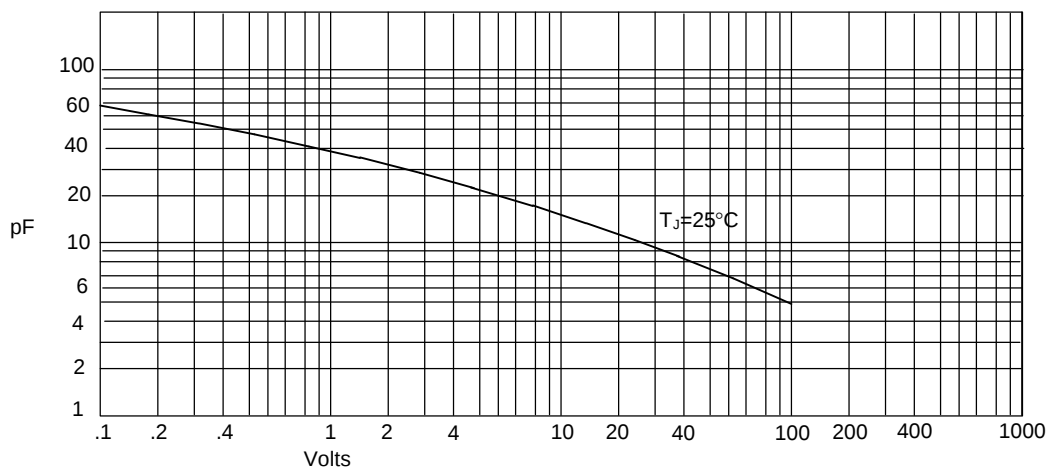


Junction Capacitance - pF
Reverse Voltage - Volts

RL201GP thru RL207GP




Figure 4
Typical Reverse Characteristics

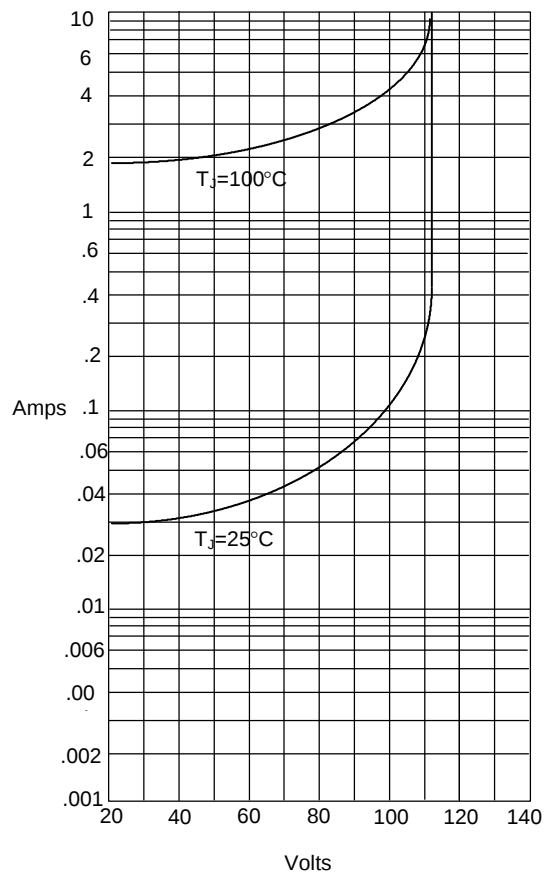

Instantaneous Reverse Current - Amperes
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

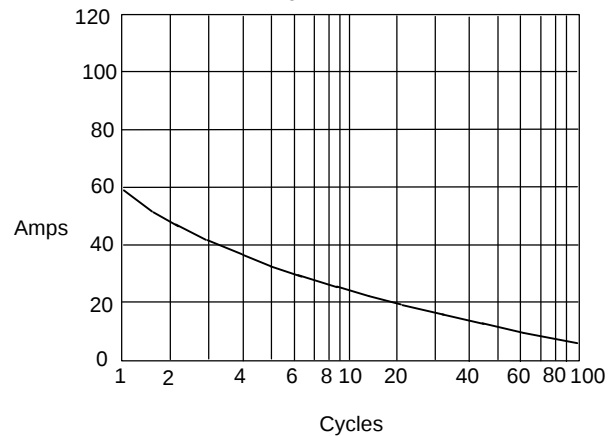

Peak Forward Surge Current - Amperes
Number Of Cycles At 60Hz - Cycles