

# SHINDENGEN

## General Purpose Rectifiers

Single

# S2V20

## 200V 1.7A

### FEATURES

- High voltage
- High reliability with superior moisture resistance
- Applicable to Automatic Insertion


### APPLICATION

- Conventional Rectification
- Power source(Power Supply)
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

## OUTLINE DIMENSIONS

Case : AX10

Unit : mm

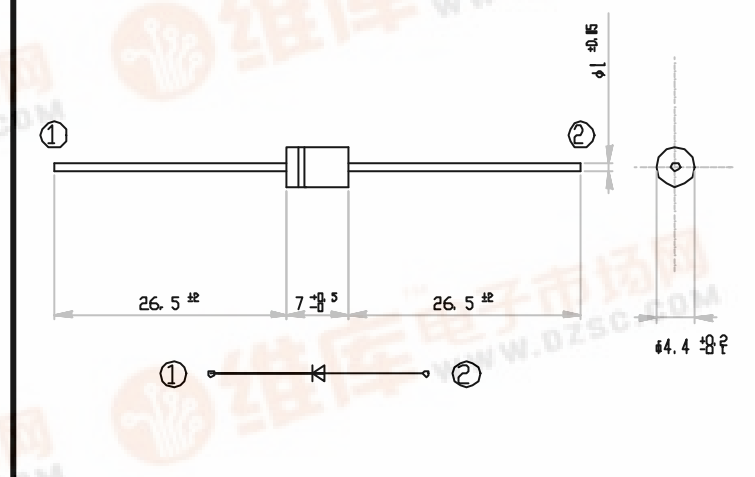

## RATINGS

### ●Absolute Maximum Ratings (If not specified Tl=25°C)


| Item                              | Symbol           | Conditions                                                | Ratings | Unit             |
|-----------------------------------|------------------|-----------------------------------------------------------|---------|------------------|
| Storage Temperature               | Tstg             |                                                           | -55~150 | °C               |
| Operating Junction Temperature    | Tj               |                                                           | 150     | °C               |
| Maximum Reverse Voltage           | V <sub>RM</sub>  |                                                           | 200     | V                |
| Average Rectified Forward Current | I <sub>O</sub>   | 50Hz sine wave, R-load, Ta=40°C                           | 1.7     | A                |
| Peak Surge Forward Current        | I <sub>FSM</sub> | 50Hz sine wave, Non-repetitive 1cycle peak value, Tj=25°C | 60      | A                |
| Current Squared Time              | I <sup>2</sup> t | 1ms≤t<10ms Tj=25°C                                        | 20      | A <sup>2</sup> s |

### ●Electrical Characteristics (If not specified Tl=25°C)

| Item               | Symbol          | Conditions                                          | Ratings  | Unit |
|--------------------|-----------------|-----------------------------------------------------|----------|------|
| Forward Voltage    | V <sub>F</sub>  | I <sub>F</sub> =1.7A, Pulse measurement             | Max.1.05 | V    |
| Reverse Current    | I <sub>R</sub>  | V <sub>R</sub> =V <sub>RM</sub> , Pulse measurement | Max.10   | μA   |
| Thermal Resistance | θ <sub>JL</sub> | junction to lead                                    | Max.8    | °C/W |


S2Vx

Forward Voltage

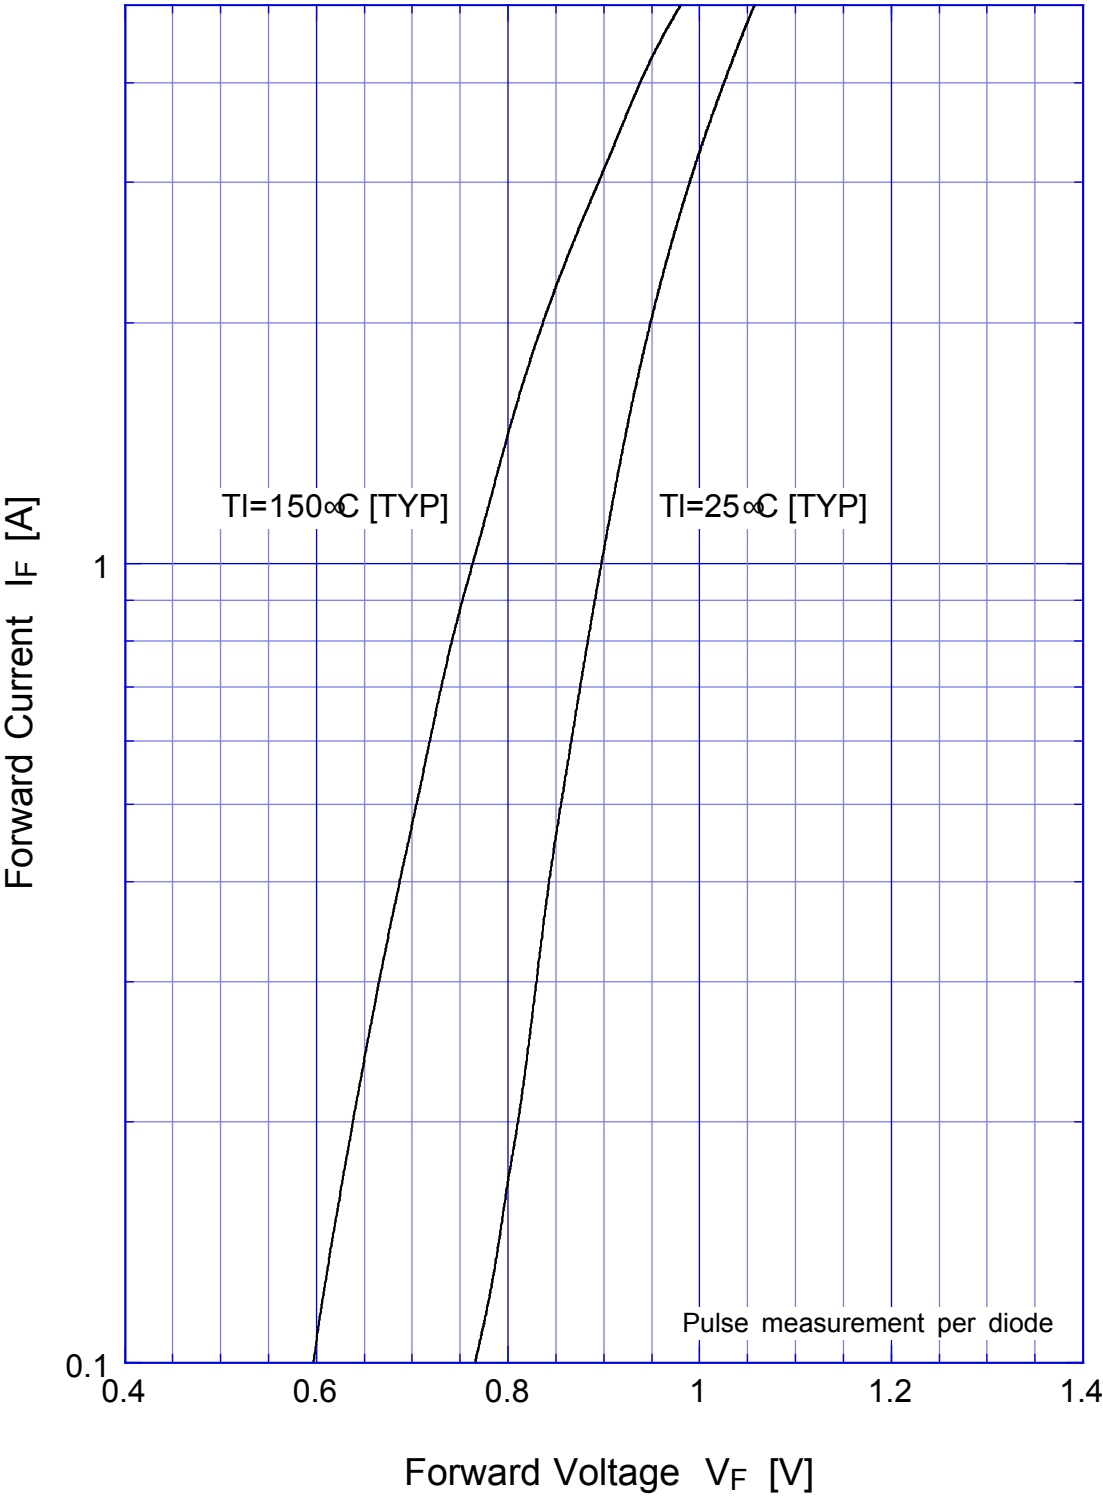

S2Vx


Forward Power Dissipation

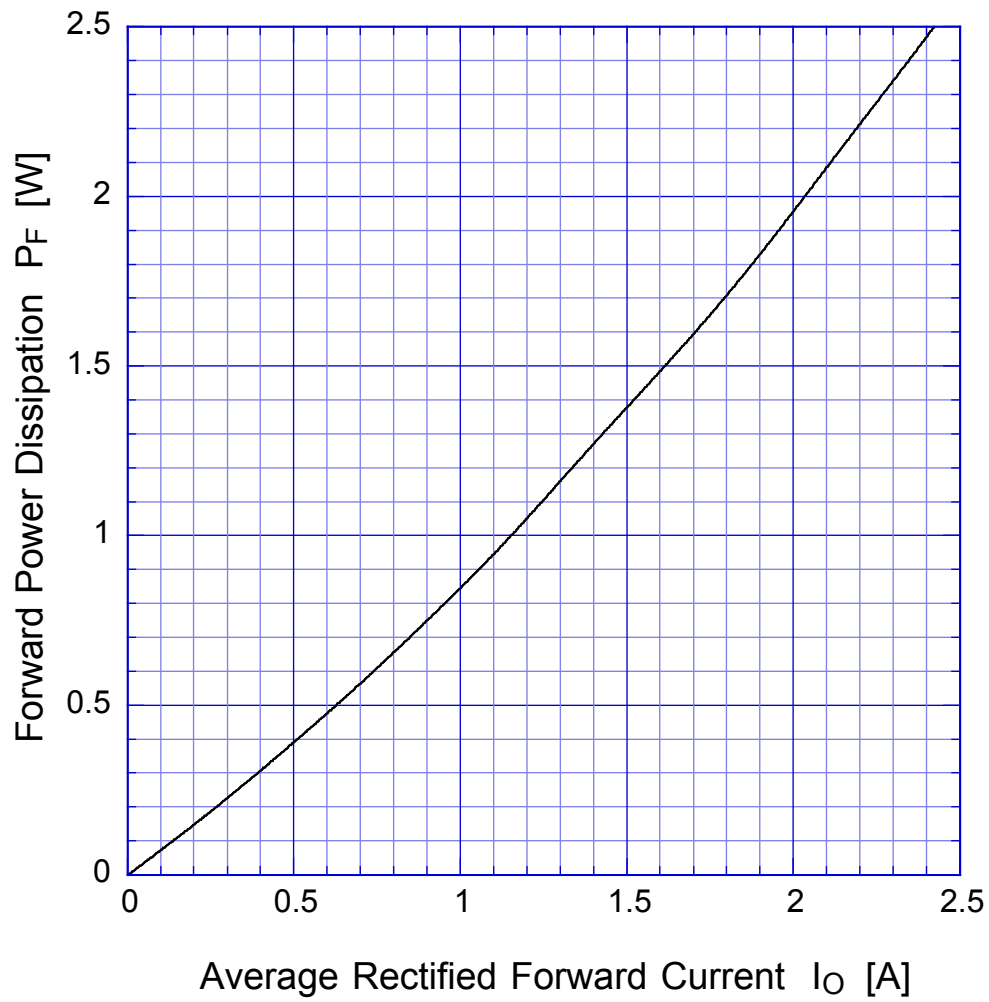

$T_j = 150^{\circ}\text{C}$   
Sine wave

S2Vx


Derating Curve

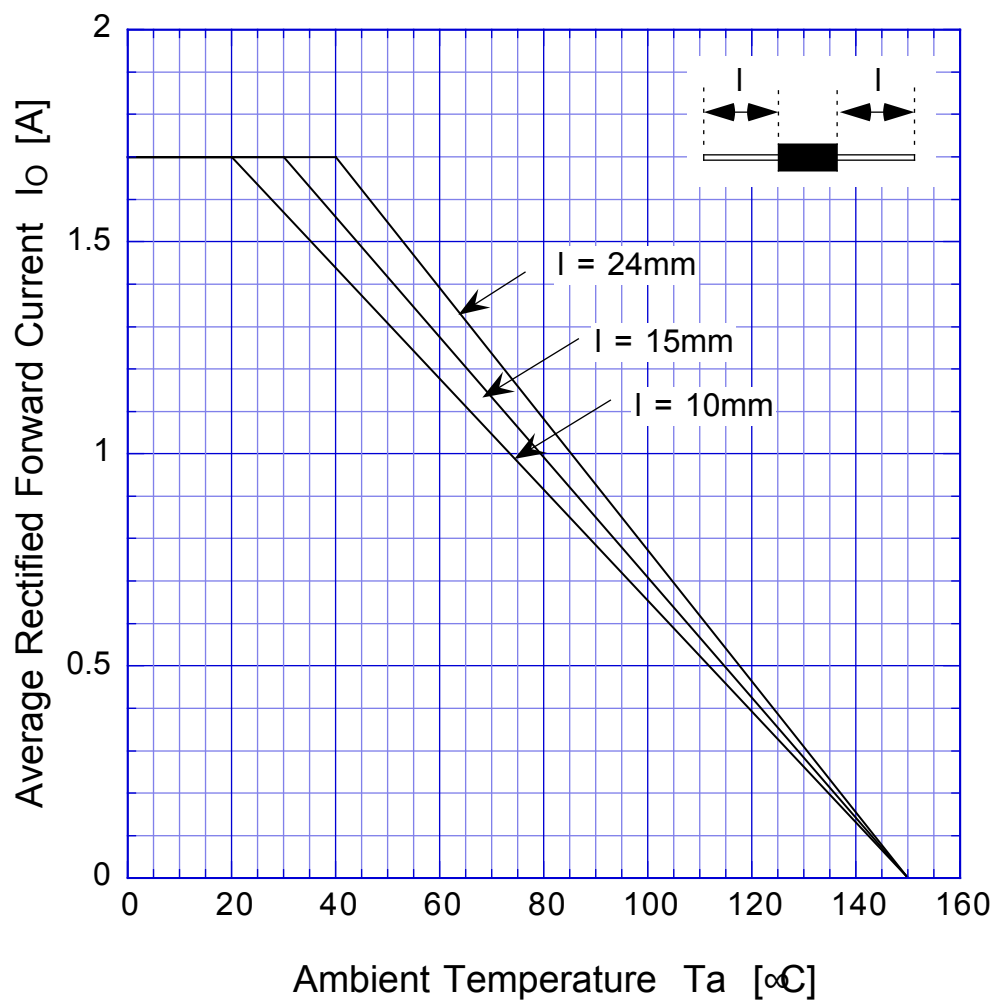

Sine wave  
R-load  
Free in air

S2Vx

## Peak Surge Forward Capability

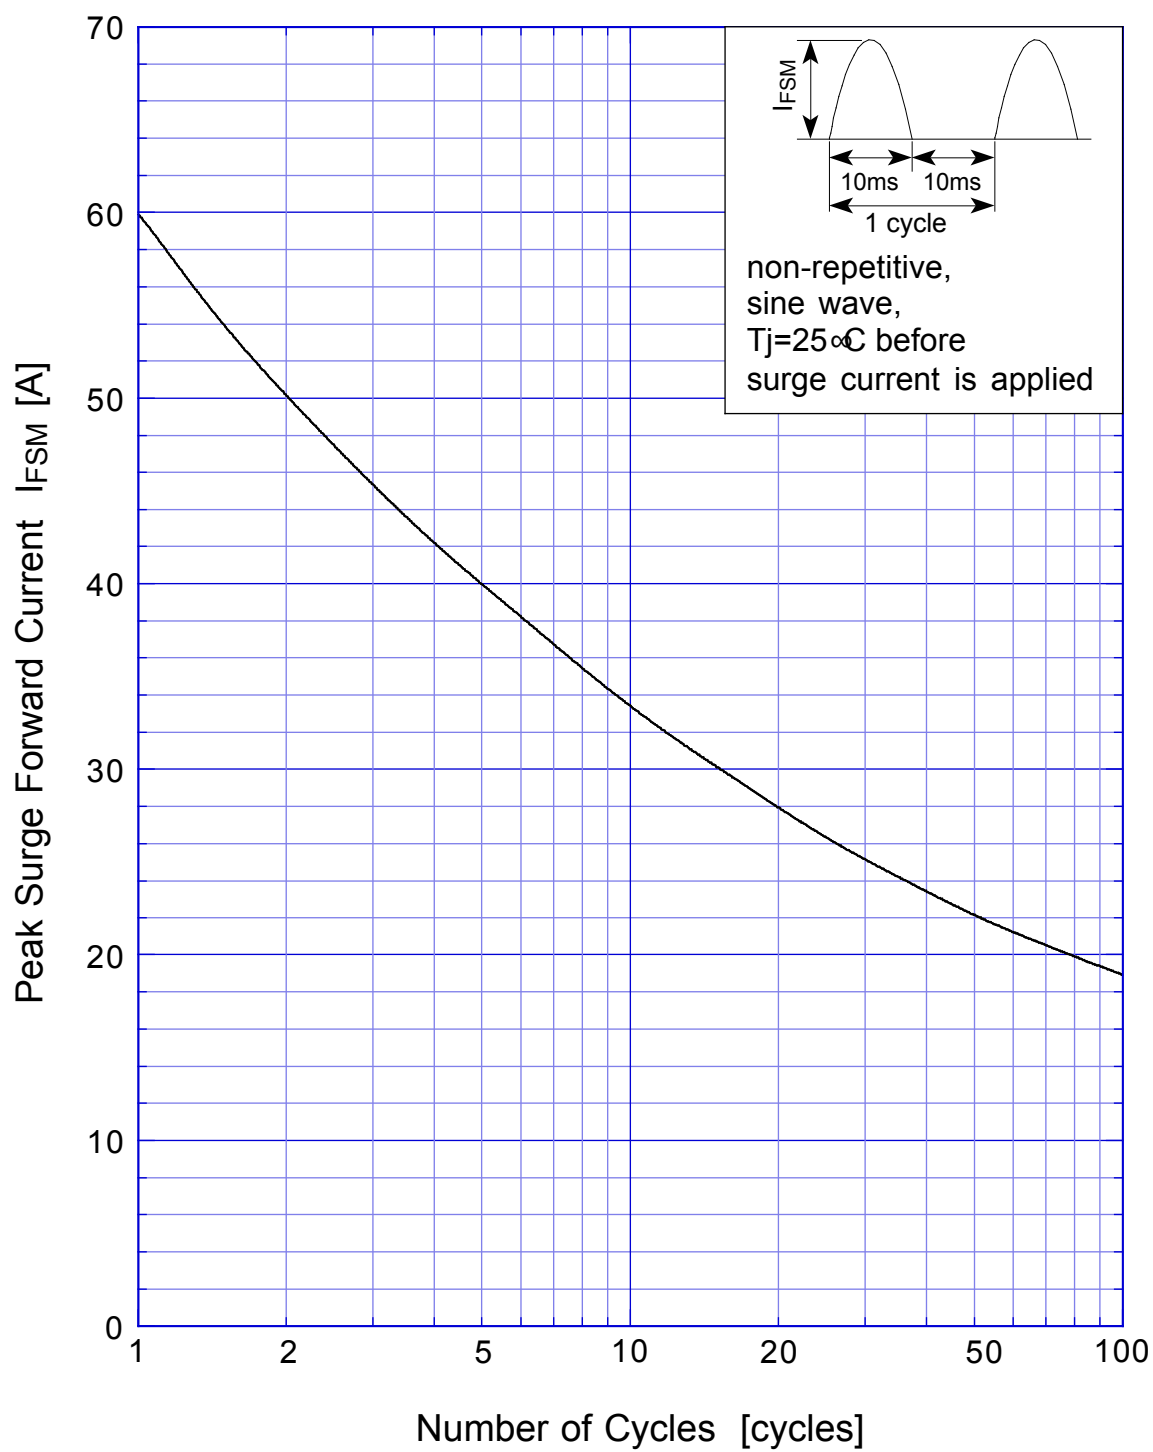

S2Vx      Transient Thermal Impedance

---

