


FEATURES

- 25Ω cut-off bus outputs
- 50Ω receiver outputs
- Transmit and receive registers with separate clocks
- 1500ps max. delay from CLK1 to Bus Outputs (BUS)
- 1500ps max. delay from CLK2 to Receiver Outputs (Q)
- Individual bus enable pins
- Internal 75KΩ input pull-down resistors
- Voltage and temperature compensation for improved noise immunity
- Industry standard 100K ECL levels
- Extended supply voltage option:
VEE = -4.2V to -5.5V
- Available in 28-pin PLCC package

DESCRIPTION


The SY100S891 is a 5-bit registered transceiver containing five bus transceivers with both transmit and receive registers. The bus outputs (BUS0 – BUS4) are specified for driving a 25 ohm bus and the receive outputs (Q0 – Q4) are specified for driving a 50 ohm line. The bus outputs have a normal high level output voltage and a normal low level output voltage when the bus enable (BUSEN0 – BUSEN4) is high. However, the output is switched to a cut-off level when a bus-enable is low. This cut-off level is sufficiently low that a relatively high impedance is presented to the bus in order to minimize reflections. There is one bus-enable for each bus driver; a clock (CLK1) which is common to all five bus driver registers; and a separate clock (CLK2) which is common to all five receive registers. Data at the D inputs is clocked to the Bus register by a positive transition of CLK1 and data on the bus is clocked into the Receiver register by a positive transition of CLK2. A high on the Master Reset clears all registers.

PIN CONFIGURATION

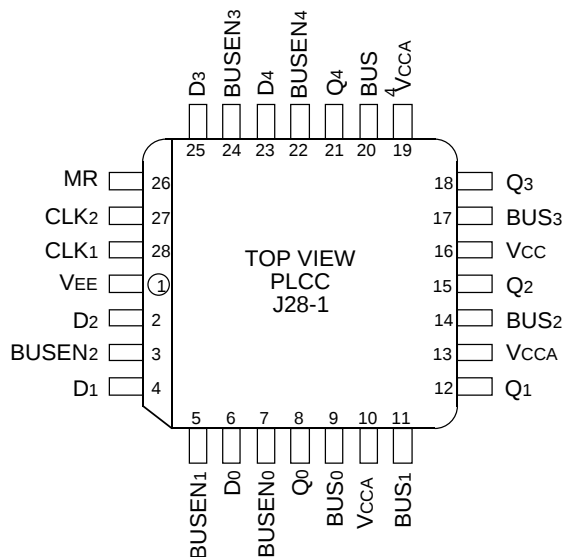

PIN NAMES

Pin	Function
BUSEN0-4	Bus Enable Inputs
D0 – D4	Data Inputs
CLK1	Bus Driver Clock Input
CLK2	Receive Register Clock
MR	Master Reset
Q0 – Q4	Bus Receive Outputs
BUS0-4	Bus Outputs

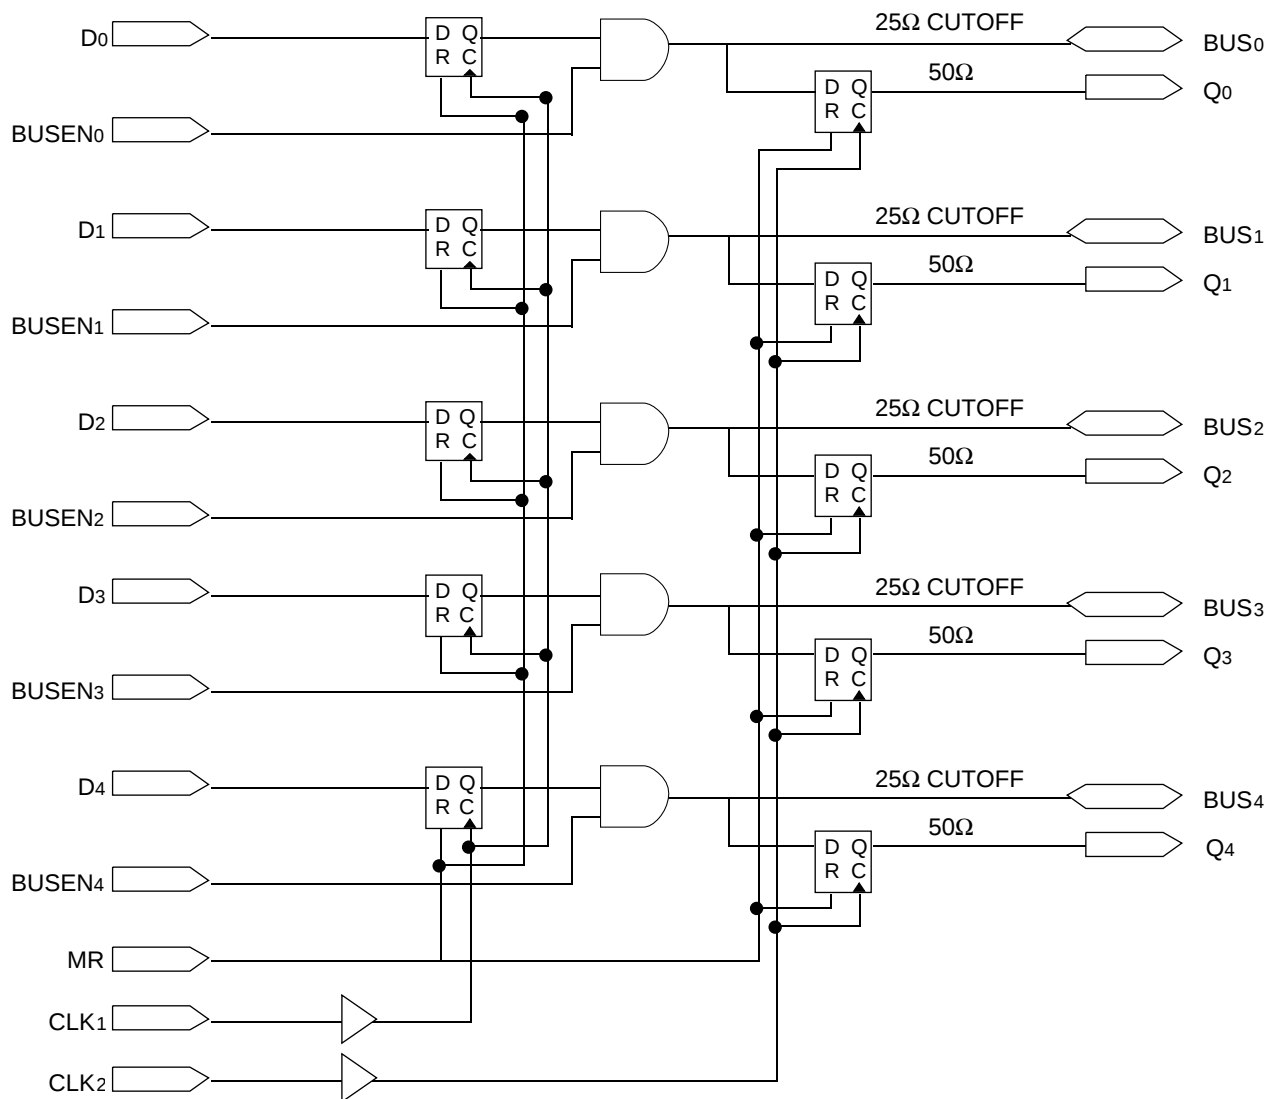BLOCK DIAGRAM

DC ELECTRICAL CHARACTERISTICS

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	Min.	Typ.	Max.	Unit	Condition	
V _{CUT}	Cut-off Bus Output Voltage	−2200	−2160	−2100	mV	V _{IN} = V _{IH} (Max.) or V _{IL} (Min.)	Loading with 25Ω to −2.20V
V _{OH}	Output HIGH Voltage Bus	−1025	−955	−880	mV	V _{IN} = V _{IH} (Max.) or V _{IL} (Min.)	Loading with 25Ω to −2.0V
V _{OL}	Output LOW Voltage Bus	−1810	−1705	−1620	mV		
V _{OHA}	Output HIGH Voltage Bus	−1035	—	—	mV	V _{IN} = V _{IH} (Min.) or V _{IL} (Max.)	
V _{OLA}	Output LOW Voltage Bus	—	—	−1610	mV		
V _{OH}	Output HIGH Voltage Receiver	−1025	−955	−880	mV	V _{IN} = V _{IH} (Max.) or V _{IL} (Min.)	Loading with 50Ω to −2.0V
V _{OL}	Output LOW Voltage Receiver	−1810	−1705	−1620	mV		
V _{OHA}	Output HIGH Voltage Receiver	−1035	—	—	mV	V _{IN} = V _{IH} (Min.) or V _{IL} (Max.)	
V _{OLA}	Output LOW Voltage Receiver	—	—	−1610	mV		
V _{IH}	Input HIGH Voltage	−1165	—	−880	mV	Guaranteed HIGH Signal for All Inputs	
V _{IL}	Input LOW Voltage	−1810	—	−1475	mV	Guaranteed LOW Signal for All Inputs	
I _{IL}	Input LOW Current	0.5	—	—	μA	V _{IN} = V _{IL} (Min.)	
I _{IH}	Input High Current	—	—	150	μA	V _{IN} = V _{IH} (Max.)	
I _{EE}	Power Supply Current	−216	—	—	mA	Inputs Open	
C _{IN}	Input Pin Capacitance	—	4	—	pF		
C _{OUT}	Output Pin Capacitance	—	5	—	pF		

AC ELECTRICAL CHARACTERISTICS

$V_{EE} = -4.2V$ to $-5.5V$ unless otherwise specified; $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_A = 0^{\circ}C$			$T_A = +25^{\circ}C$			$T_A = +85^{\circ}C$			Unit	Condition
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
t _{PLH} t _{PHL}	Propagation Delay ⁽¹⁾ CLK ₁ to Bus	600	1000	1500	600	1000	1500	600	1000	1500	ps	
t _{PLH} t _{PHL}	Propagation Delay ⁽²⁾ CLK ₂ to Q	500	800	1200	500	800	1200	500	800	1200	ps	
t _{PLH} t _{PHL}	Propagation Delay ⁽¹⁾ BUSEN to Bus	500	800	1200	500	800	1200	500	800	1200	ps	
t _{PLH} t _{PHL}	Propagation Delay ⁽¹⁾ Master Reset to Bus	600	1000	1500	600	1000	1500	600	1000	1500	ps	
t _{PLH} t _{PHL}	Propagation Delay ⁽²⁾ Master Reset to Q	500	800	1200	500	800	1200	500	800	1200	ps	
t _s	Set-up Time Bus Wrt CLK ₂ D Wrt CLK ₁	—	—	400	—	—	400	—	—	400	ps	
		—	—	400	—	—	400	—	—	400		
t _{REL}	Master Reset Release Time	—	—	1000	—	—	1000	—	—	1000	ps	
t _H	Hold Time Bus Wrt CLK ₂ D Wrt CLK ₁	—	—	400	—	—	400	—	—	400	ps	
		—	—	400	—	—	400	—	—	400		
t _r	Output Rise Time Bus ⁽³⁾ Q ⁽⁴⁾	500	—	1000	500	—	1000	500	—	1000	ps	
		300	—	900	300	—	900	300	—	900		
t _f	Output Fall Time Bus ⁽³⁾ Q ⁽⁴⁾	500	—	1000	500	—	1000	500	—	1000	ps	
		300	—	900	300	—	900	300	—	900		
t _{skew}	Skew (Maximum difference between slowest and fastest path)	—	100	—	—	100	—	—	100	—	ps	


NOTES:

1. Loaded with 25Ω to $-2.0V$
2. Loaded with 50Ω to $-2.0V$
3. 25Ω Load
4. 50Ω Load

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY100S891JC	J28-1	Commercial
SY100S891JCTR	J28-1	Commercial

28 LEAD PLCC (J28-1)

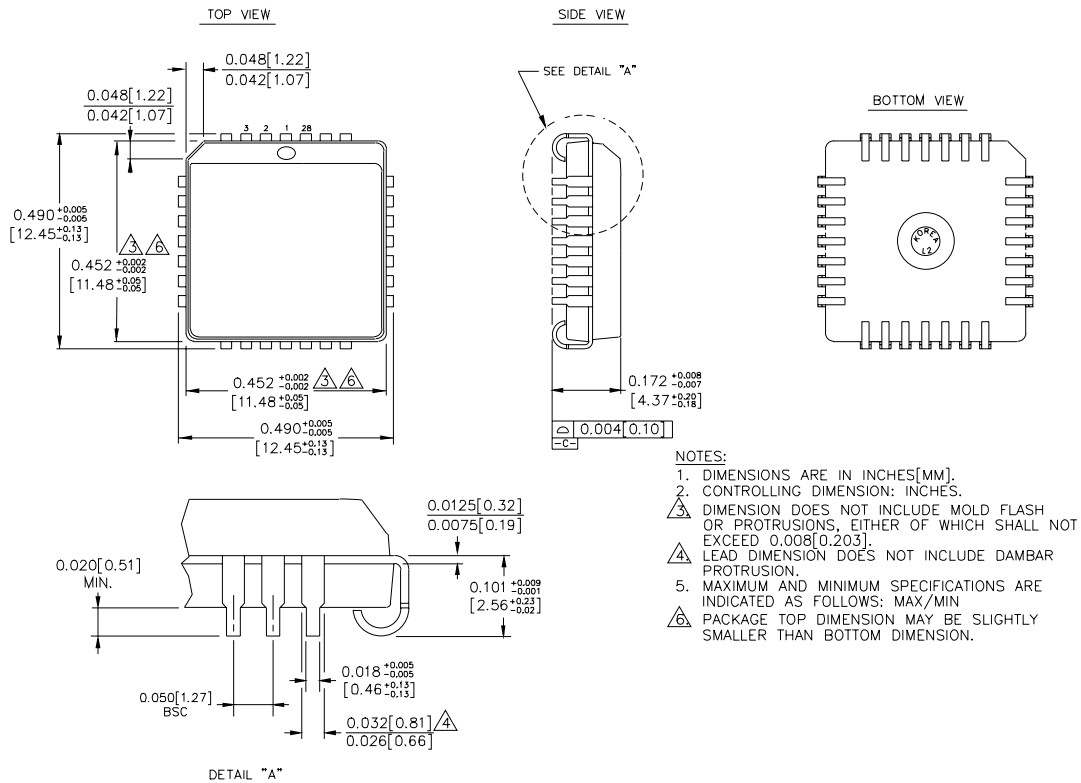

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USA

TEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated

Copyright Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com