



# SBL1630PT - SBL1660PT


## 16A SCHOTTKY BARRIER RECTIFIER

### Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application
- Plastic Material - UL Flammability Classification 94V-0

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 5.6 grams (approx)
- Mounting Position: Any
- Marking: Type Number

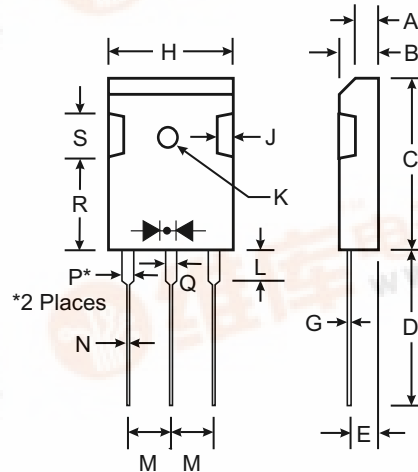

| TO-3P                |              |        |
|----------------------|--------------|--------|
| Dim                  | Min          | Max    |
| A                    | 3.20         | 3.50   |
| B                    | 4.59         | 5.16   |
| C                    | 20.80        | 21.30  |
| D                    | 19.70        | 20.20  |
| E                    | 2.10         | 2.40   |
| G                    | 0.51         | 0.76   |
| H                    | 15.90        | 16.40  |
| J                    | 1.70         | 2.70   |
| K                    | 3.10 Ø       | 3.30 Ø |
| L                    | 3.50         | 4.51   |
| M                    | 5.20         | 5.70   |
| N                    | 1.12         | 1.22   |
| P                    | 1.93         | 2.18   |
| Q                    | 2.97         | 3.22   |
| R                    | 11.70        | 12.80  |
| S                    | 4.30 Typical |        |
| All Dimensions in mm |              |        |

### Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| Characteristic                                                                                                        | Symbol                          | SBL 1630PT  | SBL 1635PT | SBL 1640PT | SBL 1645PT | SBL 1650PT | SBL 1660PT | Unit        |
|-----------------------------------------------------------------------------------------------------------------------|---------------------------------|-------------|------------|------------|------------|------------|------------|-------------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                                | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 30          | 35         | 40         | 45         | 50         | 60         | V           |
| RMS Reverse Voltage                                                                                                   | $V_R(RMS)$                      | 21          | 24.5       | 28         | 31.5       | 35         | 42         | V           |
| Average Rectified Output Current<br>(Note 1) @ $T_C = 95^{\circ}C$                                                    | $I_O$                           | 16          |            |            |            |            |            | A           |
| Non-Repetitive Peak Forward Surge Current 8.3ms<br>single half sine-wave superimposed on rated load<br>(JEDEC Method) | $I_{FSM}$                       | 250         |            |            |            |            |            | A           |
| Forward Voltage Drop @ $I_F = 8.0A, T_C = 25^{\circ}C$                                                                | $V_{FM}$                        | 0.55        |            |            |            | 0.70       |            | V           |
| Peak Reverse Current @ $T_C = 25^{\circ}C$<br>at Rated DC Blocking Voltage @ $T_C = 100^{\circ}C$                     | $I_{RM}$                        | 0.5<br>50   |            |            |            |            |            | mA          |
| Typical Junction Capacitance (Note 2)                                                                                 | $C_j$                           | 700         |            |            |            |            |            | pF          |
| Typical Thermal Resistance Junction to Case (Note 1)                                                                  | $R_{\theta Jc}$                 | 3.5         |            |            |            |            |            | K/W         |
| Operating and Storage Temperature Range                                                                               | $T_j, T_{STG}$                  | -65 to +150 |            |            |            |            |            | $^{\circ}C$ |

- Notes: 1. Thermal resistance junction to case mounted on heatsink.  
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.



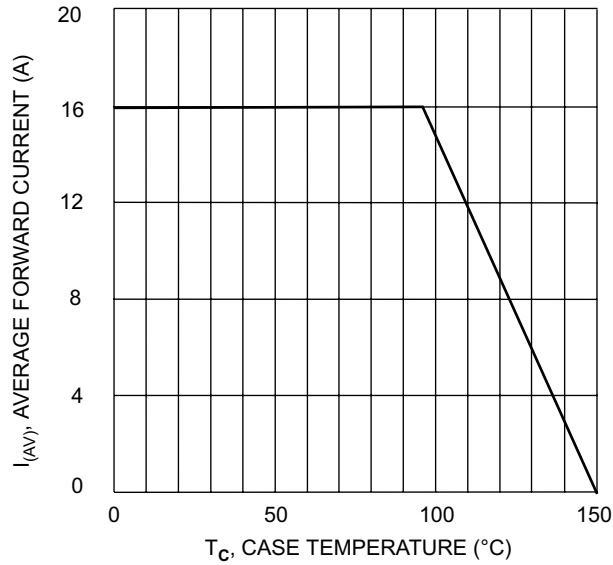


Fig. 1 Forward Current Derating Curve

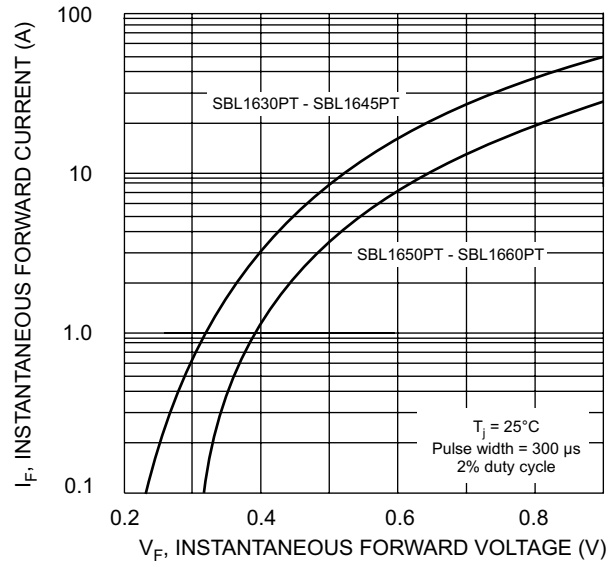


Fig. 2 Typical Forward Characteristics per Element

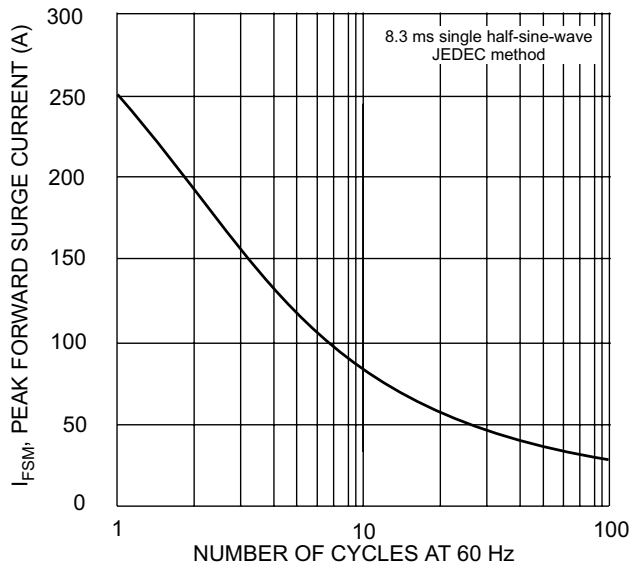


Fig. 3 Max Non-Repetitive Surge Current

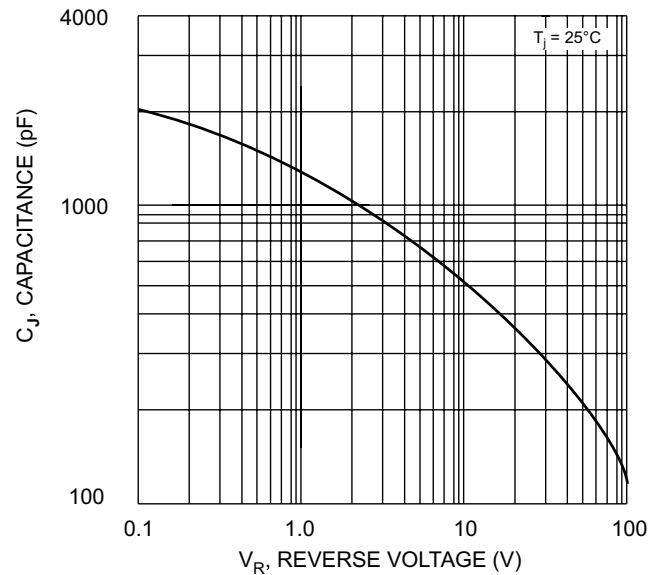


Fig. 4 Typical Junction Capacitance per Element

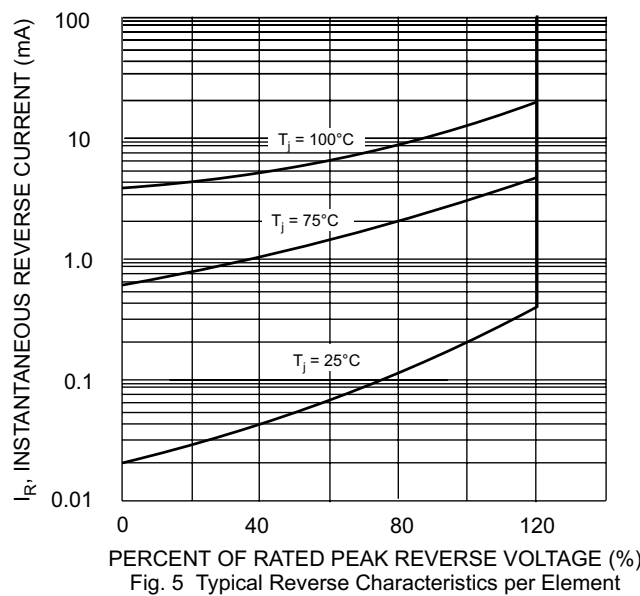


Fig. 5 Typical Reverse Characteristics per Element