



SFF1601G THRU SFF1608G

Isolation 16.0 AMPS. Glass Passivated Super Fast Rectifiers



Voltage Range
50 to 600 Volts
Current
16.0 Amperes


Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Cases: ITO-220AB molded plastic
- Epoxy: UL 94V-O rate flame retardant
- Terminals: Leads solderable per MIL-STD-202, Method 208 guaranteed
- Polarity: As marked
- High temperature soldering guaranteed: 260°C/10 seconds .025", (6.35mm) from case.
- Weight: 2.24 grams
- Mounting torque: 5 in – lbs. max.

ITO-220AB

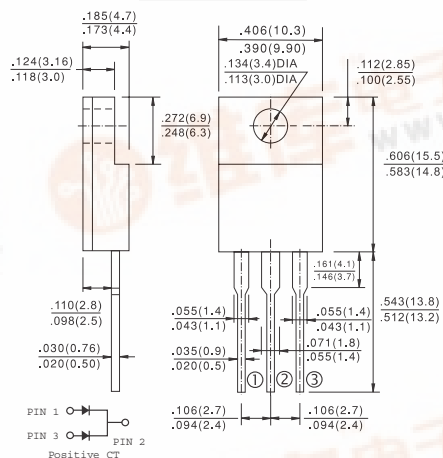

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SFF 1601G	SFF 1602G	SFF 1603G	SFF 1604G	SFF 1605G	SFF 1606G	SFF 1607G	SFF 1608G	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current @T _C = 100°C	I _(AV)	16.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	125								A
Maximum Instantaneous Forward Voltage @ 8.0A	V _F	0.975				1.3		1.7		V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =100°C	I _R	10 400								uA uA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	35								nS
Typical Junction Capacitance (Note 2)	C _j	80				60				pF
Typical Thermal Resistance (Note 3)	Rθ _{JC}	1.5								°C/W
Operating Temperature Range	T _J	-65 to +150								°C
Storage Temperature Range	T _{STG}	-65 to +150								°C

- Notes: 1. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
 3. Mounted on Heatsink Size of 3 in x 5 in x 0.25 in Al-Plate.

RATINGS AND CHARACTERISTIC CURVES (SFF1601G THRU SFF1608G)

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


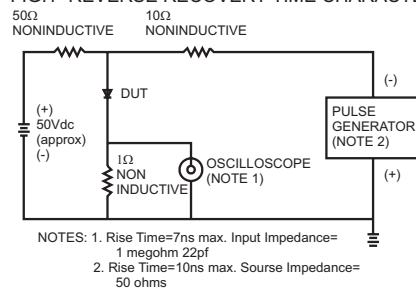


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

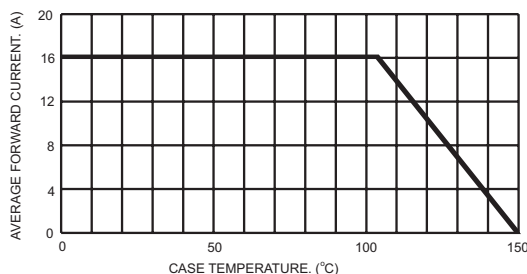


FIG.4- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

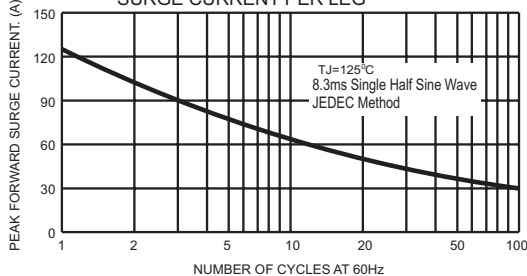


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

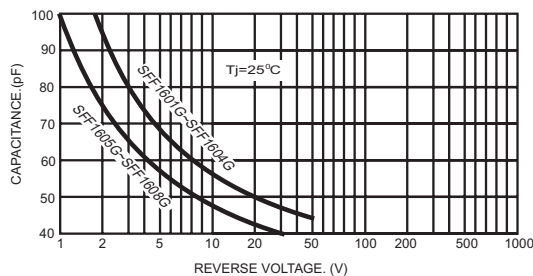


FIG.3- TYPICAL REVERSE CHARACTERISTICS

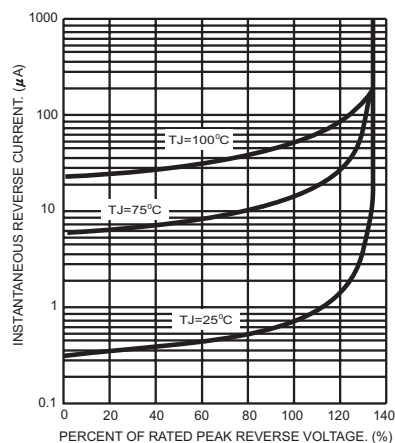


FIG.6- TYPICAL FORWARD CHARACTERISTICS PER LEG

