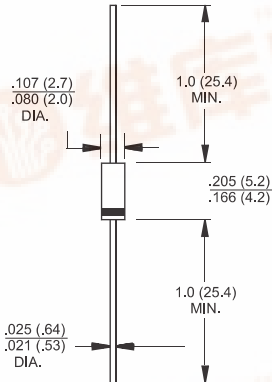


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                   |                   |             |          |                                                                                                                                                                  |          |          |          |          |          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------|-------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|
| <div>TSC<br/>S</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <div>SFR101S THRU SFR107S</div> <div>1.0 AMP. Soft Fast Recovery Rectifiers</div> |                   |             |          |                                                                                                                                                                  |          |          |          |          |          |
| <div><div></div><div>S</div><div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                   |                   |             |          | <div>Voltage Range</div> <div>50 to 1000 Volts</div> <div>Current</div> <div>1.0 Ampere</div>                                                                    |          |          |          |          |          |
| <div>Features</div> <div><div><div>✧</div>Low forward voltage drop</div><div><div>✧</div>High current capability</div><div><div>✧</div>High reliability</div><div><div>✧</div>High surge current capability</div><div><div>✧</div>Fast switching for high efficiency</div></div>                                                                                                                                                                                                     |                                                                                   |                   |             |          | <div>A-405</div> <div></div> <div>Dimensions in inches and (millimeters)</div> |          |          |          |          |          |
| <div>Mechanical Data</div> <div><div><div>✧</div>Cases: Molded plastic</div><div><div>✧</div>Epoxy: UL 94V-0 rate flame retardant</div><div><div>✧</div>Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed</div><div><div>✧</div>Polarity: Color band denotes cathode end</div><div><div>✧</div>High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension</div><div><div>✧</div>Weight: 0.22 gram</div></div> |                                                                                   |                   |             |          |                                                                                                                                                                  |          |          |          |          |          |
| <div>Maximum Ratings and Electrical Characteristics</div> <div>Rating at 25°C ambient temperature unless otherwise specified.</div> <div>Single phase, half wave, 60 Hz, resistive or inductive load.</div> <div>For capacitive load, derate current by 20%</div>                                                                                                                                                                                                                    |                                                                                   |                   |             |          |                                                                                                                                                                  |          |          |          |          |          |
| Type Number                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                   | Symbol            | SFR 101S    | SFR 102S | SFR 103S                                                                                                                                                         | SFR 104S | SFR 105S | SFR 106S | SFR 107S | Units    |
| Maximum Recurrent Peak Reverse Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                   | V <sub>RRM</sub>  | 50          | 100      | 200                                                                                                                                                              | 400      | 600      | 800      | 1000     | V        |
| Maximum RMS Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                   | V <sub>RMS</sub>  | 35          | 70       | 140                                                                                                                                                              | 280      | 420      | 560      | 700      | V        |
| Maximum DC Blocking Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                   | V <sub>DC</sub>   | 50          | 100      | 200                                                                                                                                                              | 400      | 600      | 800      | 1000     | V        |
| Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length @ T <sub>A</sub> = 55°C                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                   | I <sub>(AV)</sub> | 1.0         |          |                                                                                                                                                                  |          |          |          |          | A        |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                   | I <sub>FSM</sub>  | 30          |          |                                                                                                                                                                  |          |          |          |          | A        |
| Maximum Instantaneous Forward Voltage @ 1.0A                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                   | V <sub>F</sub>    | 1.2         |          |                                                                                                                                                                  |          |          |          |          | V        |
| Maximum DC Reverse Current @ T <sub>A</sub> =25°C at Rated DC Blocking Voltage @ T <sub>A</sub> =100°C                                                                                                                                                                                                                                                                                                                                                                               |                                                                                   | I <sub>R</sub>    | 5.0<br>100  |          |                                                                                                                                                                  |          |          |          |          | uA<br>uA |
| Maximum Reverse Recovery Time ( Note 1 )                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                   | T <sub>rr</sub>   | 120         |          |                                                                                                                                                                  |          | 200      | 350      |          | nS       |
| Typical Junction Capacitance ( Note 2 )                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                   | C <sub>j</sub>    | 10          |          |                                                                                                                                                                  |          |          |          |          | pF       |
| Typical Thermal Resistance ( Note 3 )                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                   | R <sub>θJA</sub>  | 100         |          |                                                                                                                                                                  |          |          |          |          | °C/W     |
| Operating Temperature Range                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                   | T <sub>J</sub>    | -65 to +150 |          |                                                                                                                                                                  |          |          |          |          | °C       |
| Storage Temperature Range                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                   | T <sub>STG</sub>  | -65 to +150 |          |                                                                                                                                                                  |          |          |          |          | °C       |

Notes: 1. Reverse Recovery Test Conditions:  $I_F = 0.5A$ ,  $I_R = 1.0A$ ,  $I_{RR} = 0.25A$

2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

3. Mount on Cu-Pad Size 5mm x 5mm on P.C.B.

## RATINGS AND CHARACTERISTIC CURVES (SFR101S THRU SFR107S)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

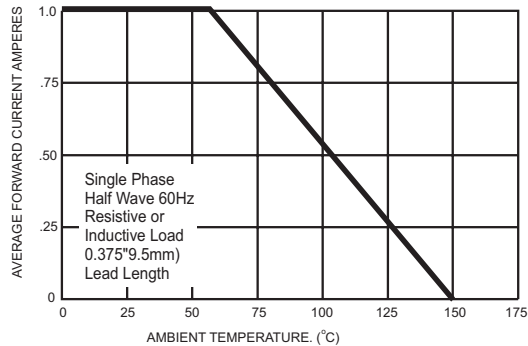


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

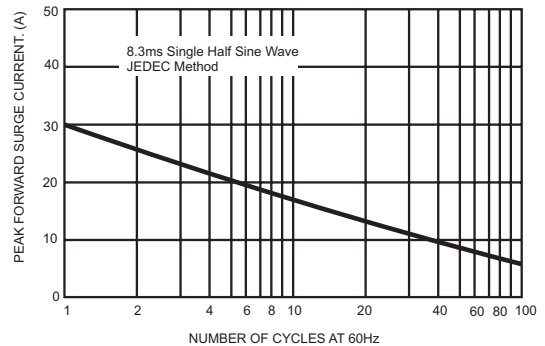


FIG.3- TYPICAL FORWARD CHARACTERISTICS

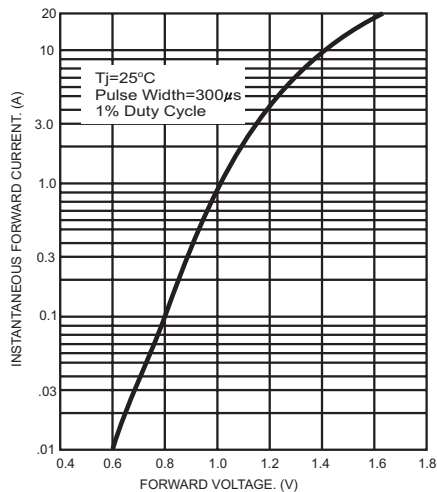


FIG.4- TYPICAL JUNCTION CAPACITANCE

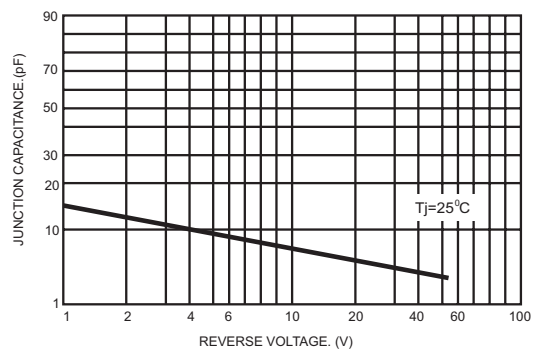


FIG.5- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

