


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

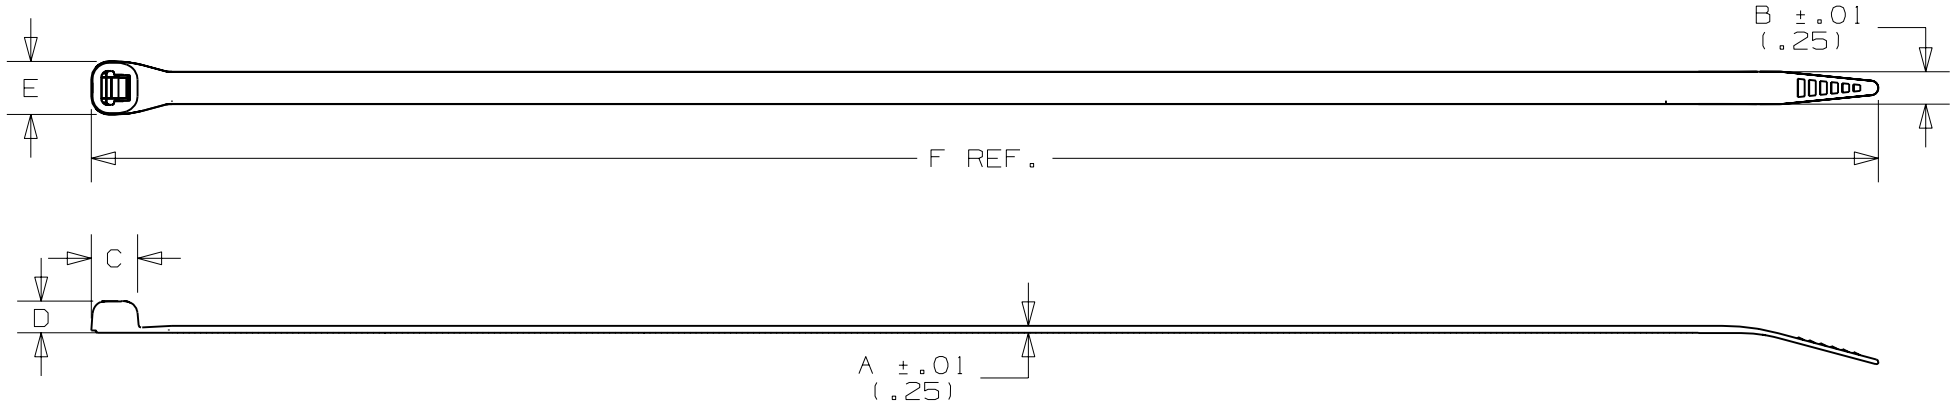

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT 100 pcs lbs (g)
	MIN. in (mm)	MAX. in (mm)									
SG200S	.06 (1.5)	2.0 (51)	.046 (1.2)	.225 (5.7)	.290 (7.4)	.220 (5.6)	.342 (8.7)	8.3 (210.8)	50 (222)	STANDARD	.30 (137)
SG250S	.16 (4.1)	2.6 (66)	.050 (1.3)	.225 (5.7)	.318 (8.1)	.220 (5.6)	.360 (9.1)	10.4 (264.2)	70 (311)	STANDARD	.41 (186)
SG300S	.16 (4.1)	3.2 (81)	.050 (1.3)	.225 (5.7)	.318 (8.1)	.220 (5.6)	.360 (9.1)	12.4 (315.0)	70 (311)	STANDARD	.49 (220)
SG370S	.16 (4.1)	4.2 (107)	.052 (1.3)	.225 (5.7)	.330 (8.4)	.220 (5.6)	.360 (9.1)	15.3 (388.6)	70 (311)	STANDARD	.61 (278)

**NOTE:**

1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE & PART COLOR.

										DIMENSIONS IN PARENTHESIS ARE IN METRIC UNITS		
										PANDUIT CORP. TINLEY PARK, ILLINOIS		
										SUPER-GRIP CABLE TIES		
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± .020(.5) (.XX) ± .02(.5) ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
1	3/03/06	FAB		ADDED SG370S	27441	1				DRAWN BY JABO DATE 4/28/05 CHK'D BOBK MAT'L; NYLON 6.6	SCALE NONE	
R	4/28/05	JABO	BOBK	DRAWING RELEASED	27441	R	TGS				DRAWING NO. SS-27441	DWG A
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP			SHEET 2 OF 3	SIZE