


GROMMETS & BUSHINGS, LED SPACERS AND INSULATORS



SCH-2/SCHS-2

STANDING CAPACITOR HOLDER

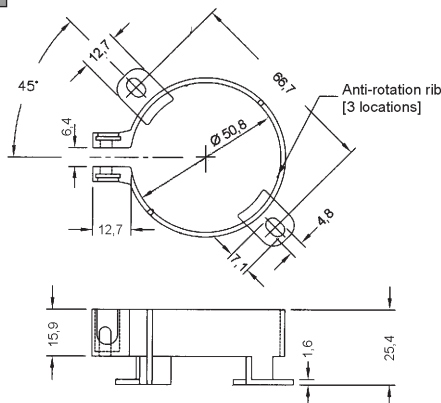

Part No.	Spacer to elevate capacitor mm	Description
SCHS-2	2.4	without hardware
SCH-2	1.6	without hardware
SCHS-2H	2.4	with clamping hardware: Screws ähn. DIN 7997 1 3.5x19.0
SCH-2H	1.6	with clamping hardware: Screws ähn. DIN 7997 1 3.5x19.0

Note:


SCH	2	H
Part	Type	Type

Material: Glass filled Nylon 6/6 - black;
UL 94 HB, RMS-35
Std. Pk.: 100 pcs.



SHC

SNAP-IT HOSE CLAMPS

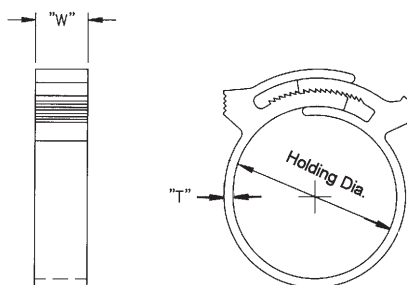

Part No.	Holding Dia. Range	"T" mm	"W" mm	Standard RMS
SHC-16	6.4 - 7.9	1.5	3.3	35
SHC-23	9.1 - 9.9	1.8	5.6	01
SHC-26	9.9 - 11.9			
SHC-30	11.9 - 13.5			
SHC-32	13.5 - 15.1			
SHC-38	15.1 - 16.7			
SHC-44	17.5 - 20.6			
SHC-50	19.1 - 22.2			
SHC-56	22.2 - 25.4			
SHC-62	24.2 - 27.8		7.9	
SHC-68	26.2 - 30.2			
SHC-80	31.8 - 36.5			
SHC-92	35.7 - 41.3			
SHC-104	40.5 - 46.0		9.1	
SHC-114	43.3 - 51.6			
SHC-124	47.6 - 54.0			
SHC-134	54.0 - 60.3	10.2		

Patent No. 4.128.9128

Material: Nylon 6/6 - white; UL 94 V-2, RMS-01
or
Nylon 6/6 - black; UL 94 V-2, RMS-01
by special order:
Glass filled Nylon - white, UL 94 HB, RMS-35
Glass filled Nylon - black, UL 94 HB, RMS-35
except: Type SHC-16
This part is only available in RMS-35
Std. Pk.: 100 pcs.

Note:



SHC	16	B
Part	Type	Colour

Part No.	"D" mm Dia. to be held	"A" mm ref	"B" ± 0.4 mm	"C" ± 0.25 mm	"E" ± 0.25 mm	"F" mm ref
VM-1002	9.5	11.2	12.7	2.8	Single hole in centre	13.7
VM-1004	12.7	13.2				19.1
VM-1007	17.5	19.8				20.8
VM-1008	19.1	24.6				24.9
VM-1010	25.4	26.1	28.4	3.8	19.1	31.8
VM-1011	34.9	38.4	29.5			34.8
VM-1024	38.1	42.4	43.2			38.1
VM-1030	57.2	63.5	38.6			76.2



VM

COMPONENT CLIP, MOULDED

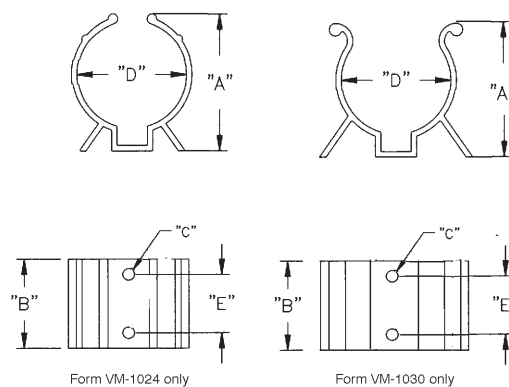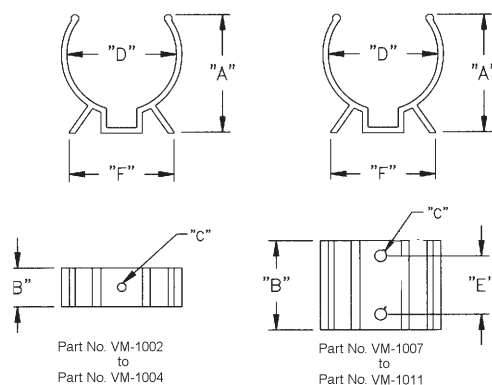

Material: Glass filled Nylon - black;
UL 94 V-2, RMS-37
Std. Pk.: 100 pcs.

Note:

VM	1002
Part	Type

A Touch of Magic!




GROMMETS & BUSHINGS, LED SPACERS AND INSULATORS




V

COMPONENT CLIPS & MICROPHONE CLIP


Part No.	"D" mm	"L" mm	"A" mm ref	"B" mm ref	"C" mm	"E" mm	"F" mm ref	"G" mm ref	"H" mm ref	Wall thickness	Style	Std. Pk.
V-1000	6.4	12.7 ± 0.4	7.5	1.0	2.4	Single hole in center	12.7	4.8	4.8	1.0	1	1.000
V-1001	7.9		9.1	1.5					6.4	1.1		
V-1002	9.5		10.3						7.4			
V-1003	11.1		11.5						9.1			
V-1004	12.7		12.7				16.7	5.6	8.6			
V-1005	14.3		15.5	18.3			9.7					
V-1006	15.9		15.9	21.0			6.4	10.9	1.5			
V-1007	17.5		15.9	1.0			21.3	8.6	10.7	1.7		
V-1008	19.1	19.8	3.0	22.6	13.5							
V-1009	22.2	23.0	1.5	19.1	27.4	14.2	2					
V-1010	25.4	28.6	25.0		3.0	28.6			17.8			
V-1011	34.9		34.1		4.8	31.8		10.4	23.1	1.9		
V-1024	38.1	44.5 ± 0.5	46.0			36.1	11.2	25.1				
V-1030	57.1 - 69.9	38.1 ± 0.5	61.9			66.3	12.7	35.1	2.4	3		
MC-2	22.2	27.9 ± 0.5	34.9		5.1	32.5	7.6	18.3	2.1			

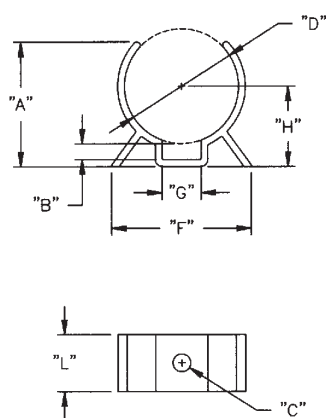

STYLE 1

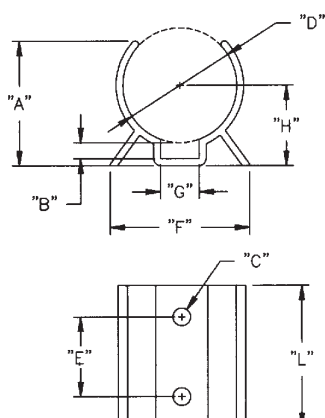

STYLE 2

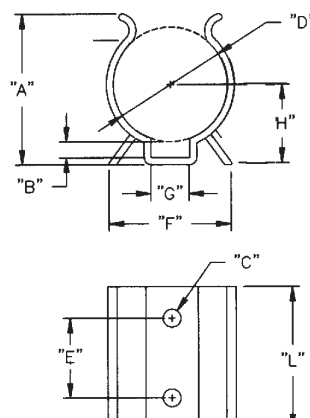

STYLE 3

Note:

V	1000
Part	Type

Material:

V-Series: PVC - black, UL 94 HB, RMS-04
MC-2: Polypropylene - black, UL 94 HB, RMS-08
Std. Pk.: see table