

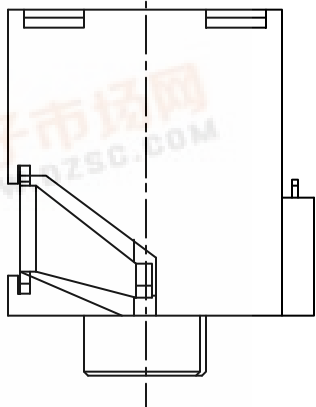
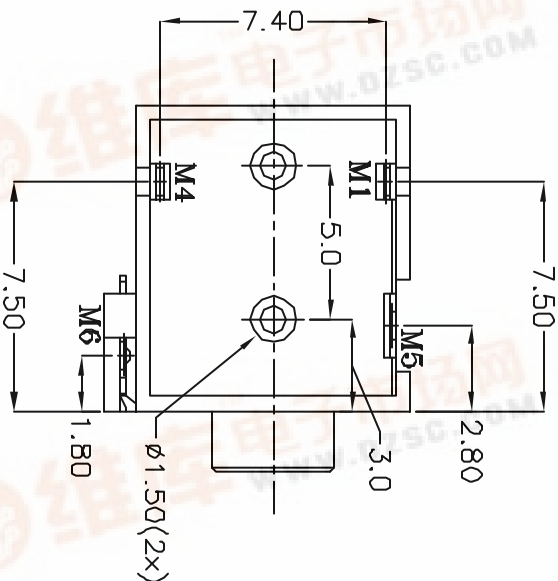
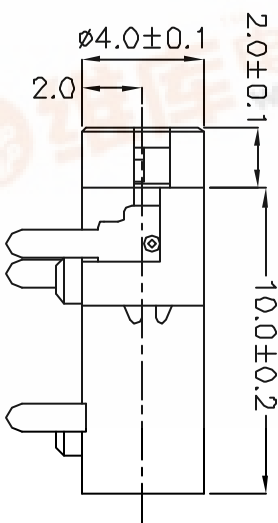
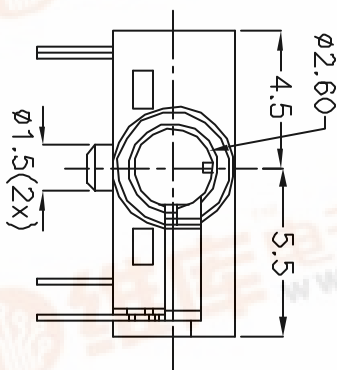


Specifications
Rated Voltage: 16VDC
Rated Current: 300mA
Contact Resistance: 100 mOHMS or less under all conditions including after life testing.
Insulation Resistance: 100 M OHMS or greater at 500VDC.
Dielectric Withstand Voltage: 250VAC RMS for 1 minute.
Life: 5,000 cycles min.



Bottom View

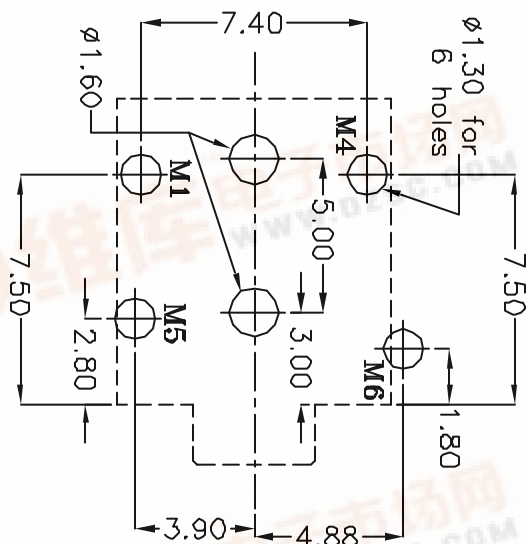

PC Board Layout
Top View

Item	Name	Material	Finish	Qty	Note
6	Ground(M6)	PBS	Au	1	30T
5	Extra Ring(M5)	PBS	Au	1	30T
4	Tip Contact(M4)	Ti-Cu	Au	1	20T
3	Ring Contact(M1)	Ti-Cu	Au	1	20T
2	Cover(P2-ST)	Py6T		1	UL-94
1	Housing(P1-LCP)	LCP		1	UL-94



9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

2.5mm Audio Jack w/4 Connectors

PART NO.

SJ-42514

UNITS:

Millimeters

DRAWN BY:

Todd R. White

APPROVED BY:

SCALE 4

PC FILE NAME:
SJ-42514.dwg

COPYRIGHT 2000 BY CUI INC.

捷多邦, 专业PCB打样工厂, 24小时加急出货

查询SJ-42514供应商