



## GENERAL DESCRIPTION

The SM5162 is a RF remote control encoder paired with SM5172. It utilizes CMOS technology. The chip has 12 bits of 3-state address pins that provides 3<sup>12</sup> codes. SM5162/ SM5172 pair is suitable for use on remote controller.


## FEATURES

- \* CMOS technology
- \* Low power consumption
- \* 12 tri-state pins
- \* Wide range operating voltage, V<sub>cc</sub> = 3- 12V
- \* Up to six data bits
- \* High noise immunity


## APPLICATIONS

- \* Car Security
- \* Garage Door
- \* Ceiling Fan
- \* Home Security/Automatic
- \* Toys


## PIN ASSIGNMENTS

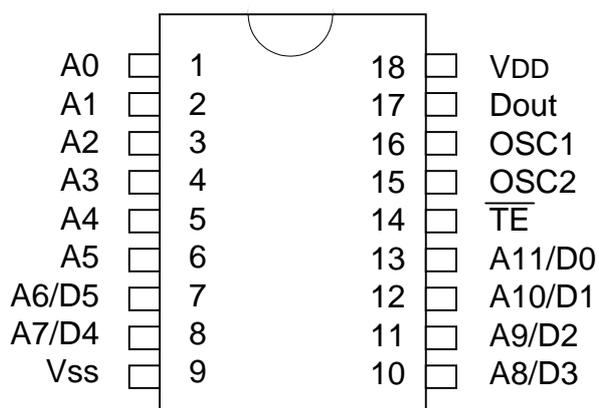


**SM5162**

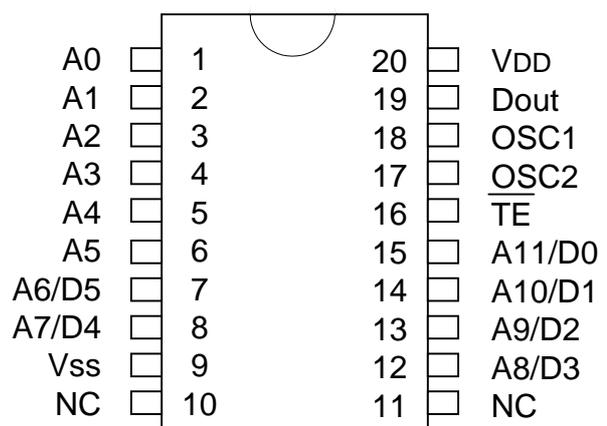

**SM5162S**

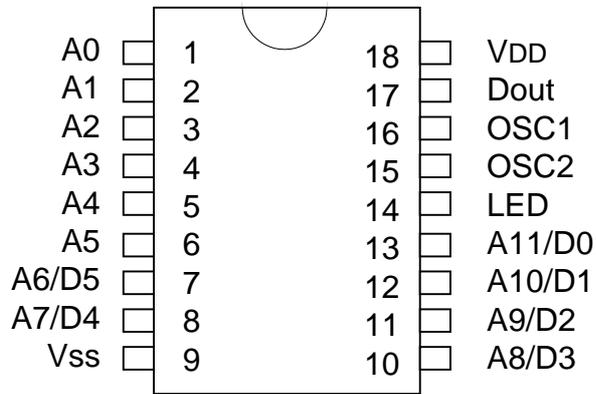


**SM5162-DX**

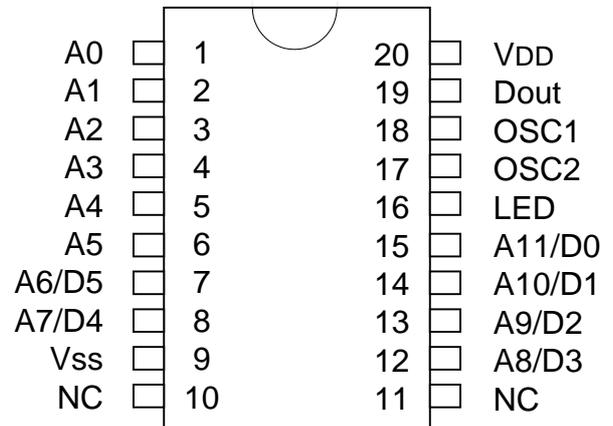

**SM5162S-DX**

## BLOCK DIAGRAM

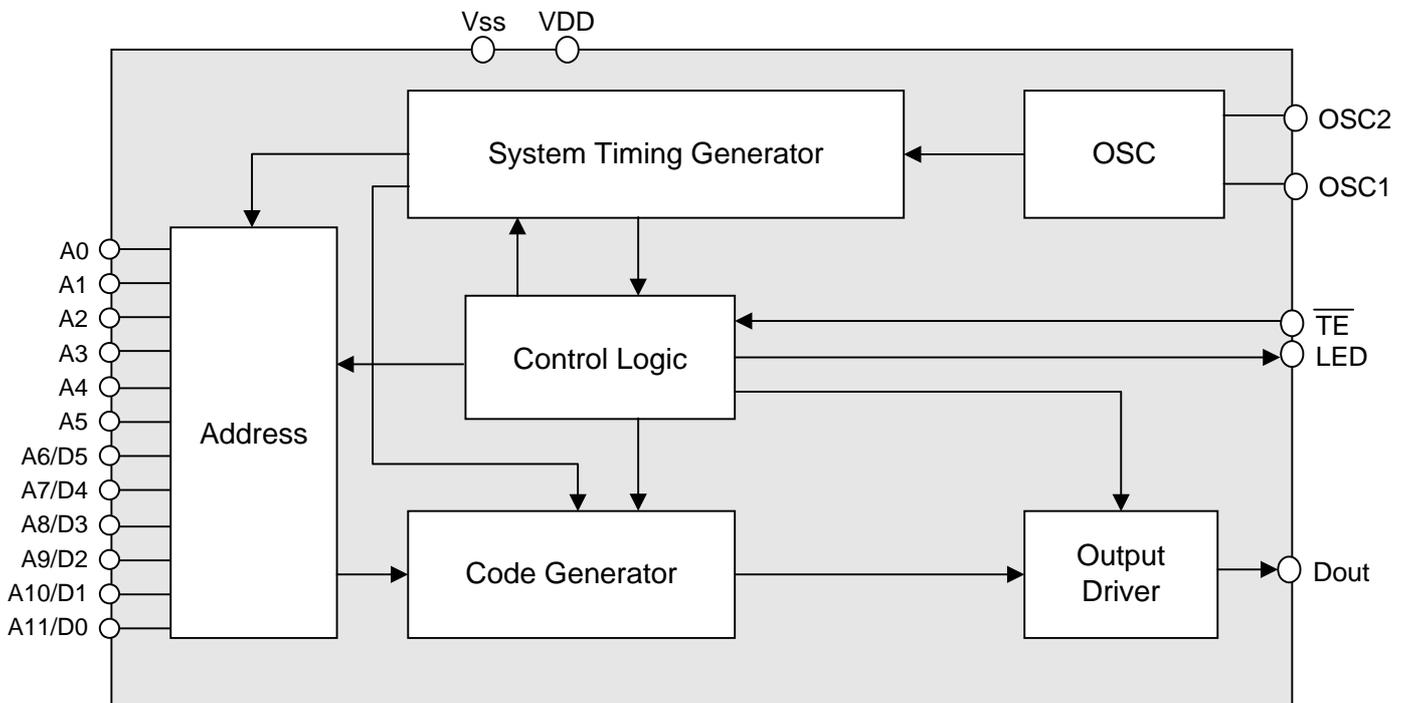




## PIN FUNCTION

No.	Pin Name	I/O	Function Operation
1	A0	I	Address input, each pin can be set to "0", "1", or floating.
2	A1	I	
3	A2	I	
4	A3	I	
5	A4	I	
6	A5	I	
7	A6/D5	I/O	Address input or data output.
8	A7/D4	I/O	
9	VSS	POWER	Negative power supply.
10	A8/D3	I/O	Address input or data output.
11	A9/D2	I/O	
12	A10/D1	I/O	
13	A11/D0	I/O	
14	$\overline{\text{TE}}$	I	Enables transmission.
	LED	O	LED Output.
15	OSC1	I	Resistor connected between these two pins determine the system clock.
16	OSC2	O	
17	Dout	O	Serial output of encoded signals.
18	VDD	POWER	Positive power supply.




## FUNCTION DESCRIPTION

### 1. Data Format

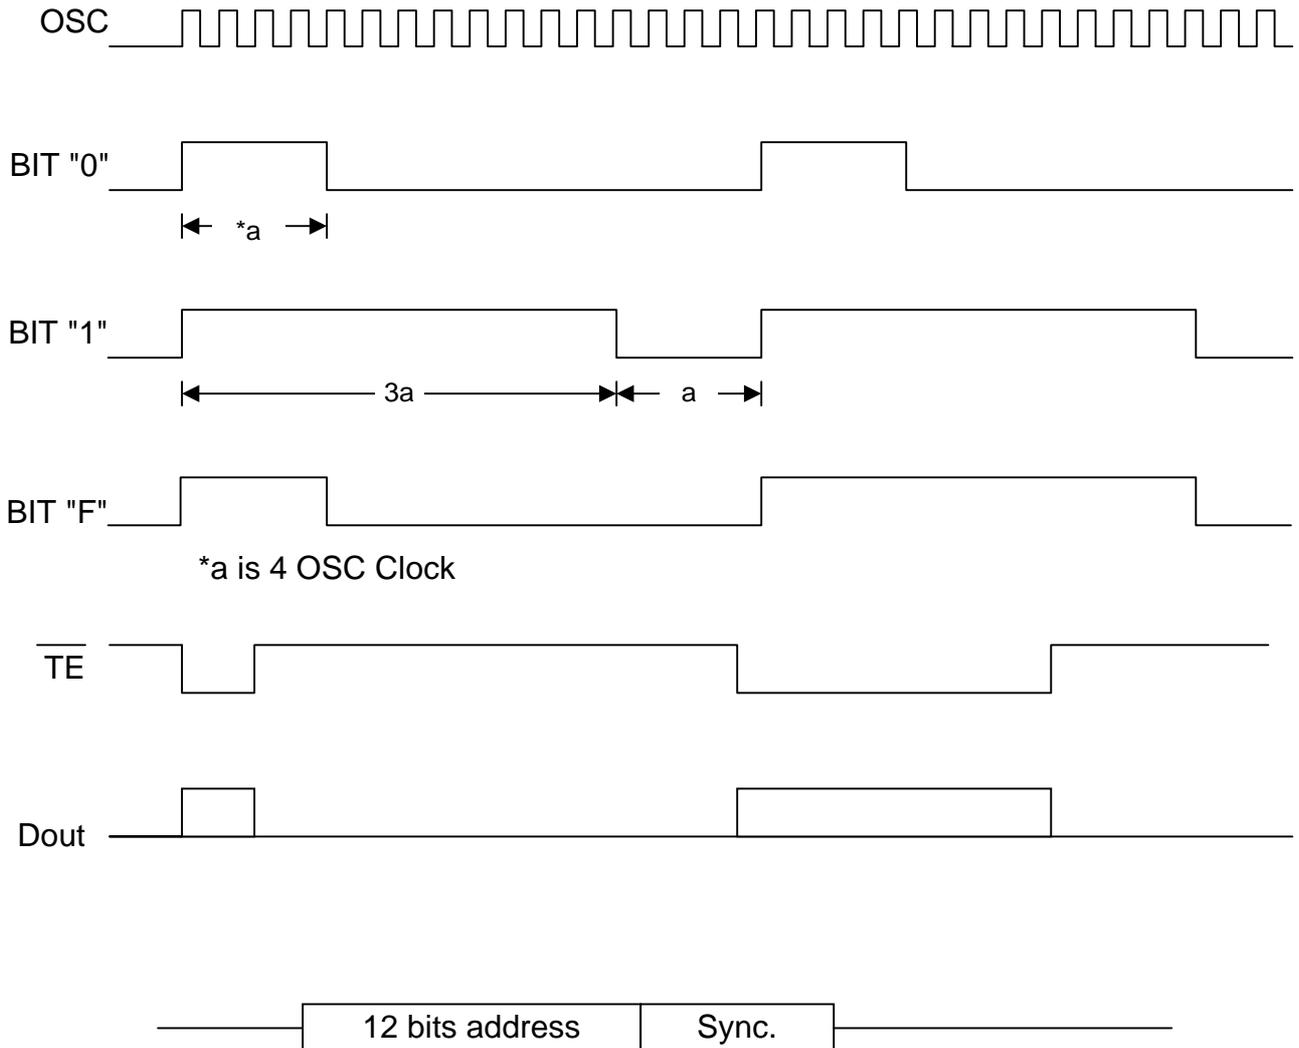


Synchronisation Bit waveform is :

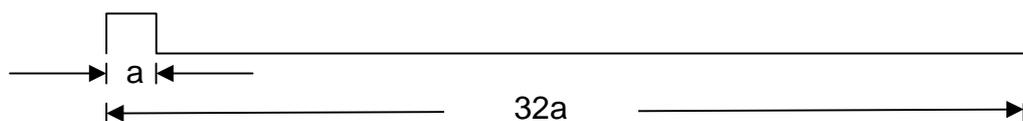




## 2. Frame Format


When SM5162 is used for no data, transmitting format is :




Synchronisation Bit waveform is :

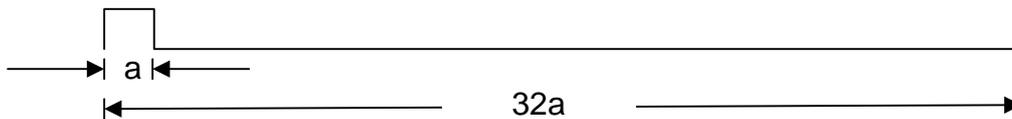

When data type of SM5162 is used, address bits will decrease accordingly. For example, in 3 data type where address is 9 bits, transmitting format is :



SM5162/SM5172 has 12 bits including a maximum of 6 data bits.

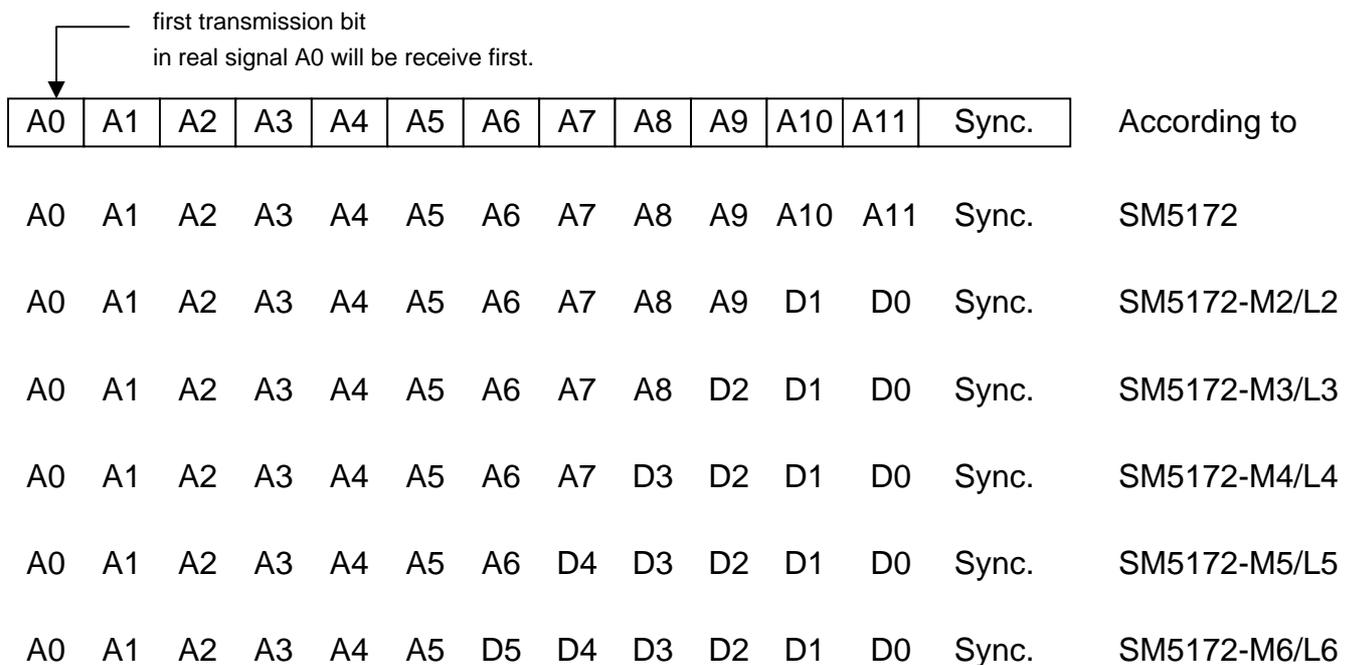





### Single Resistor Oscillator

SM5162's oscillator be constructed by connecting a resistor between OSC1 and OSC2 pin.  
SM5172's OSC frequency must be 1.8 to 5.8 times more than SM5162.

Encoder OSC Frequency

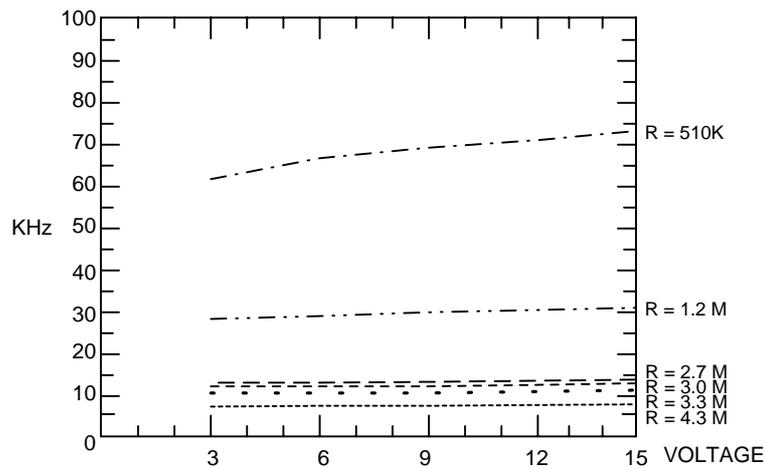

Dncoder OSC Frequency

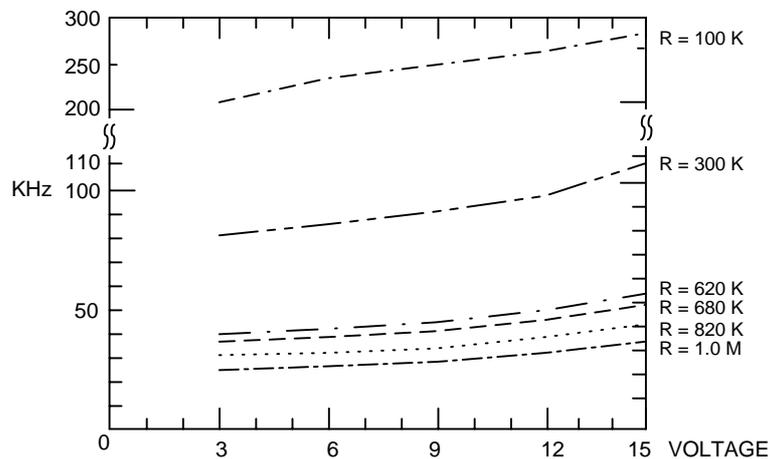

Suggested oscillator resistor of SM5162/ SM5172:

SM5162	SM5172
4.7M OHM	820K OHM
3.0M OHM	620K OHM
2.2M OHM	300K OHM
1.2M OHM	180K OHM



### ABSOLUTE MAXIMUM RATINGS



Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	VDD - Vss		-0.3 ~ 16	V
Input Voltage	Vi - Vss		Vss - 0.3 ~ VDD +0.3	V
Output Voltage	Vo - Vss		Vss - 0.3 ~ VDD +0.3	V
Maximum power dissipation	Pa	VDD - Vss = 12 V	500	mW
Operating Temperature	Topr		-20 ~ 70	
Storage Temperature	Tstg		-40 ~ 125	

### DC ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Limit			Unit
			Min.	Typ.	Max.	
Supply Voltage	VCC		3		12	V
Standby Current	ISTB	VDD=12V OSC stop AO - A11 open		0.02	0.3	μA
Output Drive Current (Dout)	IOH	VDD = 5V VOH = 4V VDD = 8V VOH = 6.4V VDD = 12V VOH = 9.6V	- 2 - 6 -14			mA
Output Sinking Current (Dout)	IOL	VDD = 5V VOL = 1V VDD = 8V VOL = 1.6V VDD = 12V VOL = 2.4V	5 13 23			mA




**APPLICATION CIRCUIT**

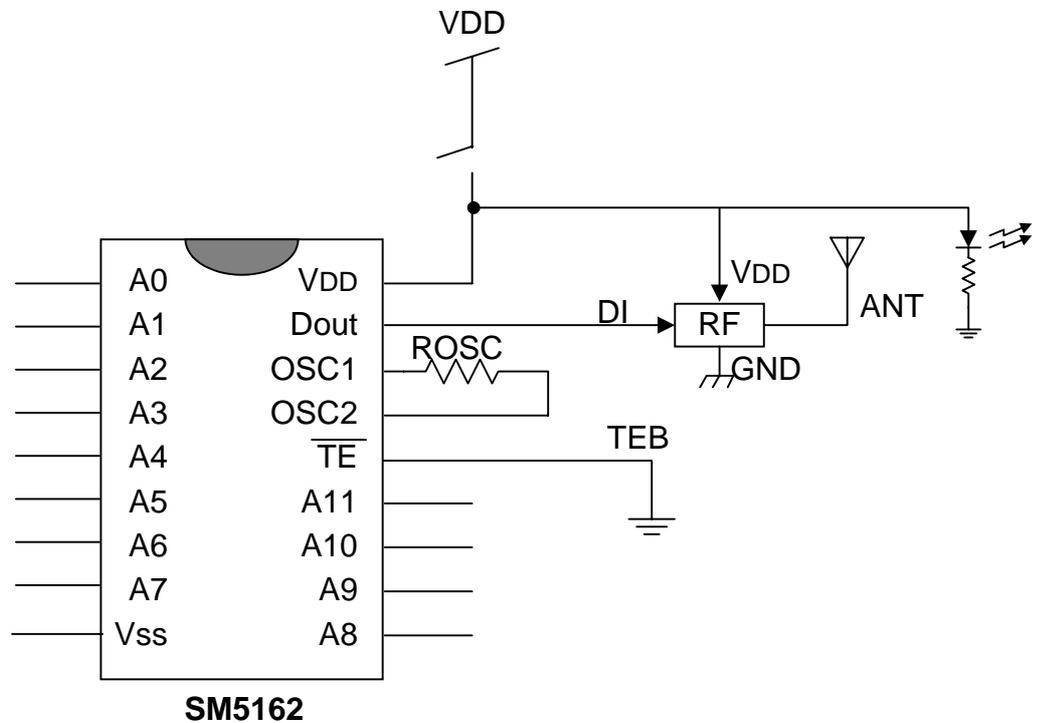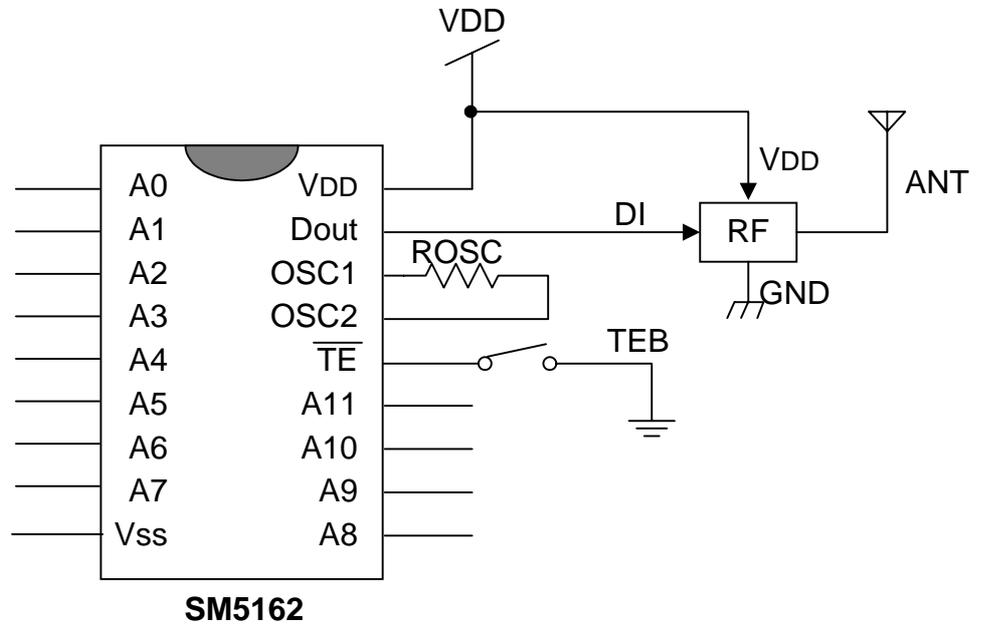

RF : Module reference to Page11




APPLICATION CIRCUIT

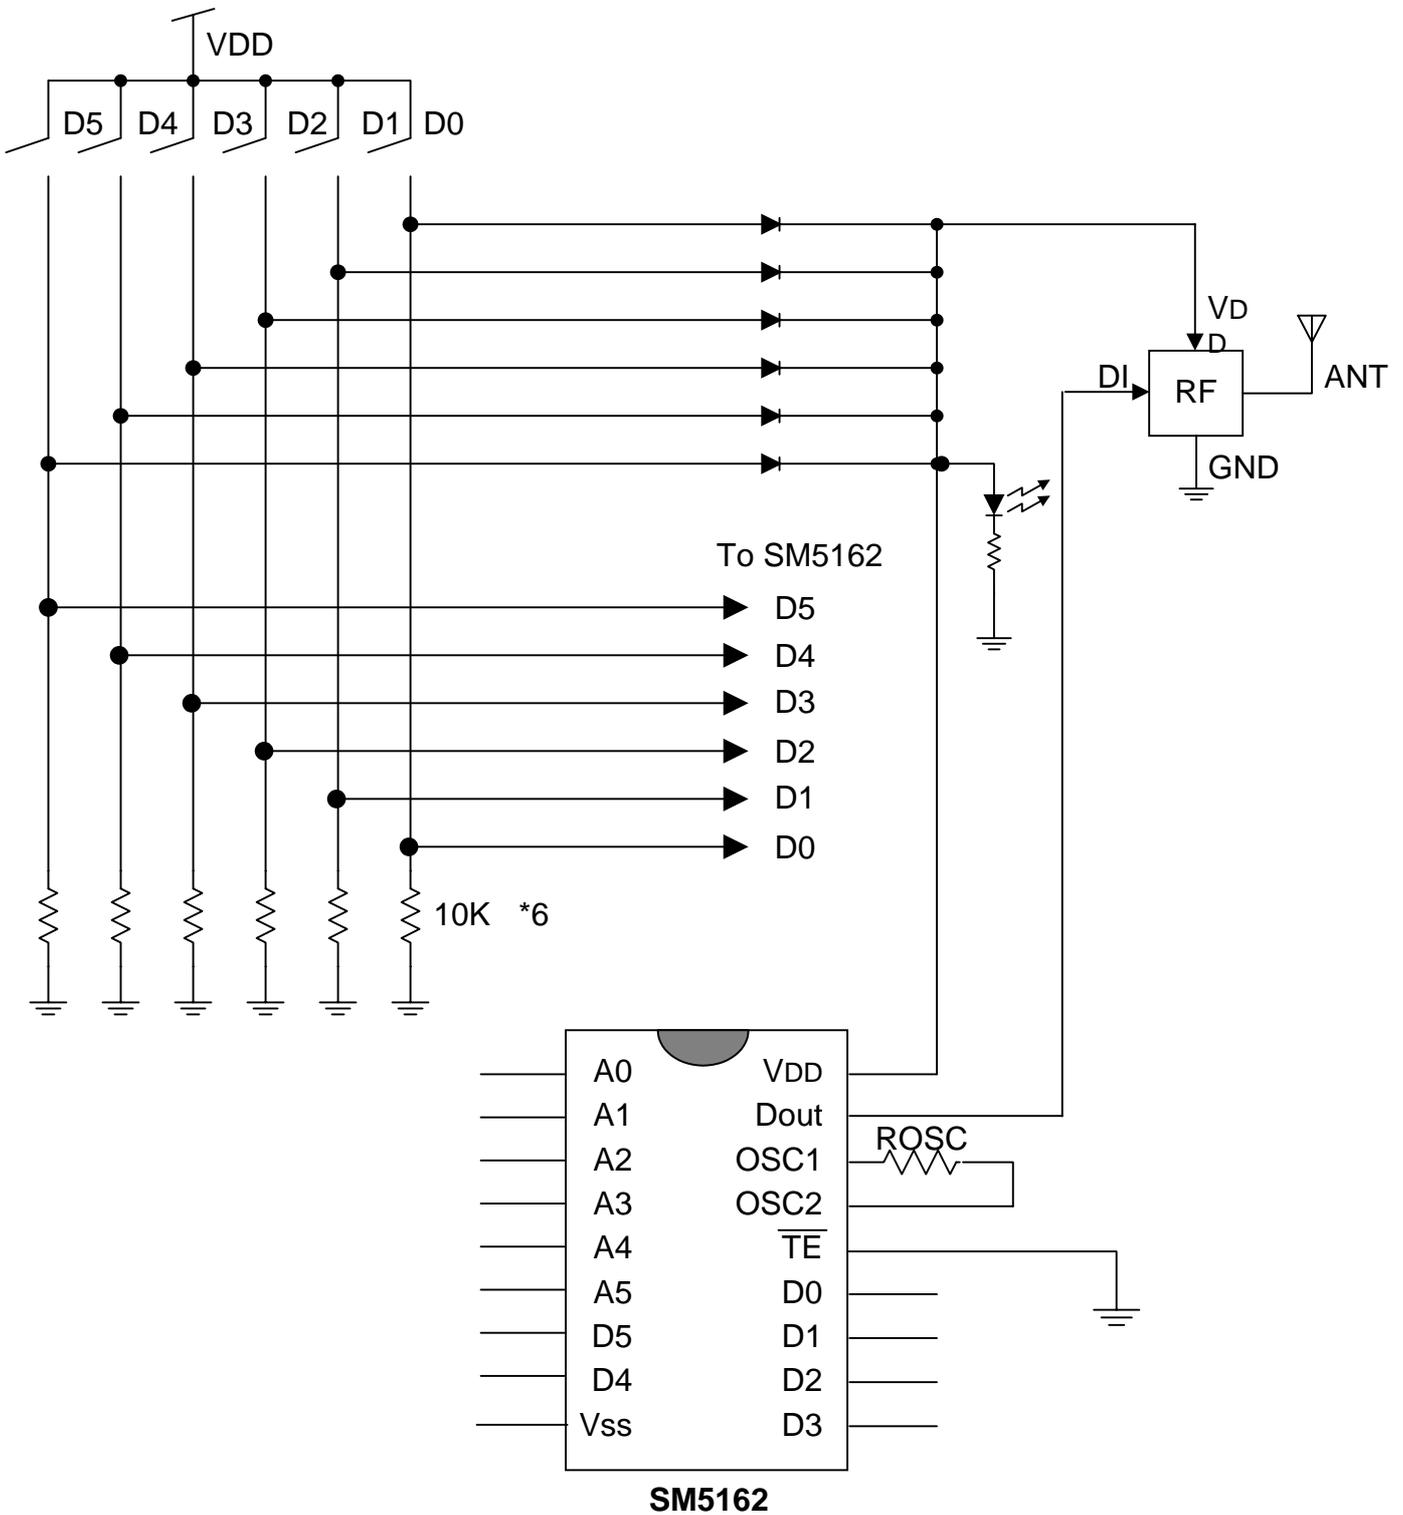




**APPLICATION CIRCUIT**

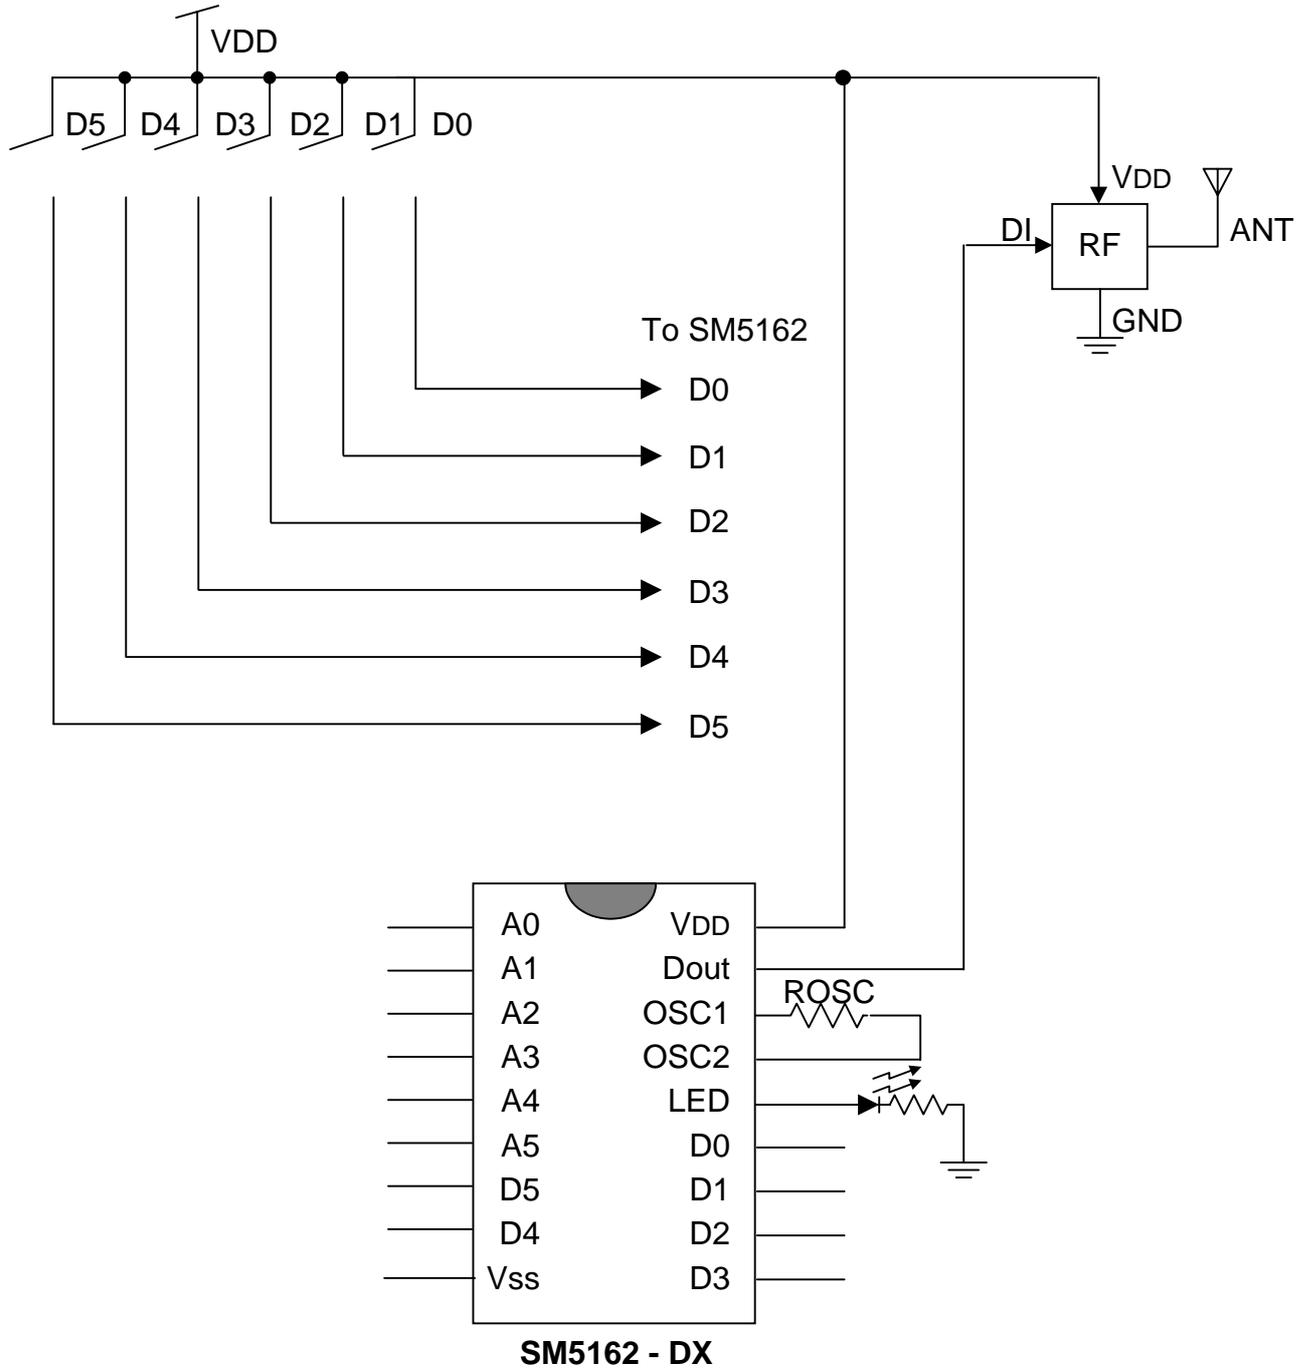



**APPLICATION CIRCUIT**

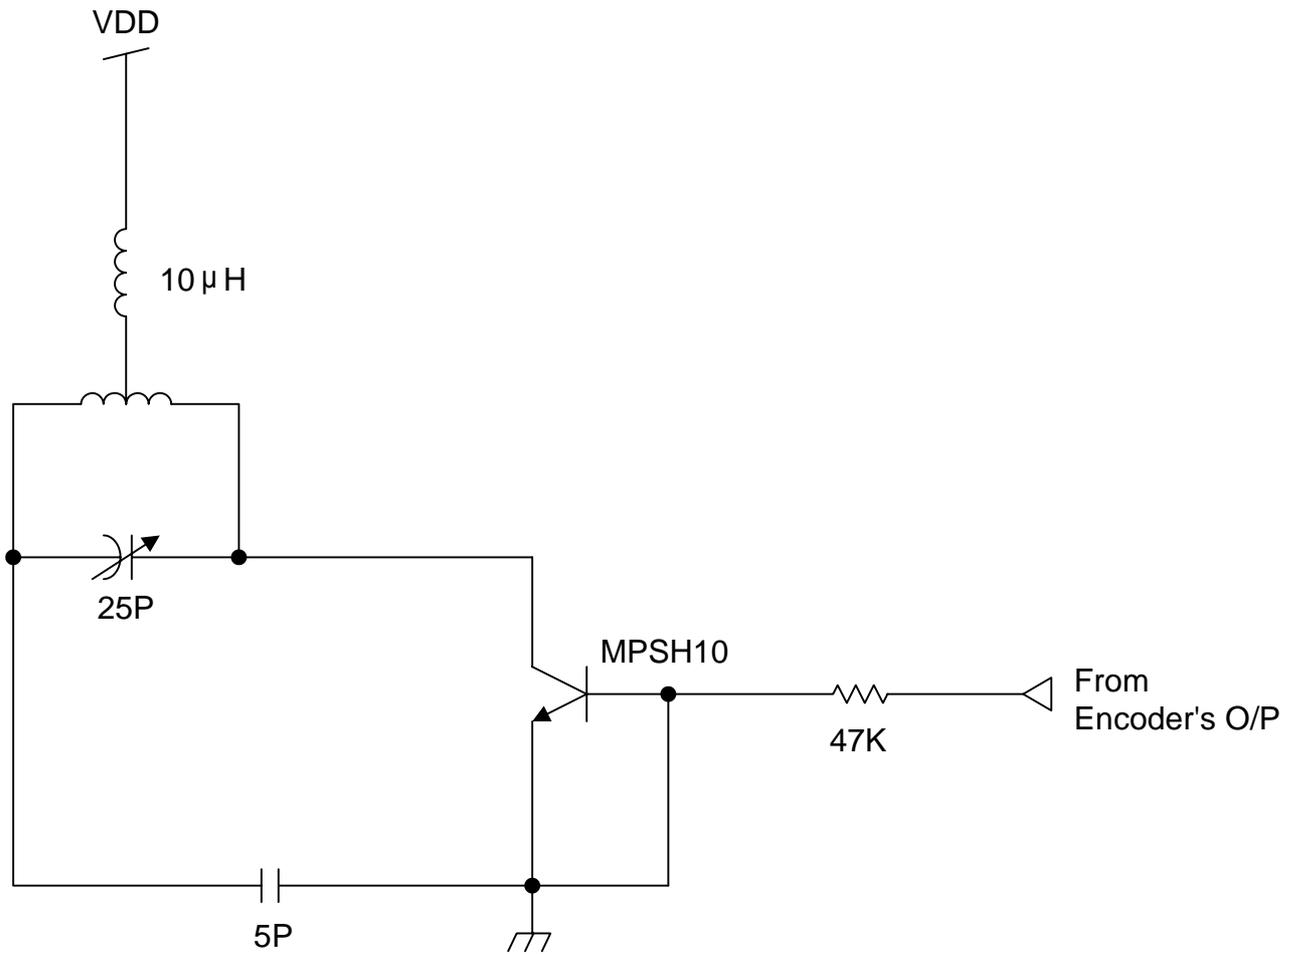




## ORDERING INFORMATION

Part No.	Package
SM5162	18 Pin DIP

Part No.	Package
SM5162S	20 Pin SOP

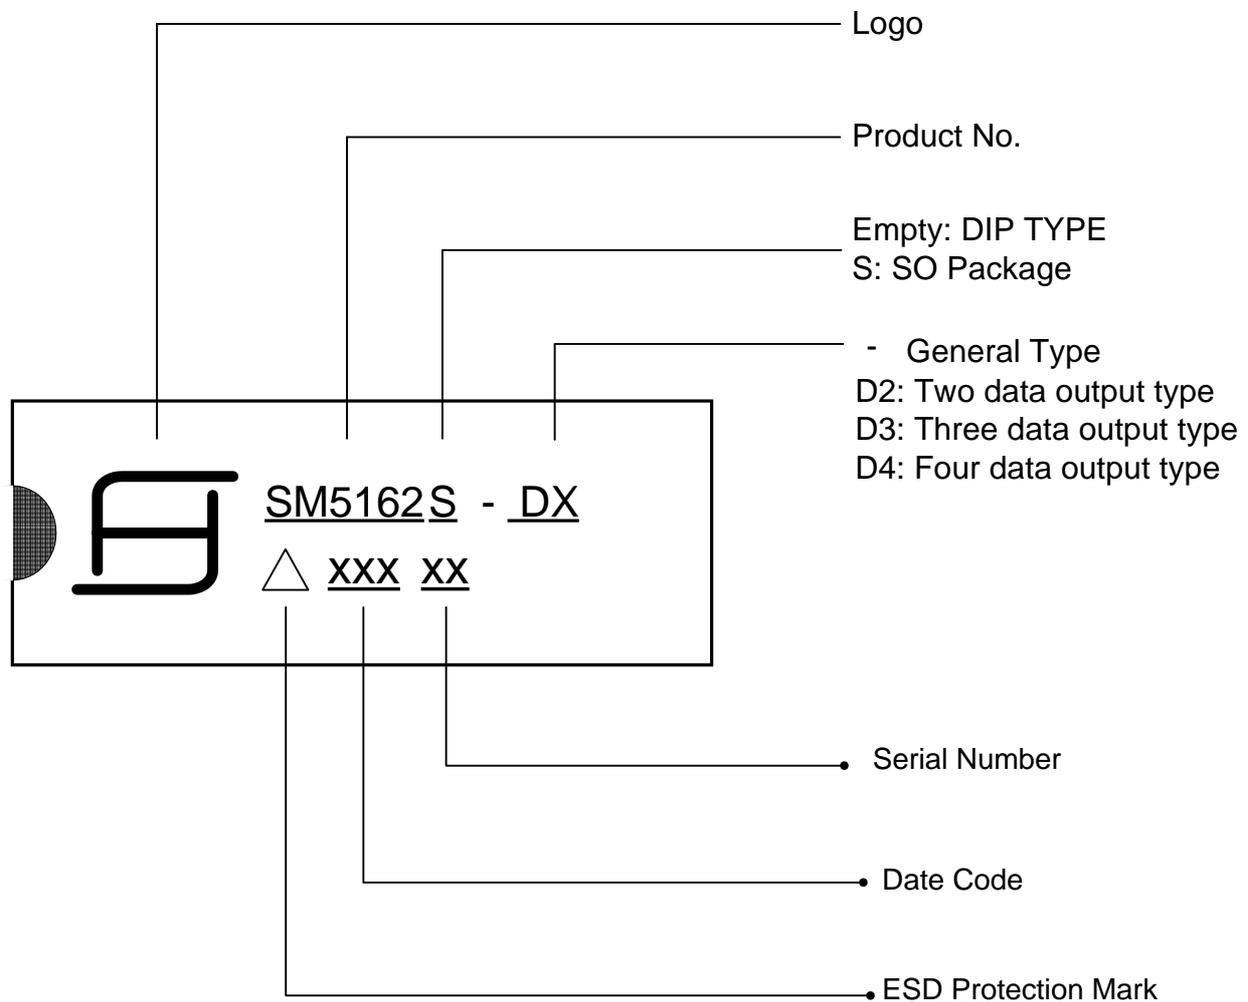

Copyright Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

[www.AllDataSheet.com](http://www.AllDataSheet.com)

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

[www.AllDataSheet.com](http://www.AllDataSheet.com)