查询SPD30P06P供应商 捷多邦，专业PCB打样工厂，24小时加急出货

SIPMOS® Power-Transistor

Features

- P-Channel
- Enhancement mode
- Avalanche rated
- d*v*/d*t* rated
- 175°C operating temperature

Product Summary

Drain source voltage	V_{DS}	-60	V
Drain-source on-state resistance	$R_{DS(on)}$	0.075	Ω
Continuous drain current	I_D	-30	A

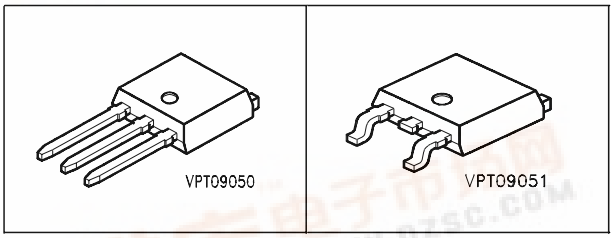

Type	Package	Ordering Code
SPD30P06P	P-TO252	Q67042-S4018
SPU30P06P	P-TO251	Q67042-S4019

Pin 1	PIN 2/4	PIN 3
G	D	S

Maximum Ratings,at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current T_C = 25 °C T_C = 100 °C	I_D	 -30 -21.5	A
Pulsed drain current T_C = 25 °C	$I_{D\ puls}$	-120	
Avalanche energy, single pulse I_D = -30 A , V_{DD} = -25 V, R_{GS} = 25 Ω	E_{AS}	250	mJ
Avalanche energy, periodic limited by T_{jmax}	E_{AR}	12.5	
Reverse diode d*v*/d*t* I_S = -30 A, V_{DS} = -48 V, d*i*/d*t* = 200 A/µs, T_{jmax} = 175 °C	d*v*/d*t*	6	kV/µs
Gate source voltage	V_{GS}	±20	V
Power dissipation T_C = 25 °C	P_{tot}	125	W
Operating and storage temperature	T_j , T_{stg}	-55...+175	°C
IEC climatic category; DIN IEC 68-1		55/175/56	

找PDF 维库一下 pdf.dzsc.com

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-	-	1.2	K/W
Thermal resistance, junction - ambient, leaded	R_{thJA}	-	-	100	
SMD version, device on PCB:	R_{thJA}				
@ min. footprint		-	-	75	
@ 6 cm^2 cooling area [1)]		-	-	50	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage V_{GS} = 0 V, I_D = -250 µA	$V_{(BR)DSS}$	-60	-	-	V
Gate threshold voltage, V_{GS} = V_{DS} I_D = -1.7 mA	$V_{GS(th)}$	-2.1	-3	-4	
Zero gate voltage drain current	I_{DSS}				µA
V_{DS} = -60 V, V_{GS} = 0 V, T_j = 25 °C		-	-0.1	-1	
V_{DS} = -60 V, V_{GS} = 0 V, T_j = 150 °C		-	-10	-100	
Gate-source leakage current V_{GS} = -20 V, V_{DS} = 0 V	I_{GSS}	-	-10	-100	nA
Drain-source on-state resistance V_{GS} = -10 V, I_D = -21.5 A	$R_{DS(on)}$	-	0.069	0.075	Ω

[1]Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6cm^2 (one layer, 70 µm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 * I_D * R_{DS(on)max}$, I_D = -21.5 A	g_{fs}	5.2	10.4	-	S
Input capacitance V_{GS} = 0 V, V_{DS} = -25 V, f = 1 MHz	C_{iss}	-	1228	1535	pF
Output capacitance V_{GS} = 0 V, V_{DS} = -25 V, f = 1 MHz	C_{oss}	-	387	383	
Reverse transfer capacitance V_{GS} = 0 V, V_{DS} = -25 V, f = 1 MHz	C_{rss}	-	142	177	
Turn-on delay time V_{DD} = -30 V, V_{GS} = -10 V, I_D = -21.5 A, R_G = 1.6 Ω	$t_{d(on)}$	-	13	19.5	ns
Rise time V_{DD} = -30 V, V_{GS} = -10 V, I_D = -21.5 A, R_G = 1.6 Ω	t_r	-	11	16.5	
Turn-off delay time V_{DD} = -30 V, V_{GS} = -10 V, I_D = -21.5 A, R_G = 1.6 Ω	$t_{d(off)}$	-	30	45	
Fall time V_{DD} = -30 V, V_{GS} = -10 V, I_D = -21.5 A, R_G = 1.6 Ω	t_f	-	20	30	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Gate to source charge V_{DD} = -48 V, I_D = -30 A	Q_{gs}	-	3.7	5.6	nC
Gate to drain charge V_{DD} = -48 V, I_D = -30 A	Q_{gd}	-	13.8	20.7	
Gate charge total V_{DD} = -48 V, I_D = -30 A, V_{GS} = 0 to -10 V	Q_g	-	32	48	
Gate plateau voltage V_{DD} = -48 V , I_D = -30 A	$V_{(plateau)}$	-	-5.2	-	V

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Reverse Diode					
Inverse diode continuous forward current T_C = 25 °C	I_S	-	-	-30	A
Inverse diode direct current,pulsed T_C = 25 °C	I_{SM}	-	-	-120	
Inverse diode forward voltage V_{GS} = 0 V, I_F = -30	V_{SD}	-	-1.3	-1.7	V
Reverse recovery time V_R = -30 V, I_F=I_S , di_F/dt = 100 A/µs	t_{rr}	-	64.6	97	ns
Reverse recovery charge V_R = -30 V, I_F=I_S , di_F/dt = 100 A/µs	Q_{rr}	-	153	230	nC

Power dissipation

$P_{tot} = f(T_C)$

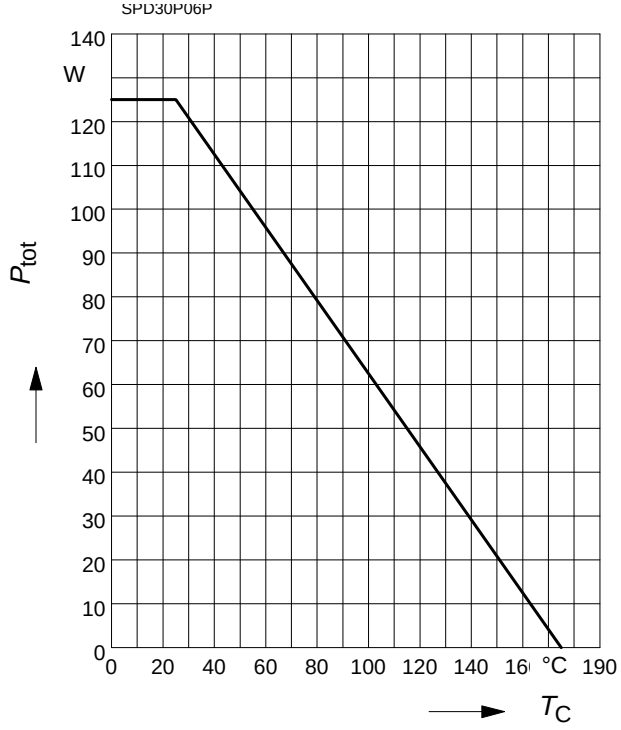

Drain current

$I_D = f(T_C)$

parameter: $V_{GS} \geq 10$ V

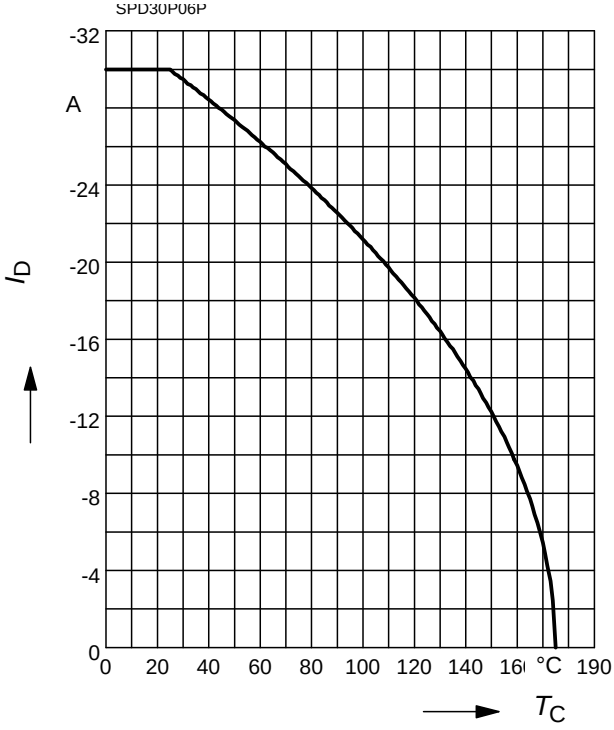

Safe operating area

$I_D = f(V_{DS})$

parameter : $D = 0$, $T_C = 25$ °C

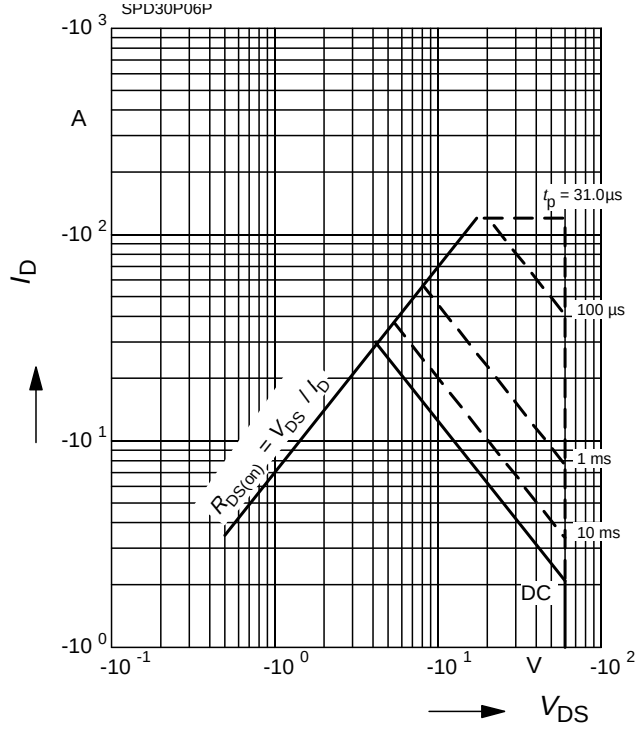

Transient thermal impedance

$Z_{thJC} = f(t_p)$

parameter : $D = t_p / T$

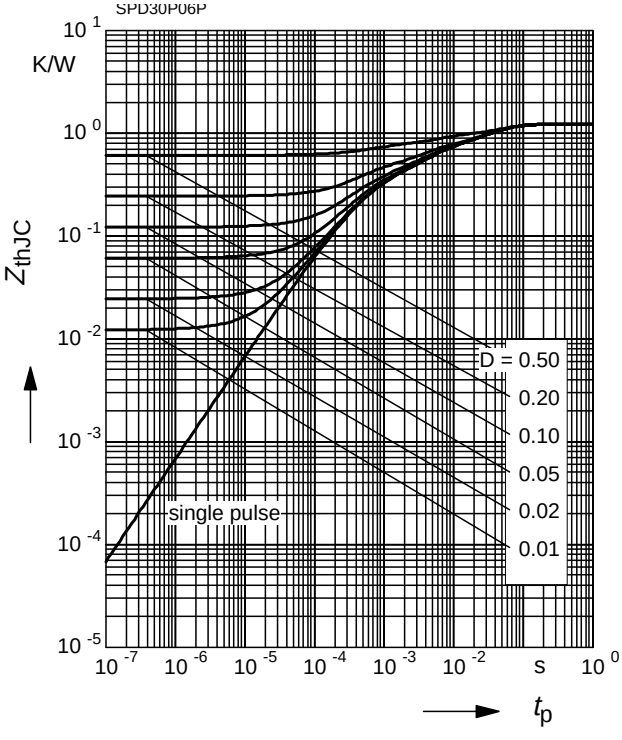

Typ. output characteristic

$I_D = f(V_{DS})$; T_j=25°C

parameter: t_p = 80 µs

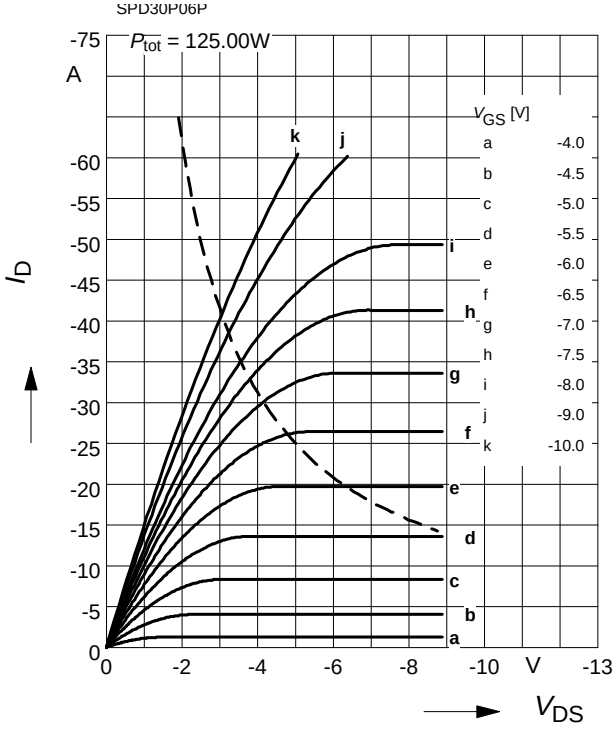

Typ. drain-source-on-resistance

$R_{DS(on)} = f(I_D)$

parameter: V_{GS}

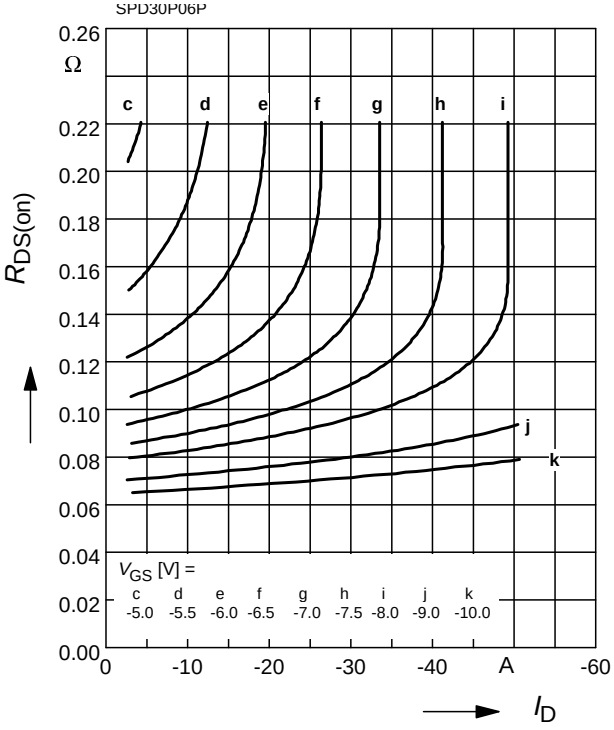

Typ. transfer characteristics $I_D = f(V_{GS})$

$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

parameter: t_p = 80 µs

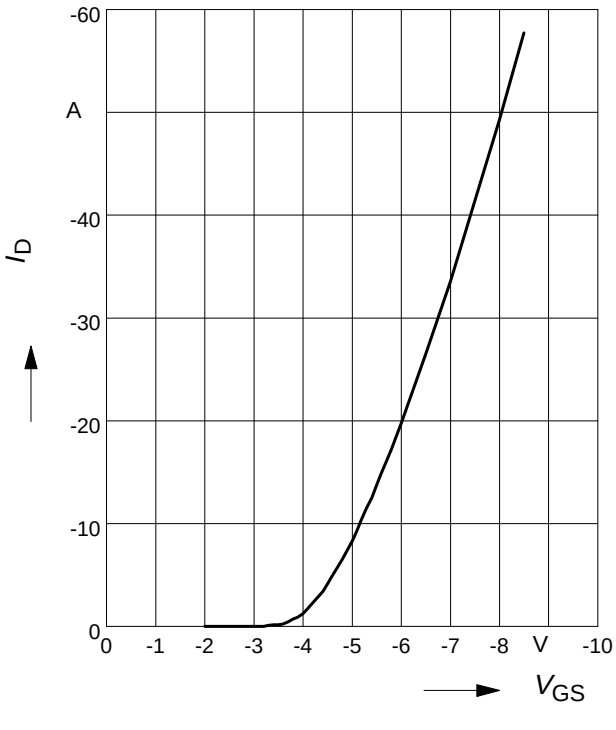

Typ. forward transconductance

g_{fs} = f(I_D); T_j=25°C

parameter: g_{fs}

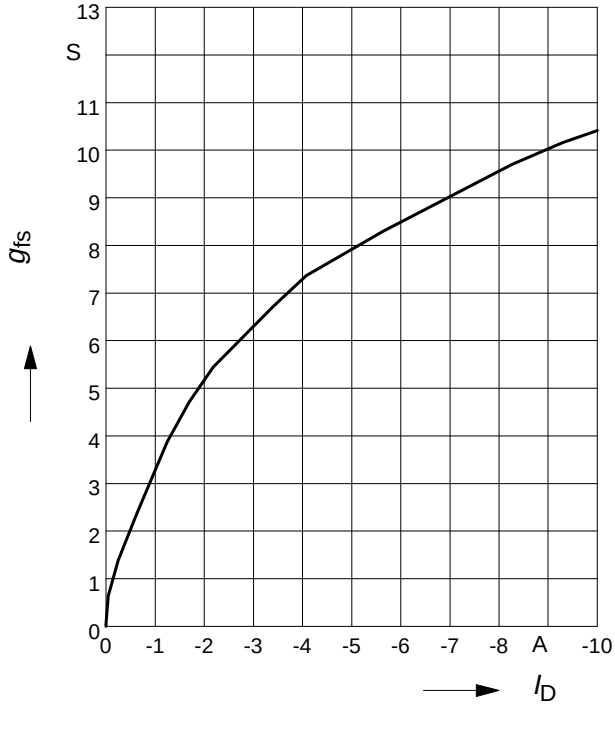

Drain-source on-state resistance

$R_{DS(on)} = f(T_j)$

parameter : I_D = -21.5 A, V_{GS} = -10 V

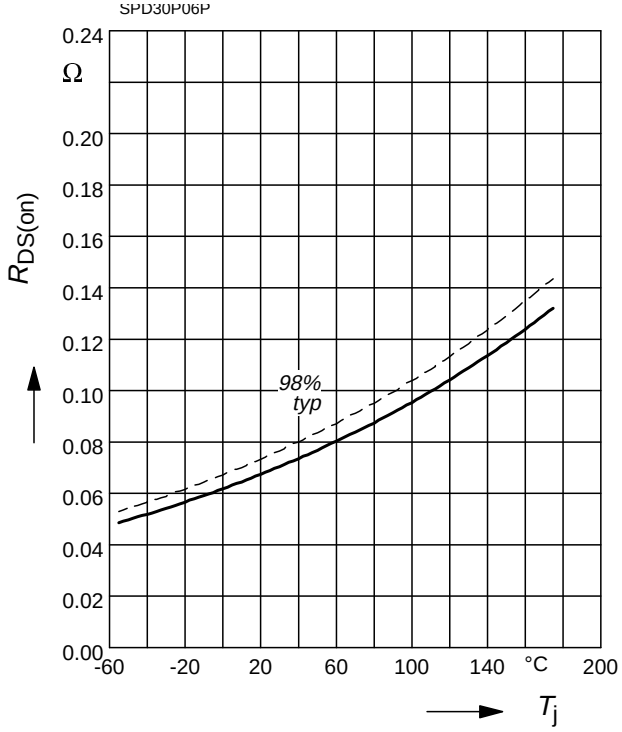

Gate threshold voltage

$V_{GS(th)} = f(T_j)$

parameter: $V_{GS} = V_{DS}$, I_D = -1.7 mA

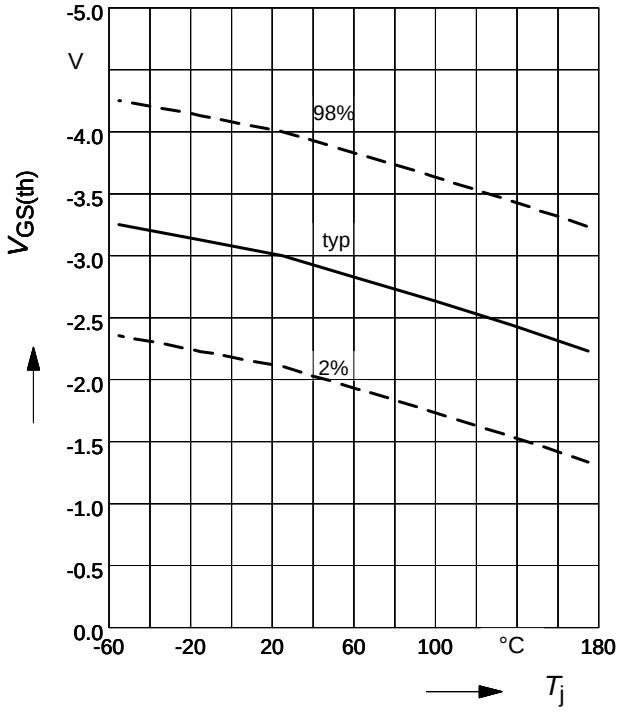

Typ. capacitances

$C = f(V_{DS})$

parameter: V_{GS}=0V, f=1 MHz

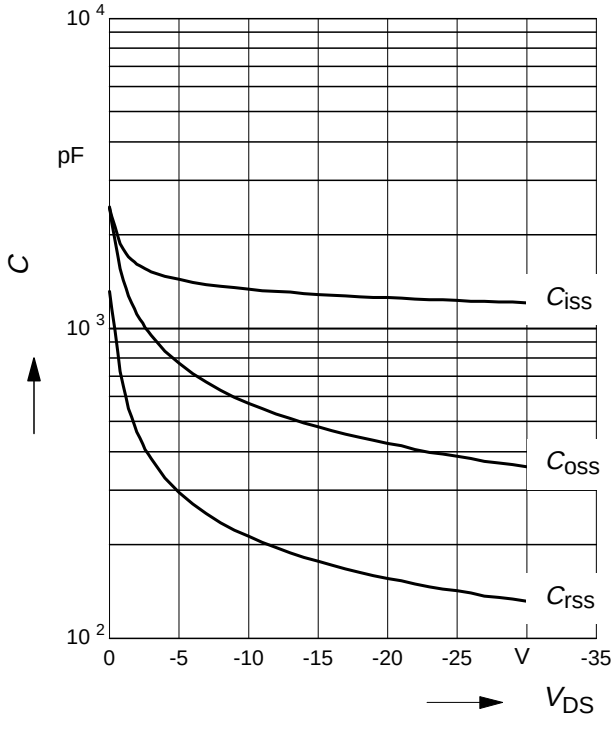

Forward characteristics of reverse diode

$I_F = f(V_{SD})$

parameter: T_j , tp = 80 µs

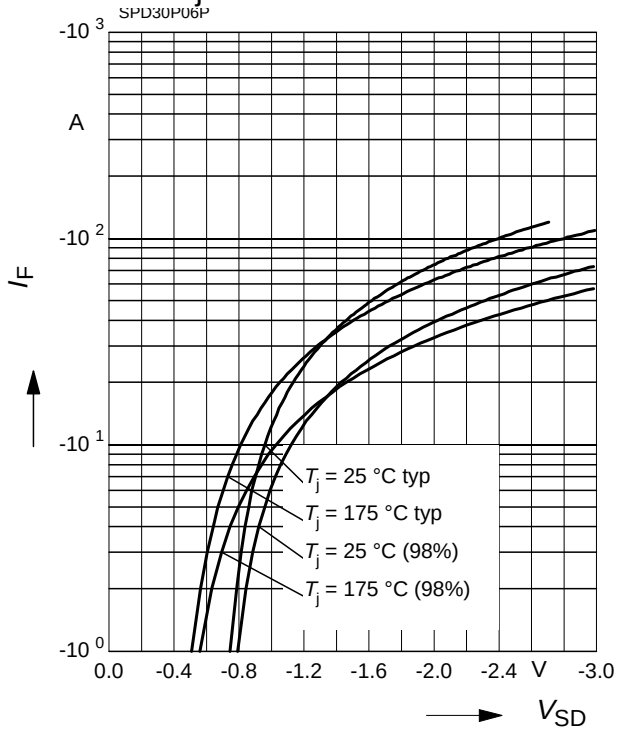

Avalanche energy

$E_{AS} = f(T_j)$

para.: I_D = -30 A , V_{DD} = -25 V, R_{GS} = 25 Ω

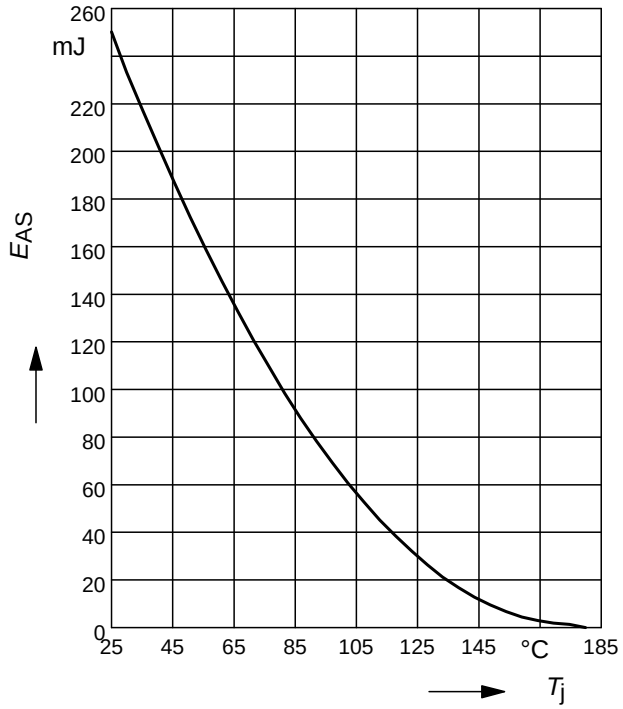

Typ. gate charge

$V_{GS} = f\ (Q_{Gate})$

parameter: I_D = -30 A pulsed

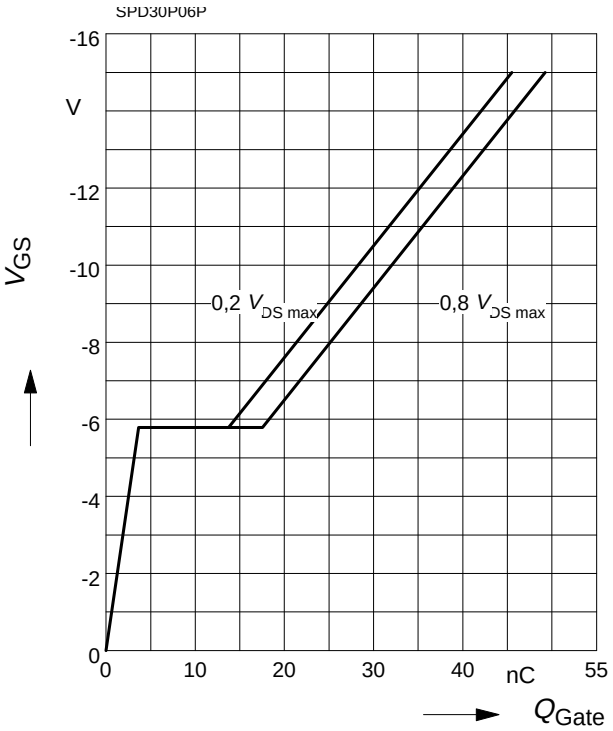

Drain-source breakdown voltage

$V_{(BR)DSS} = f(T_j)$

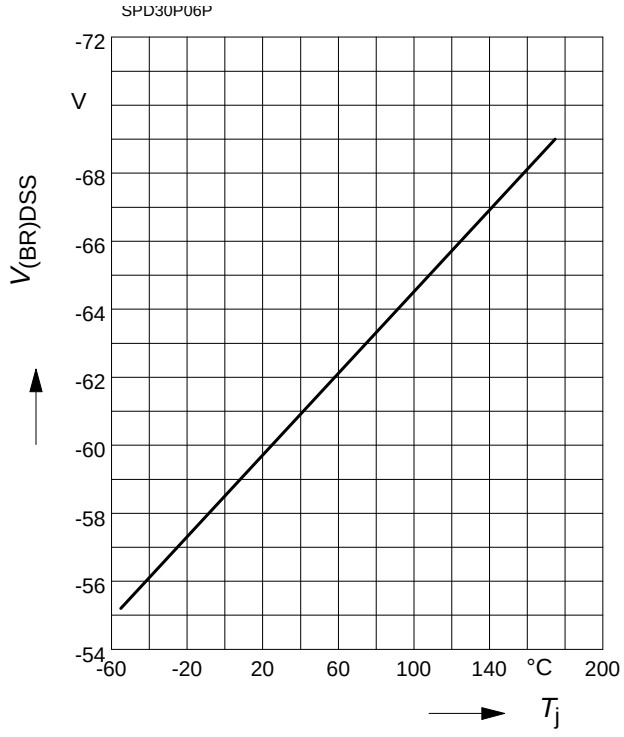

Published by
Infineon Technologies AG,
Bereichs Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!
The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information
For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Reprensatives worldwide (see address list).

Warnings
Due to technical requirements components may contain dangerous substances.
For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.