

MODELS

SQSxxA¹, SQSxxB, SSNxxA, SSNxxB,
SSWxxA, SSWxxB, SPDxxA, SPDxxB



Isolated and bussed circuits



Thin film resistor network

RoHS compliant available

FEATURES

Precision Nichrome Resistors on Silicon	Passivation coating provides protection in humid environments
Industry Standard Packaging	JEDEC 95
Ratio Tolerances	$< \pm 0.05\%$
TCR Tracking Tolerances	$< \pm 5 \text{ ppm}/^{\circ}\text{C}$

SCHEMATICS

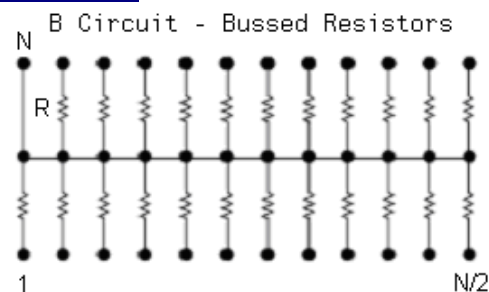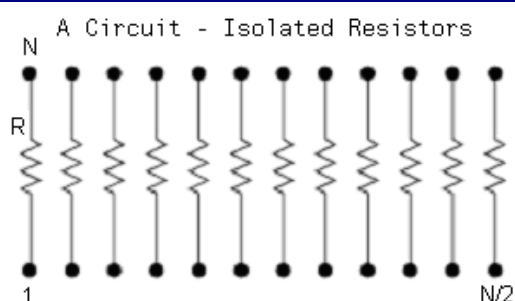

ELECTRICAL²

Standard Resistance Range ³	1K ohms to 100K ohms (Isolated) 1K ohms to 30K ohms (Bussed)
Resistor Tolerances	$\pm 0.25\%$
Ratio Tolerances	$\pm 0.05\%$
TCR	Reference TCR table
Operating Temperature Range	-55°C to $+125^{\circ}\text{C}$
Interlead Capacitance	$< 2 \text{ pF}$
Insulation Resistance	$= 10,000 \text{ Megohms}$
Maximum Operating Voltage	100 Vdc or v PR
Noise, Maximum (MIL-STD-202, Method 308)	-25 dB
Resistor Power Rating at 70°C	0.1 Watts

¹ xx denotes package pin count. Reference package type section in this data sheet for description.

² Specifications subject to change without notice.

³ E96 codes available.

BI Technologies Corporation

4200 Bonita Place
Fullerton, CA 92835 USA

Website: www.bitechnologies.com

May 28, 2008


page 1 of 4

SQSxxA, SQSxxB, SSNxxA, SSNxxB,
SSWxxA, SSWxxB, SPDxxA, SPDxxB

PACKAGE POWER, WATTS @ 70°C⁴

QSOP			SOIC (Narrow)			SOIC (Wide)			P-DIP		
16	20	24	8	14	16	16	20	24	8	14	16
0.6	0.7	0.8	0.4	0.7	0.8	1.0	1.2	1.2	0.4	0.6	0.8

POWER DERATING CURVE

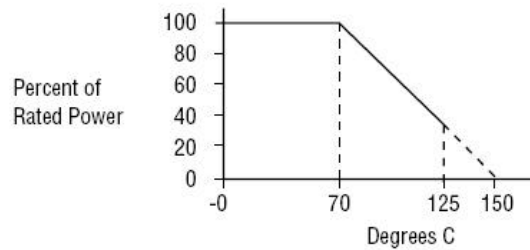

ENVIRONMENTAL (MIL-R-83401)

Thermal Shock plus Power Conditioning	ΔR 0.25%
Short Time Overload	ΔR 0.1%
Terminal Strength	ΔR 0.1%
Moisture Resistance	ΔR 0.2%
Mechanical Shock	ΔR 0.25%
Vibration	ΔR 0.25%
Low Temperature Operation	ΔR 0.05%
High Temperature Exposure	ΔR 0.1%
Resistance to Solder Heat	ΔR 0.1%
Marking Permanency	Per MIL-STD-202, Method 215
Flammability	UL-94V-0 Rated
Storage Temperature Range	-55°C to +125°C


MECHANICAL

Lead Plating	80/20 Tin Lead (Standard) 100 matte Tin (RoHS)
Lead Material	Copper Alloy
Lead Configuration	Gull Wing
Lead Coplanarity	0.004" (0.102 mm)
Substrate Material	Silicon
Resistor Material	Passivated Nichrome
Body Material	Molded Epoxy

⁴ Maximum power per resistor @ 70°C is 100 mW, not to exceed package power.

SQSxxA, SQSxxB, SSNxxA, SSNxxB,
SSWxxA, SSWxxB, SPDxxA, SPDxxB

ORDERING INFORMATION⁵

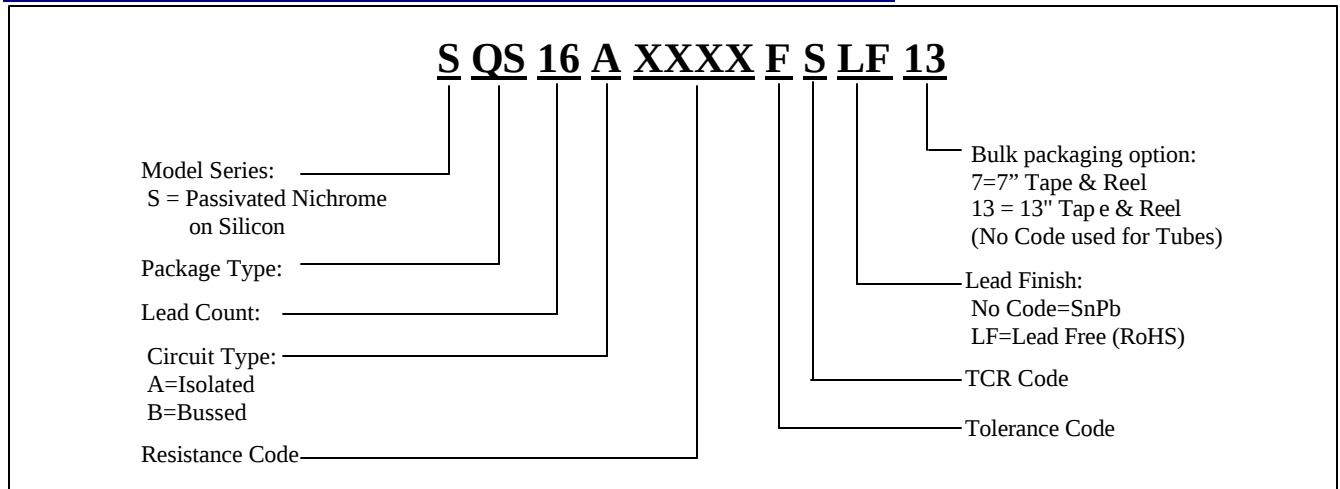

PACKAGE TYPE

	Package Codes	Lead count	Mechanical Outline
QSOP	QS	16, 20, 24	MO-137
SOIC Narrow Body	SN	8, 14, 16	MS-012
SOIC Wide Body	SW	16, 20, 24	MS-013
P-DIP	PD	8, 14, 16	MS-001

RESISTANCE⁵

First 3 digits are significant. Fourth digit denotes number of trailing zeros. For values less than 100, use "R" to denote a decimal point. Example, 51 and 10000 ohms is coded as 51R0 and 1002 respectively. Standard values follow E96.

RESISTANCE TOLERANCE

Accuracy Code at 25°C	CA	CB	D	FA	F	G	J
Absolute Resistance Tolerances (%)	± 0.25	± 0.25	± 0.5	± 1.0	± 1.0	± 2.0	± 5.0
Ratio Tolerances (R1 Ref) (%)	± 0.05	± 0.1	± 0.1	± 0.05	± 1.0	N/A	N/A

TEMPERATURE COEFFICIENT OF RESISTANCE (TCR)

TCR Code (-55°C to 125°C)	Q	P	S	L
Absolute (ppm/°C)	± 25	± 50	± 100	± 200
Tracking (R1 Ref) (ppm/°C)	± 5	± 5	N/A	N/A

⁵ Contact customer service for custom designs and features.

SQSxxA, SQSxxB, SSNxxA, SSNxxB,
SSWxxA, SSWxxB, SPDxxA, SPDxxB

BULK PACKAGING OPTIONS

Model + Pin Count	Quantity		
	7" Reel	13" Reel	Tubes
SQS16	1000	2500	100
SQS20	1000	2500	50
SQS24	1000	2500	50
SSN08	1000	2500	100
SSN14	500	2500	50
SSN16	500	2500	50
SSW16	500	1500	50
SSW20	500	1500	38
SPD08	N/A	N/A	50
SPD14	N/A	N/A	25
SPD16	N/A	N/A	25

TYPICAL MARKING

