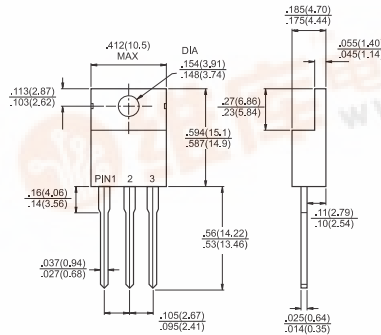


TSC S	SR2020 THRU SR2060 20.0 AMPS. Schottky Barrier Rectifiers						
		Voltage Range 20 to 60 Volts Current 20.0 Amperes					
Features ✧ Low forward voltage drop ✧ High current capability ✧ High reliability ✧ High surge current capability		TO-220  PIN 1  PIN 3  CASE PIN 2 Dimensions in inches and (millimeters)					
Mechanical Data ✧ Cases: TO-220 molded plastic ✧ Epoxy: UL 94V-O rate flame retardant ✧ Terminals: Lead solderable per MIL-STD-202, Method 208 guaranteed ✧ Polarity: As marked ✧ High temperature soldering guaranteed: 260°C/10 seconds .25", (6.35mm) from case. ✧ Weight: 2.24 grams							
Maximum Ratings and Electrical Characteristics Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%							
Type Number	Symbol	SR 2020	SR 2030	SR 2040	SR 2050	SR 2060	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	20.0					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	250					A
Maximum Instantaneous Forward Voltage @ 10.0A	V_F	0.55			0.70		V
Maximum D.C. Reverse Current @ $T_c=25^{\circ}\text{C}$ at Rated DC Blocking Voltage @ $T_c=100^{\circ}\text{C}$	I_R	1.0 50					mA mA
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	1.0					°C/W
Typical Junction Capacitance (Note 2)	C_j	430			360		pF
Operating Junction Temperature Range	T_J	-65 to +125			-65 to +150		°C
Storage Temperature Range	T_{STG}	-65 to +150					°C

Notes: 1. Thermal Resistance from Junction to Case Per Leg, with Heatsink size (4"x6"x0.25") Al-Plate.

2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES (SR2020 THRU SR2060)

FIG.1- FORWARD CURRENT DERATING CURVE

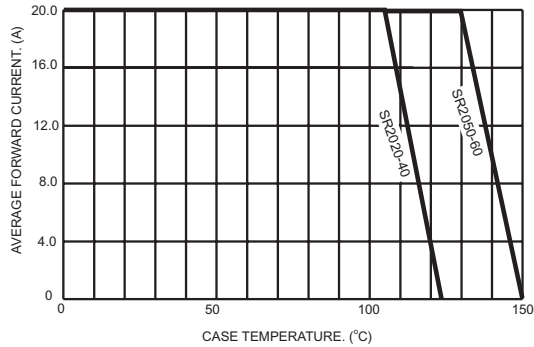


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

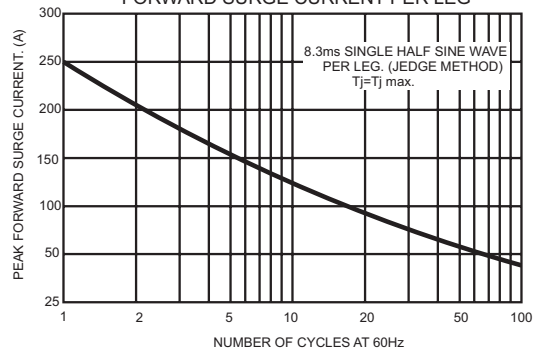


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER LEG

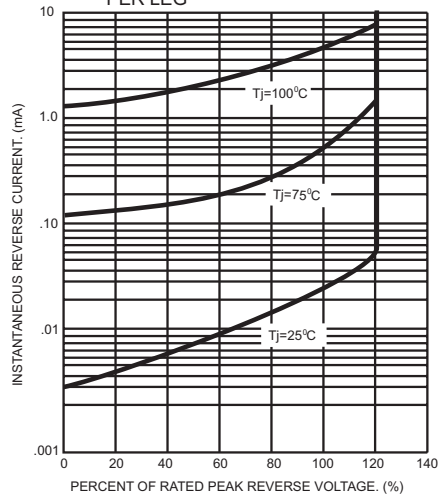


FIG.4- TYPICAL FORWARD CHARACTERISTICS PER LEG

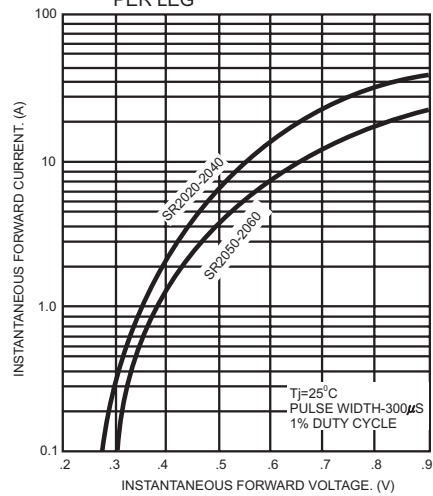


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG

