



SS12 – SS16
1A 片式肖特基二极管
1A SCHOTTKY SMA DIODES

型 号 TYPE	印 字 Marking	反 向 重 复 峰 值 电 压 $V_{RRM}(V)$	正 向 平 均 电 流 $I_F(A)$	正 向 峰 值 电 压 $V_F(V)$	反 向 峰 值 电 流 $I_{RMI}(\mu A)$	正 向 浪 涌 电 流 $I_{P8M}(A)$	反 向 恢 复 时 间 $T_{rr}(ns)$	外形尺寸 Package Dimensions
SS12	S12	20	1.0	0.50	1000	30	—	DO – 214AC
SS13	S13	30		0.50			—	
SS14	S14	40		0.50			—	
SS15	S15	50		0.70			—	
SS16	S16	60		0.70			—	




A	B	C	D	E	F	G	H
$\frac{.110(2.8)}{.086(2.2)}$	$\frac{.067(1.7)}{.051(1.3)}$	$\frac{.008}{(.2)} \text{ MAX}$	$\frac{.091(2.3)}{.067(1.7)}$	$\frac{.051(1.3)}{.008(0.2)}$	$\frac{.059(1.5)}{.035(0.9)}$	$\frac{.209(5.3)}{.185(4.7)}$	$\frac{.059(1.5)}{.035(0.9)}$

DO – 214AC

SS12 – SS16

1A 片式肖特基二极管额定值与特性曲线

RATING & CHARACTERISTIC CURVES OF 1A SCHOTTKY SMA DIODES

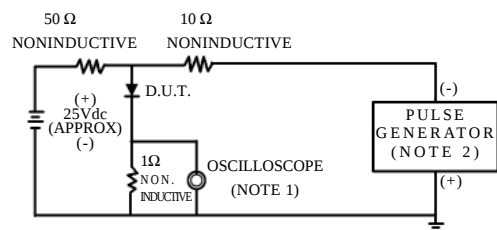 FIG.1-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC


NOTES:1.Rise Time=7ns max.
Input Impedance=1megohm.22pF.
2.Rise Time=10ns max.
Source Impedance=50 ohms.





 FIG. 2 - TYPICAL FORWARD
CURRENT DERATING CURVE

 FIG. 3 - TYPICAL REVERSE
CHARACTERISTICS

 FIG. 4 - TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

 FIG. 5 - MAXIMUM NON-REPETITIVE
FORWARD SURGE CURRENT


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

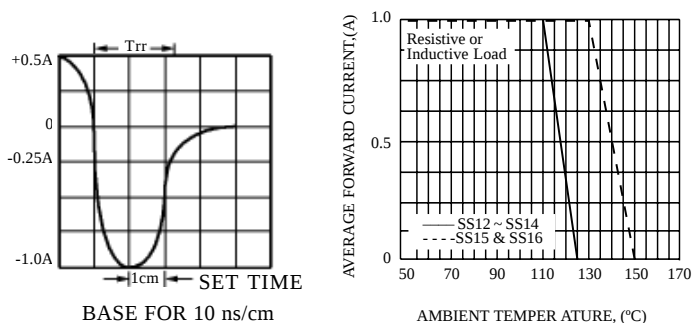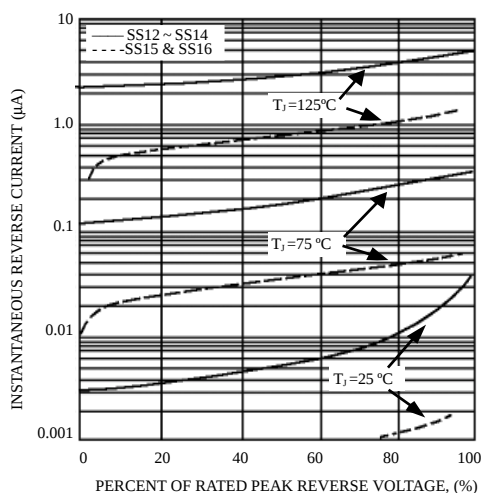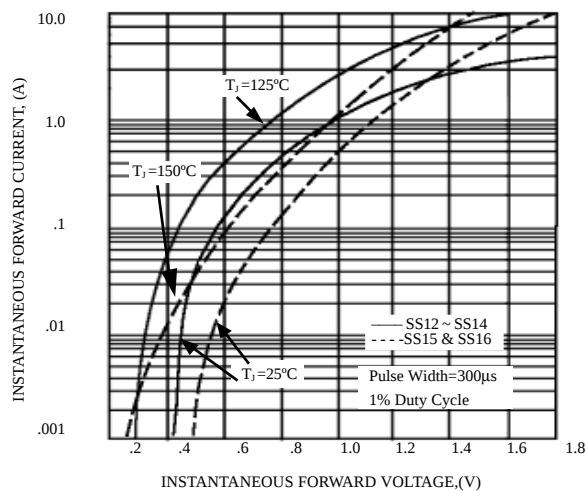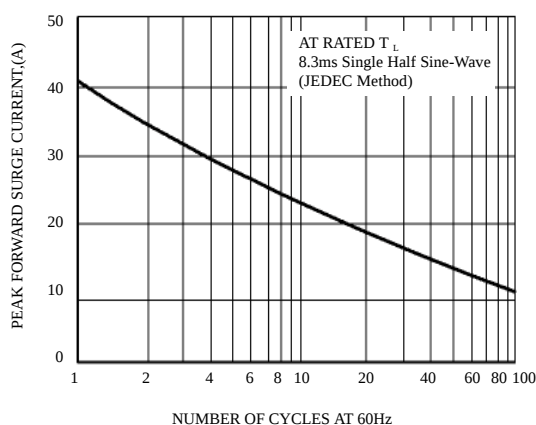