

# International **IR** Rectifier

## PHASE CONTROL THYRISTORS

Bulletin I25169 rev. C 04/00

# **ST380CH..C SERIES**

## Hockey Puk Version

## Features



- Center amplifying gate
  - Metal case with ceramic insulator
  - International standard case TO-200AB (E-PUK)
  - Low profile hockey-puk to increase current-carrying capability
  - Extended temperature range

## Typical Applications

- DC motor controls
  - Controlled DC power supplies
  - AC controllers

## Major Ratings and Characteristics

Parameters	ST380CH..C	Units	
$I_{T(AV)}$	960	A	
@ $T_{hs}$	80	°C	
$I_{T(RMS)}$	2220	A	
@ $T_{hs}$	25	°C	
$I_{TSM}$	@ 50Hz	12500	A
	@ 60Hz	13000	A
$I^2t$	@ 50Hz	782	$KA^2s$
	@ 60Hz	713	$KA^2s$
$V_{DRM}/V_{RRM}$	400 to 600	V	
$t_q$	typical	100	μs
$T_J$	- 40 to 150	°C	

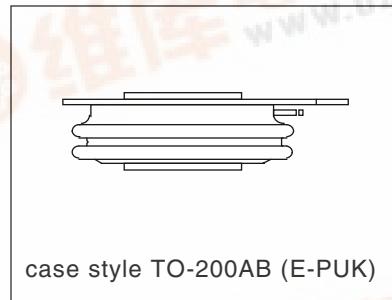

## ST380CH..C Series

Bulletin I25169 rev. C 04/00

International  
**IR** Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{DRM}/V_{RRM}$ , max. repetitive peak and off-state voltage V	$V_{RSM}$ , maximum non-repetitive peak voltage V	$I_{DRM}/I_{RRM}$ max. @ $T_J = T_{J\max}$ mA
ST380CH..C	04	400	500	100
	06	600	700	

#### On-state Conduction

Parameter	ST380CH..C	Units	Conditions
$I_{T(AV)}$ Max. average on-state current @ Heatsink temperature	960 (440)	A	180° conduction, half sine wave double side (single side) cooled
	80 (110)	°C	
$I_{T(RMS)}$ Max. RMS on-state current	2220	A	DC @ 25°C heatsink temperature double side cooled
$I_{TSM}$ Max. peak, one-cycle non-repetitive surge current	12500		t = 10ms No voltage reapplied
	13000		t = 8.3ms 100% $V_{RRM}$ reapplied
	10500		t = 10ms No voltage reapplied
	11000		t = 8.3ms 100% $V_{RRM}$ reapplied
$I^2t$ Maximum $I^2t$ for fusing	782	KA <sup>2</sup> s	Sinusoidal half wave, Initial $T_J = T_{J\max}$ .
	713		
	553		
	505		
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	7820	KA <sup>2</sup> \sqrt{s}	t = 0.1 to 10ms, no voltage reapplied
$V_{T(TO)1}$ Low level value of threshold voltage	0.85	V	(16.7% $\times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)}$ ), $T_J = T_{J\max}$
$V_{T(TO)2}$ High level value of threshold voltage	0.88		( $I > \pi \times I_{T(AV)}$ ), $T_J = T_{J\max}$ .
$r_{t1}$ Low level value of on-state slope resistance	0.25	mΩ	(16.7% $\times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)}$ ), $T_J = T_{J\max}$
$r_{t2}$ High level value of on-state slope resistance	0.24		( $I > \pi \times I_{T(AV)}$ ), $T_J = T_{J\max}$ .
$V_{TM}$ Max. on-state voltage	1.58	V	$I_{pk} = 2900A$ , $T_J = T_{J\max}$ , $t_p = 10ms$ sine pulse
$I_H$ Maximum holding current	600	mA	$T_J = 25^\circ C$ , anode supply 12V resistive load
$I_L$ Typical latching current	1000		

#### Switching

Parameter	ST380CH..C	Units	Conditions
$di/dt$ Max. non-repetitive rate of rise of turned-on current	1000	A/μs	Gate drive 20V, $20\Omega$ , $t_r \leq 1\mu s$ $T_J = T_{J\max}$ , anode voltage $\leq 80\%$ $V_{DRM}$
$t_d$ Typical delay time	1.0	μs	Gate current 1A, $di_g/dt = 1A/\mu s$ $V_d = 0.67\% V_{DRM}$ , $T_J = 25^\circ C$
$t_q$ Typical turn-off time	100		$I_{TM} = 550A$ , $T_J = T_{J\max}$ , $di/dt = 40A/\mu s$ , $V_R = 50V$ $dv/dt = 20V/\mu s$ , Gate 0V $100\Omega$ , $t_p = 500\mu s$

### Blocking

Parameter	ST380CH..C	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/ $\mu$ s	$T_J = T_J$ max. linear to 80% rated $V_{DRM}$
$I_{RRM}$ $I_{DRM}$ Max. peak reverse and off-state leakage current	100	mA	$T_J = T_J$ max, rated $V_{DRM}/V_{RRM}$ applied

### Triggering

Parameter	ST380CH..C	Units	Conditions
$P_{GM}$ Maximum peak gate power	10.0	W	$T_J = T_J$ max, $t_p \leq 5ms$
$P_{G(AV)}$ Maximum average gate power	2.0		$T_J = T_J$ max, $f = 50Hz$ , $d\% = 50$
$I_{GM}$ Max. peak positive gate current	3.0	A	$T_J = T_J$ max, $t_p \leq 5ms$
+ $V_{GM}$ Maximum peak positive gate voltage	20	V	
- $V_{GM}$ Maximum peak negative gate voltage	5.0		$T_J = T_J$ max, $t_p \leq 5ms$
$I_{GT}$ DC gate current required to trigger	TYP. 200 100 40	MAX. - 200 -	mA $T_J = -40^\circ C$ $T_J = 25^\circ C$ $T_J = 150^\circ C$
$V_{GT}$ DC gate voltage required to trigger	2.5 1.8 1.0	- 3.0 -	V $T_J = -40^\circ C$ $T_J = 25^\circ C$ $T_J = 150^\circ C$
$I_{GD}$ DC gate current not to trigger	10	mA	
$V_{GD}$ DC gate voltage not to trigger	0.25	V	$T_J = T_J$ max Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated $V_{DRM}$ anode-to-cathode applied

### Thermal and Mechanical Specification

Parameter	ST380CH..C	Units	Conditions
$T_J$ Max. operating temperature range	-40 to 150	$^\circ$ C	
$T_{stg}$ Max. storage temperature range	-40 to 150		
$R_{thJ-hs}$ Max. thermal resistance, junction to heatsink	0.09 0.04	K/W	DC operation single side cooled DC operation double side cooled
$R_{thC-hs}$ Max. thermal resistance, case to heatsink	0.02 0.01	K/W	DC operation single side cooled DC operation double side cooled
F Mounting force, $\pm 10\%$	9800 (1000)	N (Kg)	
wt Approximate weight	83	g	
Case style	TO - 200AB (E-PUK)		See Outline Table

## ST380CH..C Series

Bulletin I25169 rev. C 04/00

International  
**IR** Rectifier

### $\Delta R_{thJ-hs}$ Conduction

(The following table shows the increment of thermal resistance  $R_{thJ-hs}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.010	0.011	0.007	0.007	K/W	$T_J = T_{J \text{ max.}}$
120°	0.012	0.012	0.012	0.013		
90°	0.015	0.015	0.016	0.017		
60°	0.022	0.022	0.023	0.023		
30°	0.036	0.036	0.036	0.037		

### Ordering Information Table

Device Code		ST   38   0   CH   06   C   1							
		1	2	3	4	5	6	7	8
<b>1</b>	- Thyristor								
<b>2</b>	- Essential part number								
<b>3</b>	- 0 = Converter grade								
<b>4</b>	- CH = Ceramic Puk, High temperature								
<b>5</b>	- Voltage code: Code x 100 = $V_{RRM}$ (See Voltage Rating Table)								
<b>6</b>	- C = Puk Case TO-200AB (E-PUK)								
<b>7</b>	- 0 = Eyelet terminals (Gate and Auxiliary Cathode Unsoldered Leads) 1 = Fast-on terminals (Gate and Auxiliary Cathode Unsoldered Leads) 2 = Eyelet terminals (Gate and Auxiliary Cathode Soldered Leads) 3 = Fast-on terminals (Gate and Auxiliary Cathode Soldered Leads)								
<b>8</b>	- Critical dv/dt: None = 500V/ $\mu$ sec (Standard selection) L = 1000V/ $\mu$ sec (Special selection)								

Outline Table

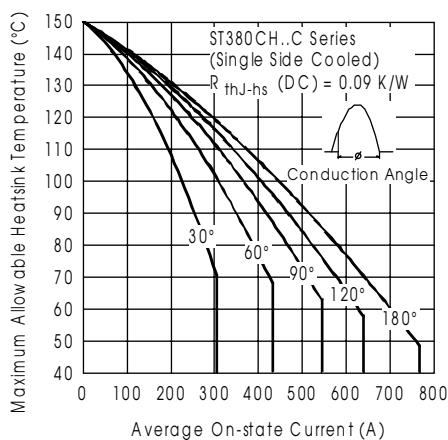
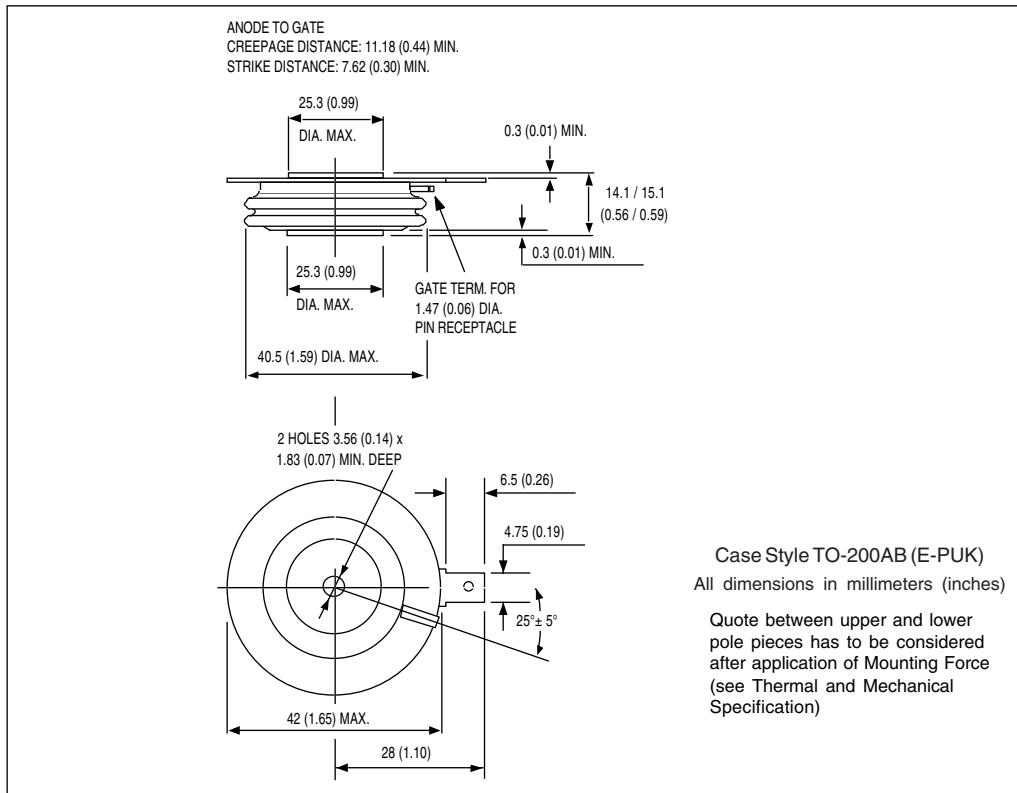


Fig. 1 - Current Ratings Characteristics

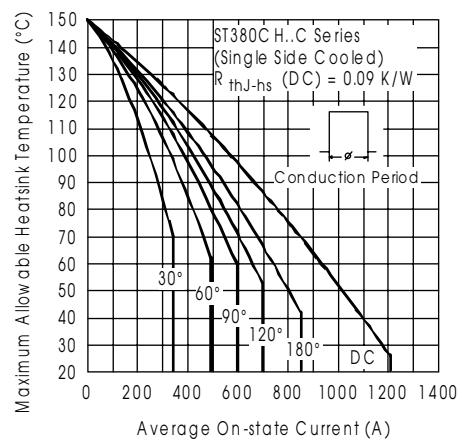


Fig. 2 - Current Ratings Characteristics

## ST380CH..C Series

Bulletin I25169 rev. C 04/00

International  
**IR** Rectifier

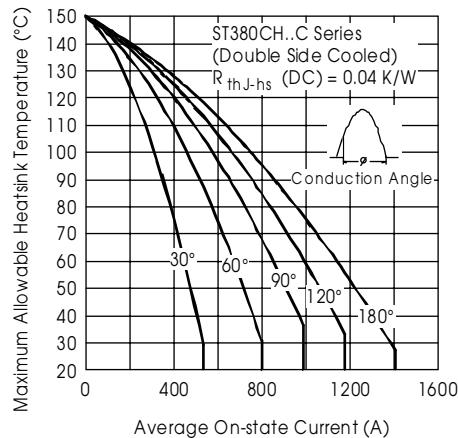


Fig. 3 - Current Ratings Characteristics

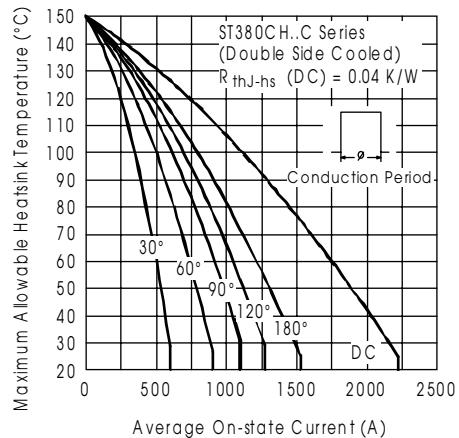


Fig. 4 - Current Ratings Characteristics

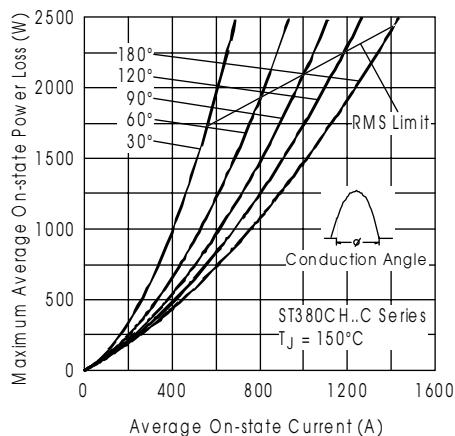


Fig. 5 - On-state Power Loss Characteristics

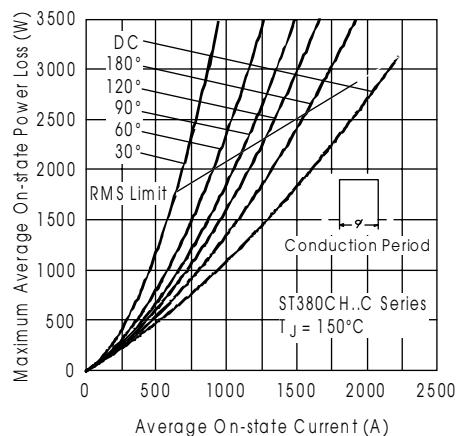


Fig. 6 - On-state Power Loss Characteristics

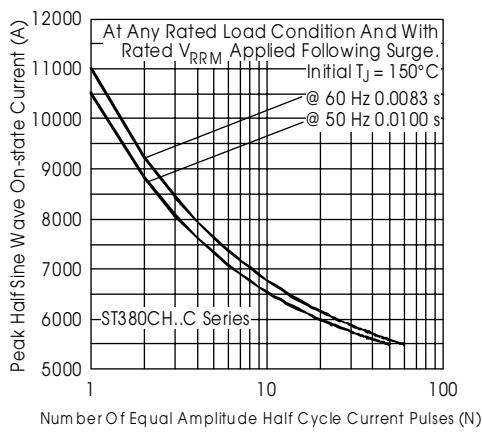


Fig. 7 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

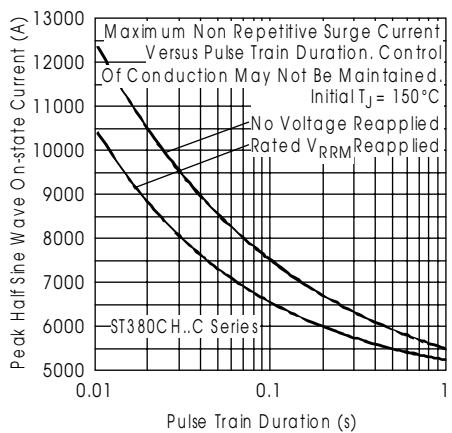


Fig. 8 - Maximum Non-Repetitive Surge Current Single and Double Side Cooled

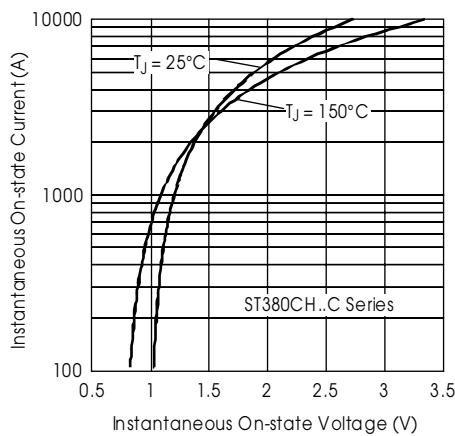


Fig. 9 - On-state Voltage Drop Characteristics

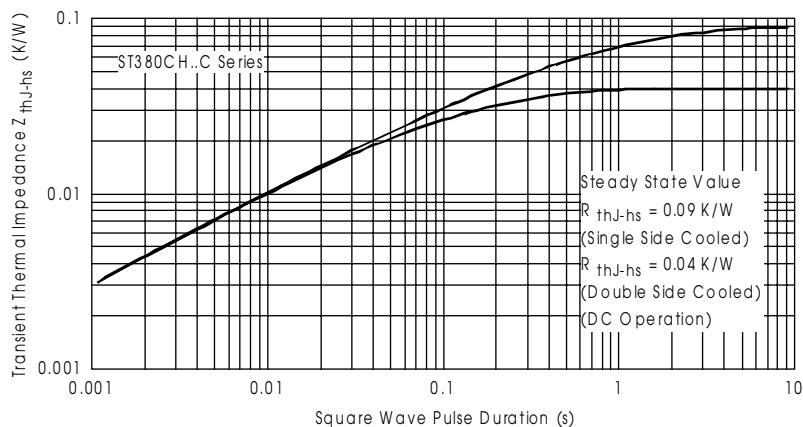


Fig. 10 - Thermal Impedance  $Z_{thJ-hs}$  Characteristics

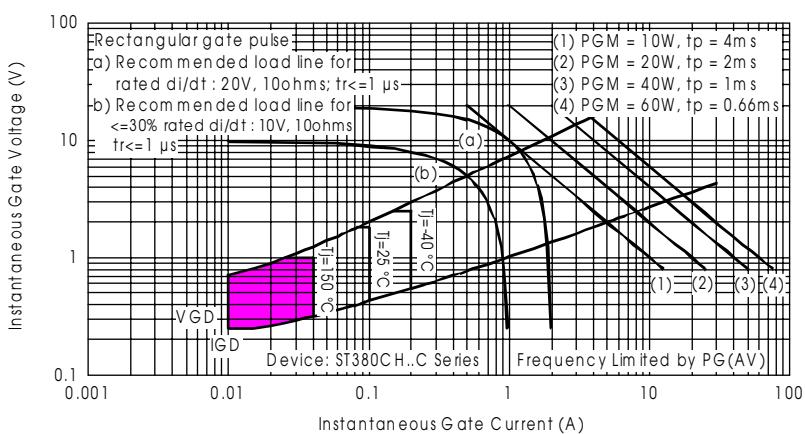


Fig. 11 - Gate Characteristics