



SamHop Microelectronics Corp.

# STS 2336A

Dec 26 2004



## N-Channel Enhancement Mode Field Effect Transistor

### PRODUCT SUMMARY

| V <sub>DS</sub> | I <sub>D</sub> | R <sub>DS(ON)</sub> (mΩ) Max                             |
|-----------------|----------------|----------------------------------------------------------|
| 20V             | 3A             | 60@ V <sub>GS</sub> = 4.5V<br>120@ V <sub>GS</sub> =2.5V |

### FEATURES

- Super high dense cell design for low R<sub>DS(ON)</sub>.
- Rugged and reliable.
- SOT-23 package.



### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter                                                                            | Symbol                            | Limit      | Unit |
|--------------------------------------------------------------------------------------|-----------------------------------|------------|------|
| Drain-Source Voltage                                                                 | V <sub>DS</sub>                   | 20         | V    |
| Gate-Source Voltage                                                                  | V <sub>GS</sub>                   | ±10        | V    |
| Drain Current-Continuous <sup>a</sup> @ T <sub>J</sub> =25°C<br>-Pulsed <sup>b</sup> | I <sub>D</sub>                    | 3          | A    |
|                                                                                      | I <sub>DM</sub>                   | 12         | A    |
| Drain-Source Diode Forward Current <sup>a</sup>                                      | I <sub>S</sub>                    | 1.25       | A    |
| Maximum Power Dissipation <sup>a</sup>                                               | P <sub>D</sub>                    | 1.25       | W    |
| Operating Junction and Storage Temperature Range                                     | T <sub>J</sub> , T <sub>STG</sub> | -55 to 150 | °C   |

### THERMAL CHARACTERISTICS

|                                                      |                   |     |      |
|------------------------------------------------------|-------------------|-----|------|
| Thermal Resistance, Junction-to-Ambient <sup>a</sup> | R <sub>thJA</sub> | 100 | °C/W |
|------------------------------------------------------|-------------------|-----|------|

# STS 2336A

ELECTRICAL CHARACTERISTICS (TA =25 °C unless otherwise noted)

| Parameter                              | Symbol              | Condition                                                                                             | Min | Typ <sup>c</sup> | Max  | Unit  |
|----------------------------------------|---------------------|-------------------------------------------------------------------------------------------------------|-----|------------------|------|-------|
| OFF CHARACTERISTICS                    |                     |                                                                                                       |     |                  |      |       |
| Drain-Source Breakdown Voltage         | BV <sub>DSS</sub>   | V <sub>GS</sub> =0V, I <sub>D</sub> =250uA                                                            | 20  |                  |      | V     |
| Zero Gate Voltage Drain Current        | I <sub>DSS</sub>    | V <sub>DS</sub> =16V, V <sub>GS</sub> =0V                                                             |     |                  | 1    | uA    |
| Gate-Body Leakage                      | I <sub>GSS</sub>    | V <sub>GS</sub> =±10V, V <sub>DS</sub> =0V                                                            |     |                  | ±100 | nA    |
| ON CHARACTERISTICS <sup>b</sup>        |                     |                                                                                                       |     |                  |      |       |
| Gate Threshold Voltage                 | V <sub>GS(th)</sub> | V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> = 250uA                                             | 0.5 | 0.8              | 1.5  | V     |
| Drain-Source On-State Resistance       | R <sub>DS(ON)</sub> | V <sub>GS</sub> =4.5V, I <sub>D</sub> = 2.5A                                                          |     | 50               | 60   | m-ohm |
|                                        |                     | V <sub>GS</sub> = 2.5V, I <sub>D</sub> = 1A                                                           |     | 90               | 120  | m-ohm |
| On-State Drain Current                 | I <sub>D(ON)</sub>  | V <sub>DS</sub> = 5V, V <sub>GS</sub> = 4.5V                                                          | 8   |                  |      | A     |
| Forward Transconductance               | g <sub>FS</sub>     | V <sub>DS</sub> = 5V, I <sub>D</sub> =2.5A                                                            |     | 6                |      | S     |
| DYNAMIC CHARACTERISTICS <sup>c</sup>   |                     |                                                                                                       |     |                  |      |       |
| Input Capacitance                      | C <sub>ISS</sub>    | V <sub>DS</sub> =10V, V <sub>GS</sub> = 0V<br>f =1.0MHz                                               |     | 330              |      | pF    |
| Output Capacitance                     | C <sub>OSS</sub>    |                                                                                                       |     | 110              |      | pF    |
| Reverse Transfer Capacitance           | C <sub>RSS</sub>    |                                                                                                       |     | 60               |      | pF    |
| SWITCHING CHARACTERISTICS <sup>c</sup> |                     |                                                                                                       |     |                  |      |       |
| Turn-On Delay Time                     | t <sub>D(ON)</sub>  | V <sub>DD</sub> = 10V,<br>I <sub>D</sub> = 1A,<br>V <sub>GS</sub> = 4.5V,<br>R <sub>GEN</sub> = 6 ohm |     | 9.2              |      | ns    |
| Rise Time                              | t <sub>r</sub>      |                                                                                                       |     | 6.8              |      | ns    |
| Turn-Off Delay Time                    | t <sub>D(OFF)</sub> |                                                                                                       |     | 6.1              |      | ns    |
| Fall Time                              | t <sub>f</sub>      |                                                                                                       |     | 8.3              |      | ns    |
| Total Gate Charge                      | Q <sub>g</sub>      | V <sub>DS</sub> =10V, I <sub>D</sub> = 2.5A,<br>V <sub>GS</sub> =4.5V                                 |     | 4.7              |      | nC    |
| Gate-Source Charge                     | Q <sub>gs</sub>     |                                                                                                       |     | 1.6              |      | nC    |
| Gate-Drain Charge                      | Q <sub>gd</sub>     |                                                                                                       |     | 1.3              |      | nC    |

# STS 2336A

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25 °C unless otherwise noted)

| Parameter                                       | Symbol          | Condition                                   | Min | Typ <sup>c</sup> | Max | Unit |
|-------------------------------------------------|-----------------|---------------------------------------------|-----|------------------|-----|------|
| DRAIN-SOURCE DIODE CHARACTERISTICS <sup>b</sup> |                 |                                             |     |                  |     |      |
| Diode Forward Voltage                           | V <sub>SD</sub> | V <sub>GS</sub> = 0V, I <sub>S</sub> =1.25A |     | 0.81             | 1.2 | V    |

### Notes

- a.Surface Mounted on FR4 Board, t<sub>l</sub>≤10sec.
- b.Pulse Test:Pulse Width ≤ 300us, Duty Cycle ≤ 2%.
- c.Guaranteed by design, not subject to production testing.

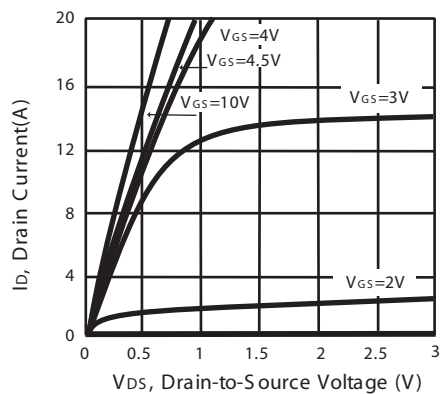


Figure 1. Output Characteristics

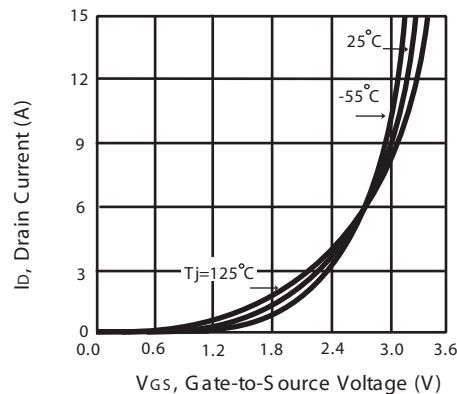


Figure 2. Transfer Characteristics

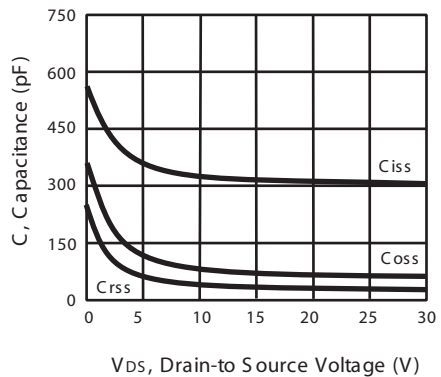


Figure 3. Capacitance


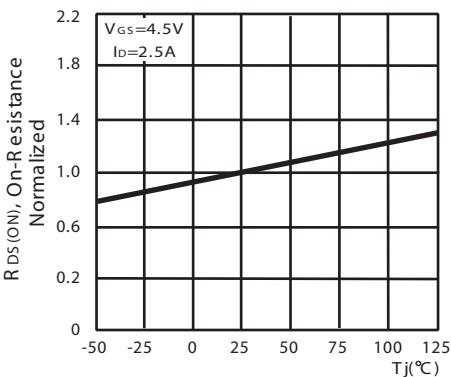


Figure 4. On-Resistance Variation with Temperature

# STS 2336A

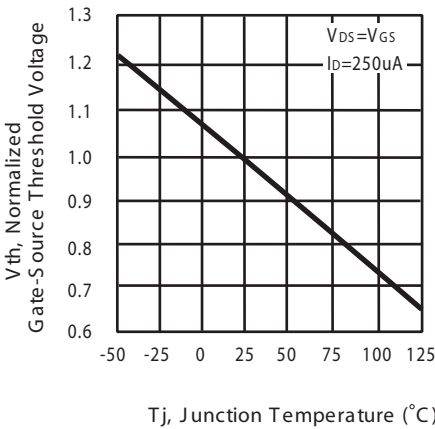

with Temperature

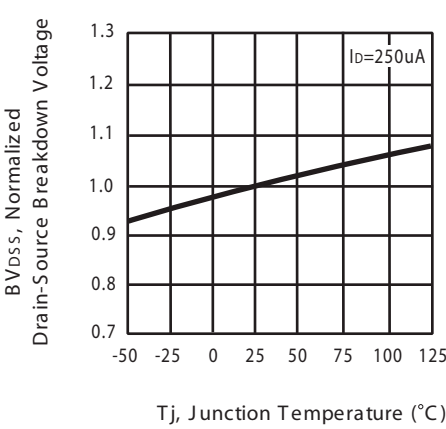


Figure 6. Breakdown Voltage Variation with Temperature

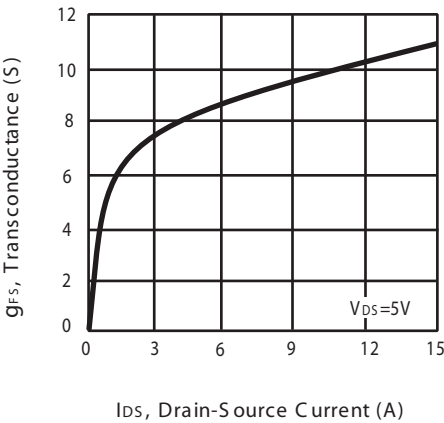


Figure 7. Transconductance Variation with Drain Current

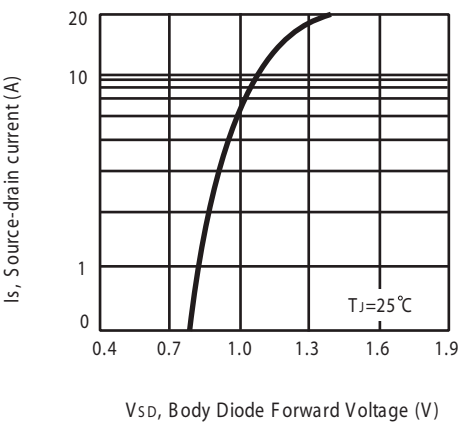


Figure 8. Body Diode Forward Voltage Variation with Source Current

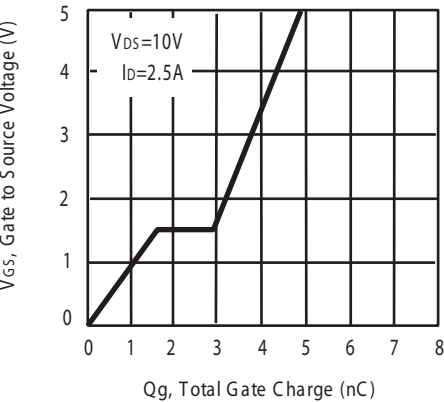


Figure 9. Gate Charge

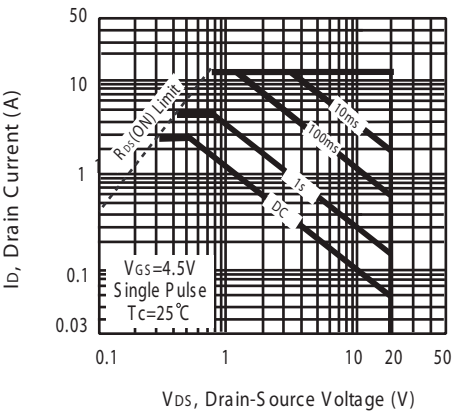


Figure 10. Maximum Safe Operating Area

# STS 2336A

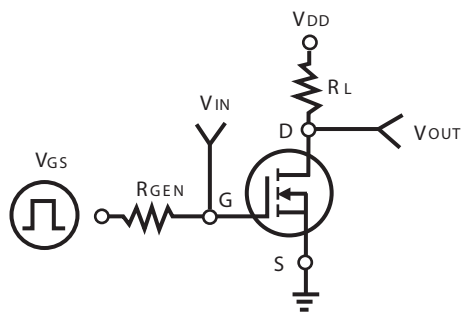


Figure 11. S switching Test Circuit

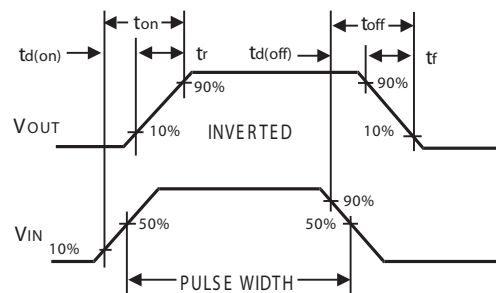


Figure 12. Switching Waveforms

