

TOSHIBA**TA8302F**

TENTATIVE TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA8302F

MOTOR DRIVER FOR CAMERA


TA8302F is Multi Chip IC incorporates 6 low saturation discrete transistors which equipped bias resistor and Free-Wheeling diode.

This IC is suitable for a camera use motor drive applications.


FEATURES

- Suitable for high efficiency motor drive circuit.
- Built-in Bias Resistor : $R = 10k\Omega$
- Built-in Free-Wheeling Diode : Only Lower side
- Small package sealed : SSOP16
- Low saturation voltage

BLOCK DIAGRAM

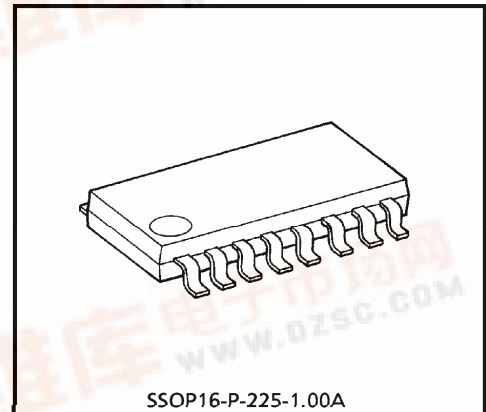

Weight : 0.14g (Typ.)

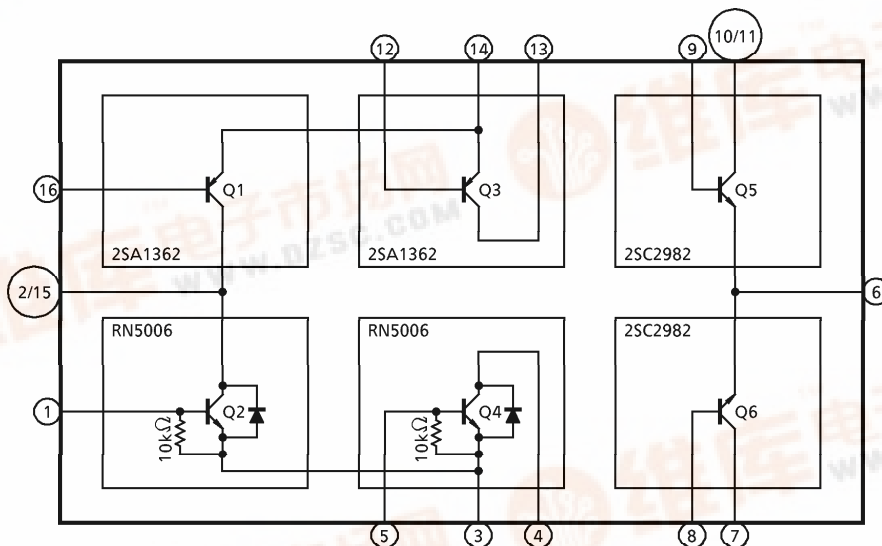

980910EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

FUNCTION DESCRIPTION ON EACH TERMINAL

PIN No.	FUNCTION
1	Tr. Q2 Input Terminal
2	Tr. Q1, Q2 Output Terminal
3	Tr. Q2, Q4 GND
4	Tr. Q4 Output Terminal
5	Tr. Q4 Input Terminal
6	Tr. Q5, Q6 GND
7	Tr. Q6 Output Terminal
8	Tr. Q6 Input Terminal
9	Tr. Q5 Input Terminal
10	Tr. Q5 Output Terminal
11	Tr. Q5 Output Terminal
12	Tr. Q3 Input Terminal
13	Tr. Q3 Output Terminal
14	Tr. Q1, Q3 Supply Voltage
15	Tr. Q1, Q2 Output Terminal
16	Tr. Q1 Input Terminal

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	7.0	V
Breakdown Voltage	V_{CBO}	7.0	V
	V_{CEO}	7.0	V
	V_{EBO}	5.0	V
Output Current	I_{OUT}	0.8	A
Base Current	I_B	0.4	A
Power Dissipation	P_D	490	mW
Junction Temperature	T_j	150	°C
Operating Temperature	T_{opr}	- 20~60	°C
Storage Temperature	T_{stg}	- 55~150	°C

980910EBA2'

- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	MEASURING Tr	TEST CIR- CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Current Gain	h _{FE} 1	2SA1362	—	V _{CE} = - 1V, I _C = - 100mA	120	—	700	
	h _{FE} 2	2SC2982	—	V _{CE} = - 1V, I _C = 500mA	140	—	600	
	h _{FE} 3	RN5006	—	V _{CE} = - 1V, I _C = 500mA	160	—	600	
Saturation Voltage	V _{CE} 1	2SA1362	—	I _C = - 600mA, I _B = - 10mA	- 0.5	—	—	V
	V _{CE} 2	2SC2982	—	I _C = 600mA, I _B = 20mA	—	—	0.5	V
	V _{CE} 3	RN5006	—	I _C = 600mA, I _B = 20mA	—	—	0.5	V
Leakage Current	I _{OFF}		—	V _{CC} = 7V	—	—	1.0	μA
Base-Emitter Forward Voltage	V _{BE} 1	2SA1362	—	V _{CE} = - 1V, I _C = - 600mA	- 1.0	—	- 0.65	V
	V _{BE} 2	2SC2982	—	V _{CE} = 1V, I _C = 600mA	0.5	—	0.9	V
Diode Forward Voltage	V _F	RN5006	—	I _F = 300mA	—	0.89	1.2	V
Transition Frequency	f _{T1}	2SA1362	—	V _{CE} = - 5V, I _C = - 10mA	—	—	120	MHz
	f _{T2}	2SC2982	—	V _{CE} = 1V, I _C = 500mA	—	—	150	MHz
	f _{T3}	RN5006	—	V _{CE} = 1V, I _C = 500mA	—	—	140	MHz

OUTLINE DRAWING

SSOP16-P-225-1.00A

Unit : mm

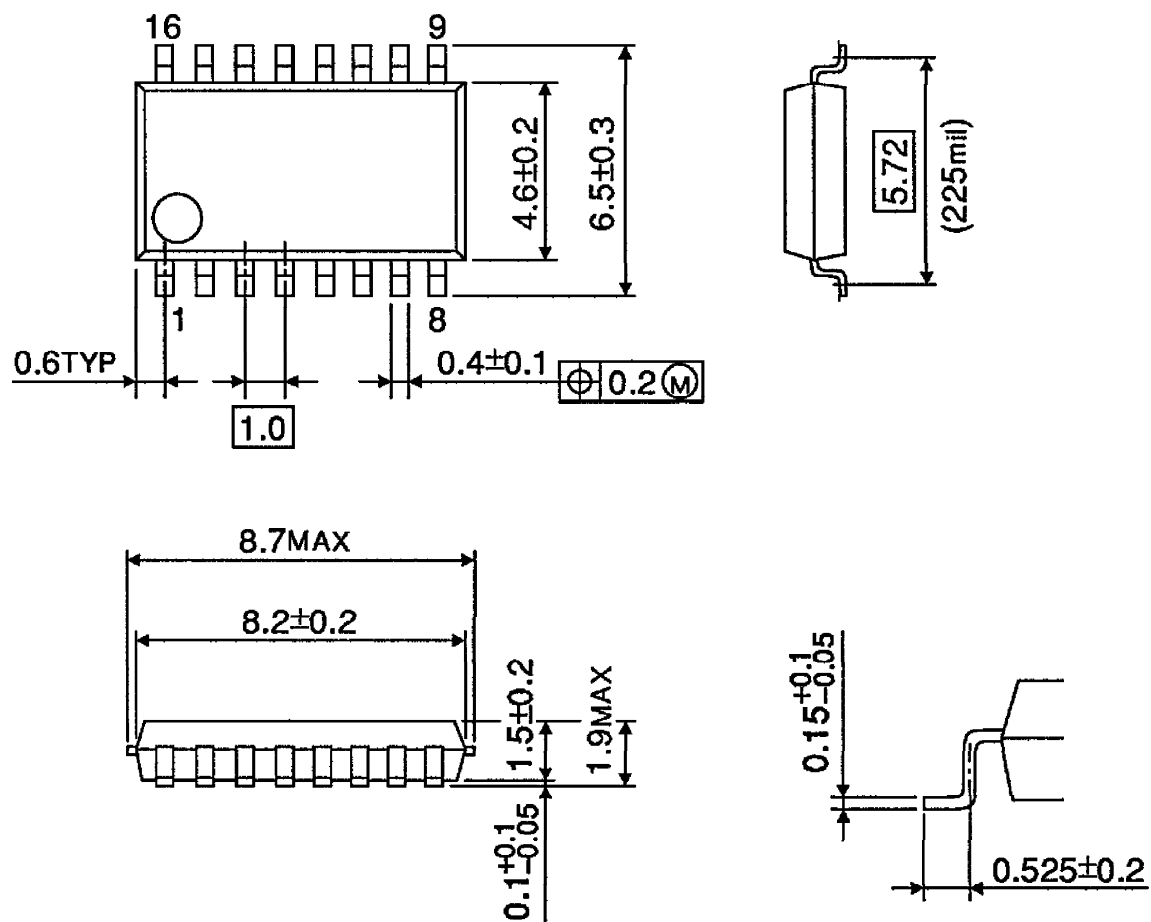

Weight : 0.14g (Typ.)