

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: TRF600-150-RB-B-0.5

DOCUMENT: SCD 26036
 PCN: A71956-000
 REV LETTER: D
 REV DATE: MARCH 28, 2006
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Max Electrical Rating at 20°C

Operating Voltage: 250V_{DC}

Interrupt Current: 3A_{RMS}

Fault Voltage: 600V_{RMS}

Lead Material: 22 AWG Sn plated copper
 (0.65 mm [0.026"] nominal diameter)

Marking:

Raychem Logo
 Part Identification
 RoHS Indication
 150 F
 Lot Identification

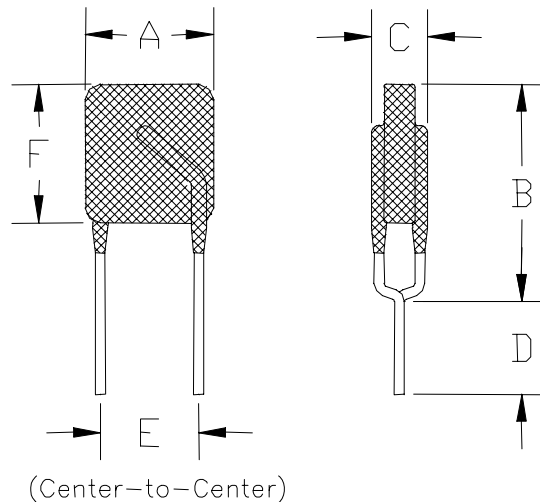


TABLE I. DIMENSIONS

	A		B		C		D		E	F	
	Min	Max	Min	Max	Min	Max	Min	Max	Nom	Min	Max
mm:	--	9.0	--	12.5	--	4.6	4.7	--	5.0	--	9.0
in:	--	(0.354)	--	(0.492)	--	(0.180)	(0.185)	--	(0.197)	--	(0.354)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

IHOLD (A)**	ITRIP (A)	RESISTANCE (Ω)			TIME TO TRIP (s) @ 1A		OPERATING TEMPERATURE (°C)	
		R MIN	R MAX	R _{1 MAX} *	TYP	MAX	MIN	MAX
0.130	0.300	9.0	12.0	22.0	1.0	3.0	-40	85

*Maximum device resistance at 20°C measured 1 hour post trip.

**Dependant on heat sinking.

Resistance Matched 0.5 Ohm
 Designed to assist equipment meet UL60950

Agency Recognitions: UL, CSA, TUV
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

ROHS Compliant

Directive 2002/95/EC
 Compliant

ELV Compliant

Directive 2000/53/EC
 Compliant

Pb-Free

